PRODUCT ATLAS 2024

Tel: +971 56811168 / +971 544771239

Email: info@beitalkareema.com

Add: 5 17A St, Al Khabaisi, Dubai P.O.Box 10776





We are FAST Lighting

FAST

FAST is a pursuer of minimalism. The small details of each product have been fully considered. Our product designers advocate design aesthetics and pursue the ultimate appearance. The light performance of each FAST product has been planned from the beginning of the concept. The minimalist appearance, meticulous production process and quality have achieved the best balance.

FAST's products include more than 100 styles, which can meet the needs of most scene atmosphere indoor lighting. From home to commercial lighting, from direct lighting to indirect lighting, from objects to space scenes, we provide the best lighting solutions according to modern trends demand. We are recognized by customers and lighting designers all over the world with the best LED technology and stylish and simple design.


R&D

The designers of our R & D department according the new trend of technology and creates the best and most efficient lighting solutions by constantly learning new materials, processes, technologies, methods and applications.

FAST provides excellent solutions with efficiency, flexibility and functionality to layout the global market.

welcome to our world

Our world map

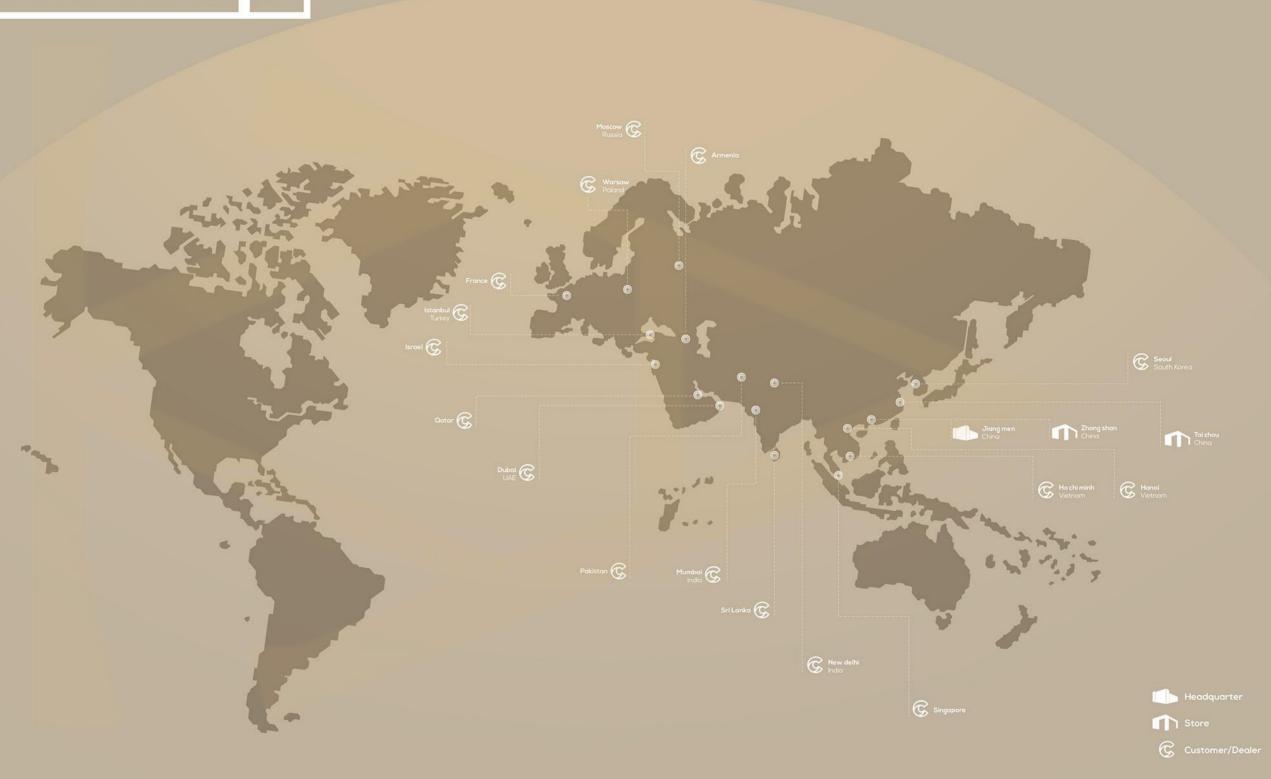

Product integrity Anti dazzle optics Professional optical solutions Downlight lighting Artistic pendant lamp Outdoor lighting Special lighting for art gallery High quality space lighting Courtesy effect light Commercial lighting











When engineering a new luminaire, there are several factors to consider: aesthetic and functional needs of the final fixture;

accurate selection of the light sources, the materials and their heat sink capacity, and technologies to be used; achievement of the best lighting emission.

The creation of a functional prototype is an important step, that allows the improvements of all the elements and a precise balance of the creative stages progression.



FACTORY

Our Aim is to offer to our customers products of actual design representative of our time, thanks to a strong commitment and great creativity.

The attentive selection of materials and accurate finishing, as well as the research and development of the manufacturing process; make our products durable and reliable; a cutting – edge for the market worldwide.

Each creation is a challenge: understanding, analyzing and projecting to reach harmony and fusion of structure, light, architecture and setting.



MACHINING CENTER

Every product is a piece of art, in order to pursue quality we introduce a number of processing center platform.

Grinding out the best products, high-precision machines are indispensable, each step of the processing needs to be accurate, processing center to provide us with a good processing experience.



WORKMANSHIP

Our lamps are characterized by high quality and fine manufacturing, which requires different manufacturing processes.

We are passionate about every step of the production process from mold manufacturing to die casting, as well as the quality inspection to ensure the soundness and mechanical properties.



ASSEMBLY

Electrical and Mechanical assembly lines follow procedures and operating instructions to assemble luminaires.

A trained and specialized staff is in charge for the tests of quality of the products that have to be in compliance with regulation in force. Particular attention is given to the electrical safety checks on the luminaires.



PACKING AND DELIVERY


Every product is carefully prepared and packaged. A truly excellent work is now ready to be shipped to all parts of the world. FAST sells in many countries and regions around the

KAREEMA
FAST LIGHTING 009/010

Color rending is revealing the colors of object under light source, the closer to the nature light or standard light thebetter it will be.

A color rendering index (RRI) is a quantitative measure of the ability of a light source to reveal the colors of various objects faithfully in comparison with an idea or natural light source. Light sources with a higher CRI, it can better to reveal the colors of various objects faithfully.





ANTI GLARE

The precise anti glare controlled design of FAST lighting is applied for the knowledge of secondary optical refraction curve design and good electroplate dealing resulted in high performance of flicker free in dark light. The beam angle of luminaire is up to 40° which creates a quiet and comfortable lighting atmosphere without seeing the lamp.

LED CHIP

The chip is the most important part of the lamps, which plays a decisive role in the lighting , FAST lighting using high efficiency, high color rending, long lifeled chip, make sure the lamp with energy saving , efficient , stable quality .



CHIP ON BOARD

The light of COB is evenly like the incandescent bulb without double image. The light from COB fixture looks natural and clean, while there is double image for SMD fixture.

NATURAL LIGHT

Natural light, fitting with COB generates the lights even and soft , making the subject natural and clean and consequently, creating strong dimensinal effect.

LIGHT WITH TOOTHED AND DOUBLE IMAGE

Light from SMD fixture will make the subject with blurry edge with double images and week perspective.





CERTIFICTIONS













LED CHIP

COOPERATION PARTNERS













EPISTAR

The above enterprises are ranked in no order and are only used for display. If you have any questions, please contact us

LED DRIVER

COOPERATION PARTNERS

PHILIPS

TRIDONIC Lifud

OPTIC

COOPERATION PARTNERS








KAREEMA

FAST LIGHTING 011/012

ICONS

Explanation of icons in the directory





Human body infrared sensing

Induction or light sensing





Class III products



















German rheinland certification



RoHS RoHS standard products













SAA typeapproved

Interchang refl ector

Adjustable beam angle

Flicker-free

products

RGB Versions

Interchangeable











SMD SMD Surface mount led

Anti-dazzle

COB Chip on board

Dimming triac

Dimming two

Tunable White

Versions

Touch dimming

DALI dimming

1-10 Volt SCR dimming

LED COLOURS

Knowledge about some LED colors



SOFT START & GLOW OUT

Debug every detail of lighting perception



Soft Start

Designed to protect the LED electronics from harsh load on startup. A soft startup reduces the load on input and increases the life of the electronics.

Glow Out

Turn off the power and gradually turn off the light source. No violent cut-off or sudden closing. This subtle effect is to produce the most natural lighting experience.

COLOR FINISHES

Introduction to the color of the finished product

POWDER SPRAY







PGG

Sand Grain Gold









PGB









SPRAY PAINT (LIQUID)

Sand Grain Black



SPC





SPG 2







ANODIZED















ELECTROPLATE

ABW White Anodizing





















ERG







ESR





ECH



PLASTIC







KAREEMA FAST LIGHTING 013/014





021-030

AGILITY IN RO

SP6162

031-034

DOT

051-056

SP6125



SP6157

UNIT 1

SP6126

057-066

035-040



DROPLET

SP6158

UNIT 2 UP

SP6164

057-066

035-040



EVA SP

L HALF

SP6147

041-050

PACO

067-072

SP6119







EVA SP SFS SP6134 041-050

AMPHI

SP19B

073-078







AUGUS M WL6813





Wall Light (OUTDOOR)

Wall Light (ON)

VISSA RO OV WL6810B 133-138

LEAD RE

WL6815D

139-144

GENIE

PL6510

153-158

173-176

CYLINDER

VISSA RO RI WL6810D 133-138

VISSA RO HALF WL6810K 133-138

VISSA RO LI2 WL6810L 133-138

VISSA RO CI WL6810H 133-138

SLS SP6136 041-050

EVA SP

0



CURVE RO SP19C







PATON

SF6319

087-092



MITO

093-098

SF6318



EVA SF

SF6312

041-050

ON S FS RO



EVA SP

SF6317

041-050

ON L LS RO





PUPILLA RO SF6308

099-104





PL6511

153-158

AIM R3

145-150

WL6816D





PL6512

153-158



FAST-1015

159-162



PL6504

163-166



167-172

Surface Mounted Downlight



YURI ON M2

SF6133

021-030

107-110



111-116



MN6707

117-120





MN6706

1177-120



KATYA PL6503 177-180

FLOWING

219-220

PENDANTS

COMPOSING

LIGHT

221-222









LIGHTING

TOOLKIT

227-228



TYPES

229-238



LUMINAIRES

TYPES

229-238



LUMINAIRES

TYPES

229-238

TYPES

229-238





LUMINAIRES **LUMINAIRES TYPES TYPES**

229-238

LUMINAIRES **TYPES**



TYPES

229-238



229-238





229-238



BELT

TERMINATIONS 239-240

Ceiling embedded lamp



YURI

YURI series with streamlined appearance, lightweight design and different swing methods, will become a classic product.

YURI has a series of wattage (3w, 7W, 10W), size and different optical angle. It is suitable for local lighting, such as home decoration lighting or oil painting lighting. It can also be used as space lighting to illuminate the whole space environment.

Simple and superior technical performance enables you to create unique lighting solutions.


IP20 | ⊕DC | @ | (€ | § | RoHS





KAREEMA

FAST LIGHTING 023/024

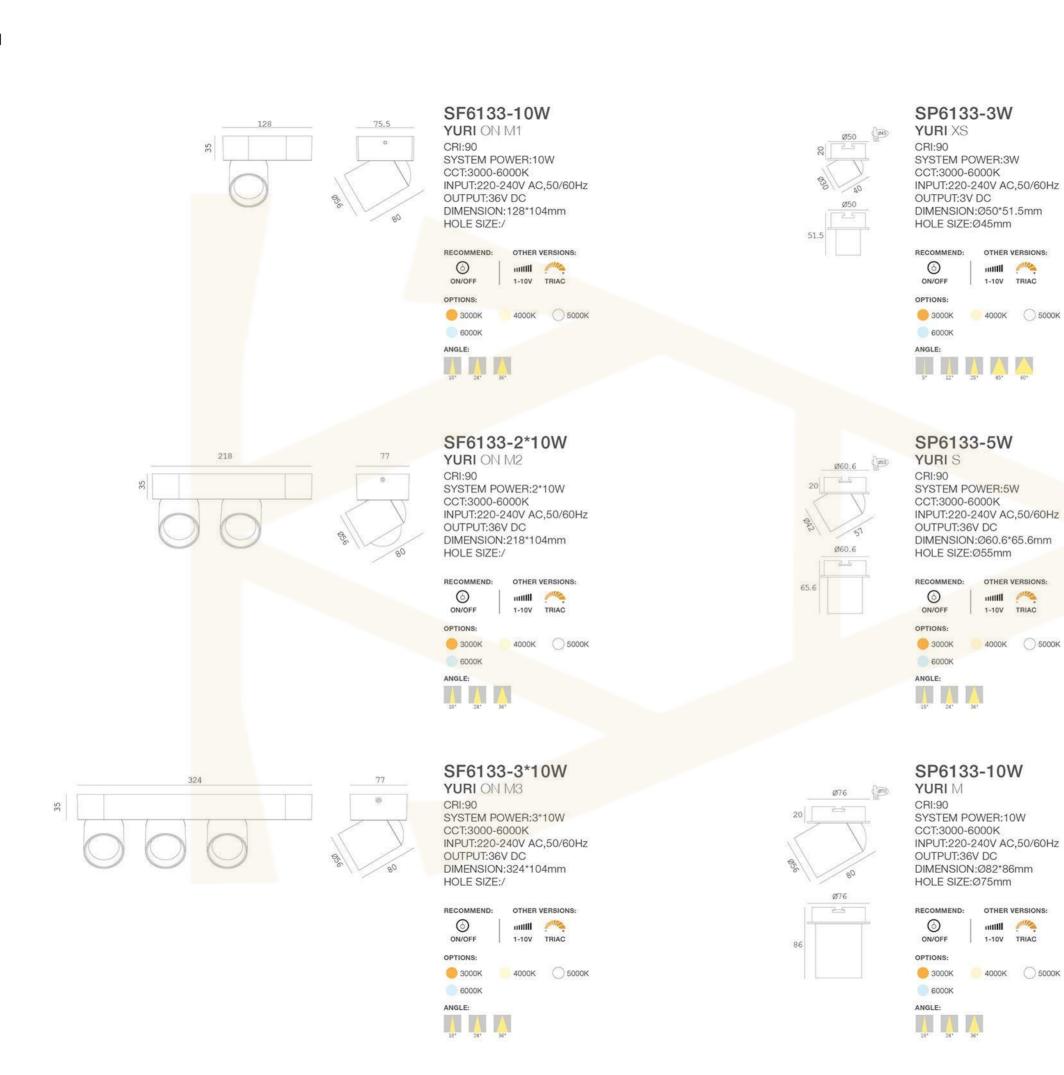







AGILITY

The AGILITY series comes with a ceiling embedded and edge less installation method.

The flexible characteristics are suitable for various usage scenarios, and the stretching type lamp body height adjustment and new swing structure are all exclusive features of AGILITY.

| IP20 | -- ○ Anti-glare | - ⊕ DC | ((() | (() | () | RoHS



RO TRIMLESS

84

SP6162-12W

AGILITY RO

CRI:>90 SYSTEM POWER:12W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:Ø84*105mm HOLE SIZE:Ø75mm

RECOMMEND:



3000K 4000K ○ 5000K 6000K

ANGLE:

15° 24° 36° 50°

SP6163-12W 84 AGILITY SQ

CRI:>90 SYSTEM POWER:12W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:84*84*105mm HOLE SIZE:75*75mm

RECOMMEND:




OPTIONS:





ANGLE: 15° 24° 36° 50°

SP6163-3*12W AGILITY SQ 3



CRI:>90 SYSTEM POWER:3*12W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:229*85*105mm HOLE SIZE:220*77mm

4000K 5000K

RECOMMEND:



OPTIONS:




6000K





SP6162T-12W



SYSTEM POWER:12W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:Ø105*105mm HOLE SIZE:Ø75mm

RECOMMEND:










SP6163-2*12W **AGILITY** SQ 2



CRI:>90 SYSTEM POWER:2*12W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION: 157*85*105mm HOLE SIZE:150*77mm

RECOMMEND:



OPTIONS @ 3000K

ANGLE:













KAREEMA

FAST LIGHTING 033/0

CORNER

The CORNER series adopts a curved diffuser design combined with the bionic design of "Nautilus shape", which not only increases the heat dissipation area but also improves the heat dissipation effect.

Deep anti-glare is the best visual comfort. There are two styles to choose first: fixed style and adjustable angle style.

1P20 | - ○ Anti-glare | - DC | @ | (€ | § | RoHS






360°





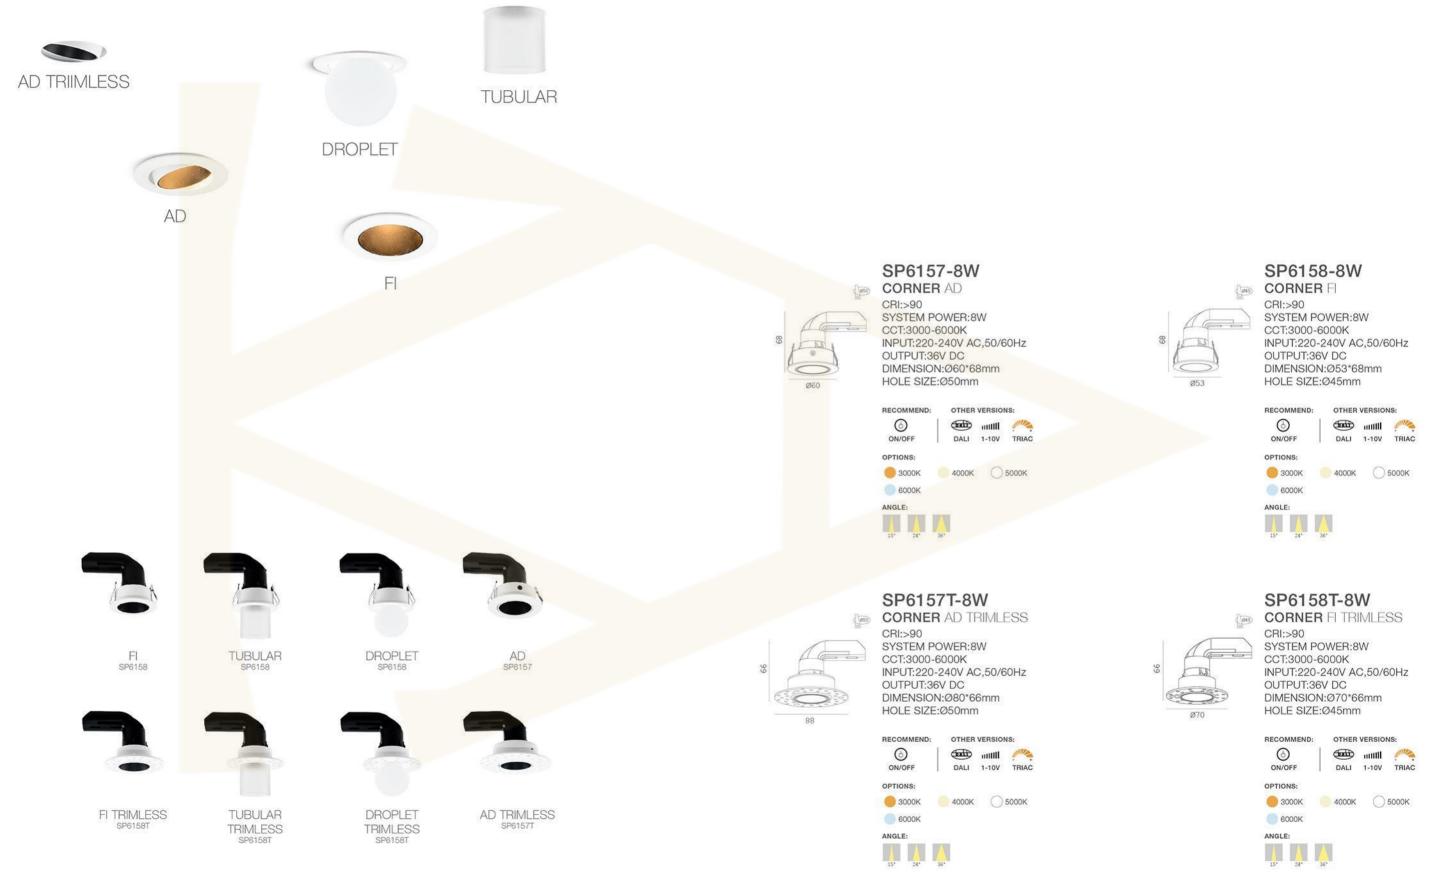






EVA

EVA series, ultra-thin radiator installation solution, suitable for places where the height of the ceiling is insufficient, a variety of optical structures can be selected, concentrating, lens, flooding, etc. At the same time, it provides installation methods such as embedded installation and surface installation. The embedded installation is divided into fixed swing angles and rich optical structure combinations, which can meet the light application of various occasions and environments. A variety of beam angles, color temperature, power and other options are definitely the best product matching for engineering cases and interior design.

IP20 | - Soft light | ⊕ DC | ((€ | (§ | RoHS | COB/SMD

FIXED

SWING

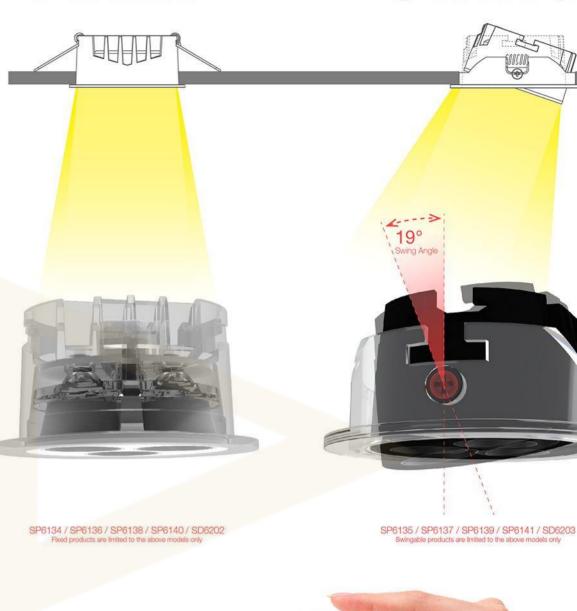




PGW






White Sa



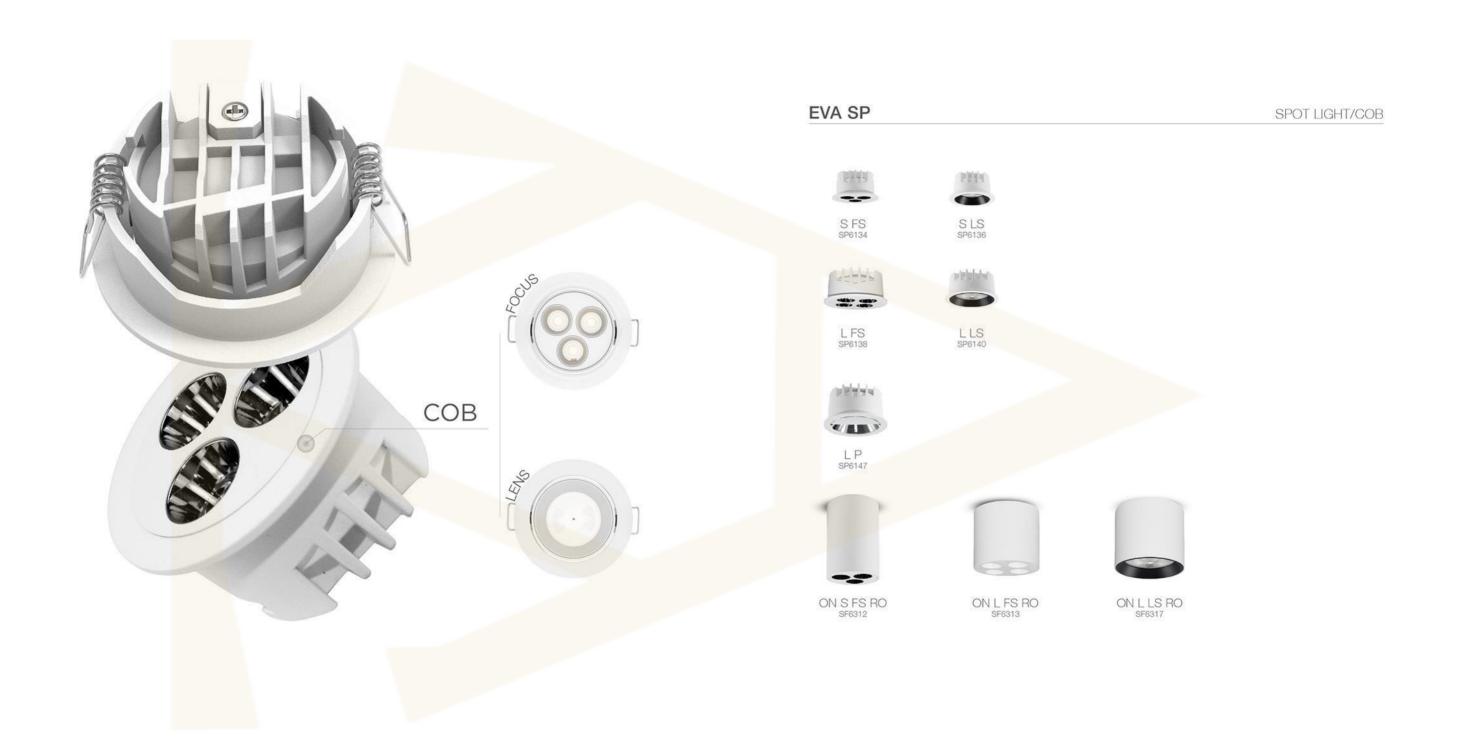

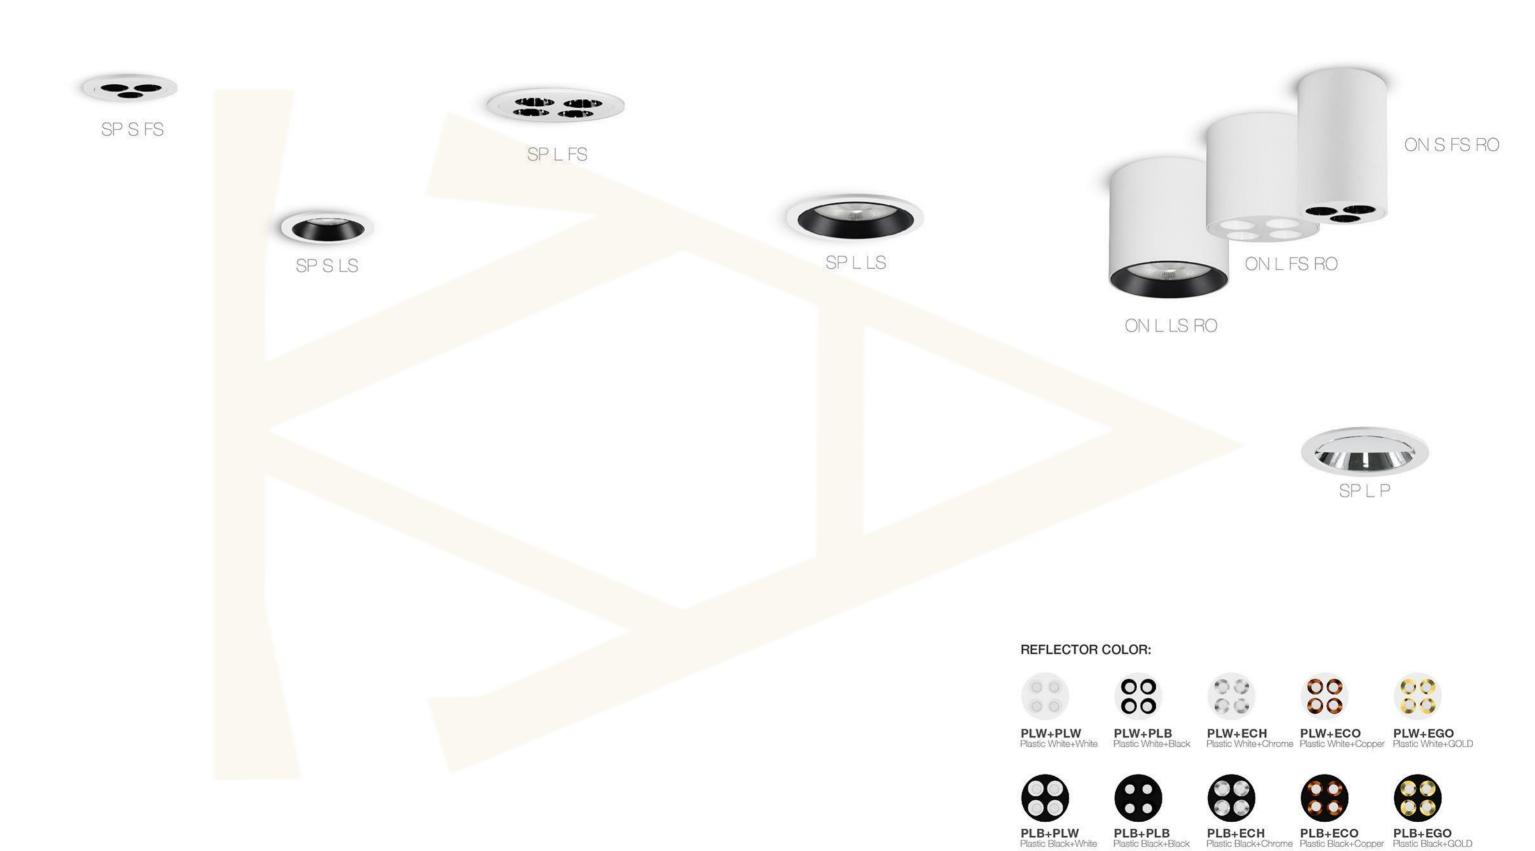



SP6134 EVA SP S FS

CRI:90 SYSTEM POWER:7W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:9V DC DIMENSION:Ø58.5*31mm HOLE SIZE:Ø50mm





SP6140 EVA SP L LS

CRI:90 SYSTEM POWER:12W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:082.5*37mm HOLE SIZE:075mm






SP6136 EVA SPSLS

CRI:90 SYSTEM POWER:7W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:Ø58.5*31mm HOLE SIZE:Ø50mm





SP6138 EVA SP L FS

CRI:90 SYSTEM POWER:10W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:12V DC DIMENSION:Ø82.5*37mm HOLE SIZE:Ø75mm





Ø12

SF6313 EVA SP ON L FS RO

CRI:90 SYSTEM POWER:10W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:12V DC DIMENSION:Ø72*65mm HOLE SIZE:/





SF6312

EVA SP ON S FS RO

CRI:90 SYSTEM POWER:7W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:9V DC DIMENSION:Ø49*65mm HOLE SIZE:/






SF6317 EVA SP ON L LS RO

CRI:90 SYSTEM POWER:12W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:Ø72*65mm HOLE SIZE:/









SP6147-12W EVA SP L P

CRI:90
SYSTEM POWER:12W
CCT:3000-6000K
INPUT:220-240V AC,50/60Hz
OUTPUT:36V DC
DIMENSION:Ø83.5*46mm
HOLE SIZE:Ø75mm


ON/OFF DALI 1-10V TRIAC
OPTIONS:

3000K 4000K 5000K

ANGLE:





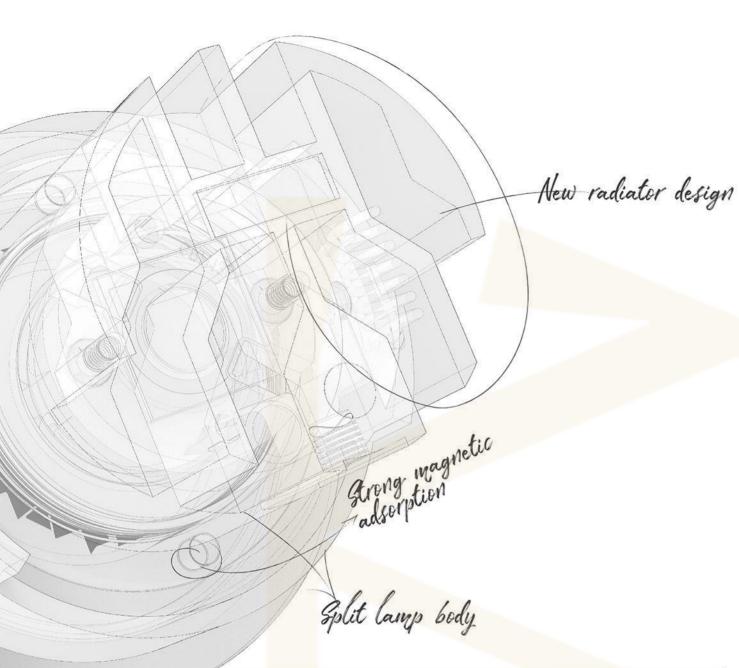

DOT series, is a modular lighting products, through the total into magnetic suction surface cover and lamp fission design scheme, make the maintenance more convenient way of change, more effectively solved the problems of replacement, but also introduced a lot of reflective surface on the color selection can be DIY, deep light glare prevention effect, can meet a variety of indoor light environment. The new radiator appearance takes high style and efficient heat dissipation as the design concept, the design aesthetics and optics get the best integration.

DOT










Hidden light source anti-glare



DOT / UNIT SPLIT DETAILS

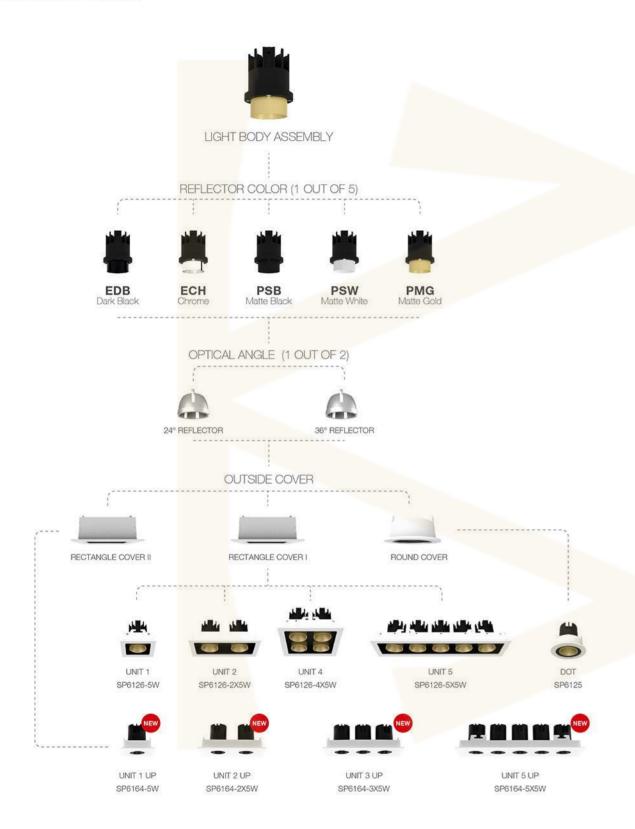










SP6125-5W DOT

CRI:>90 SYSTEM POWER:5W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:060*55.7mm HOLE SIZE:055mm






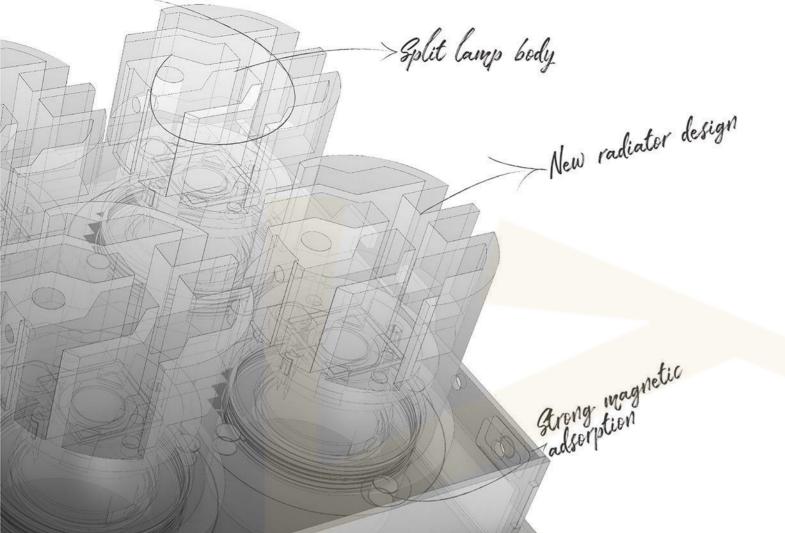


UNIT

UNIT series, with a single lamp body as the design unit, can be freely combined into single-head or multi-head combination through the cover module. The magnetic suction design is a major feature of UNIT, which is easy to replace and very practical. The dazzling effect can meet a variety of indoor lighting environments. The new appearance of the radiator is designed with high style and efficient heat dissipation, and the design aesthetics and optics are the best fusion.








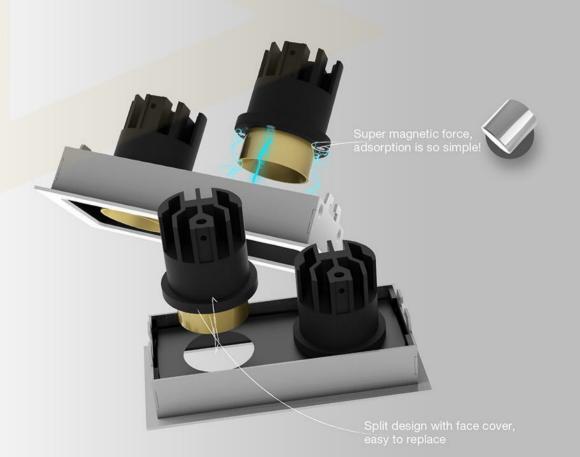

DOT / UNIT SPLIT DETAILS

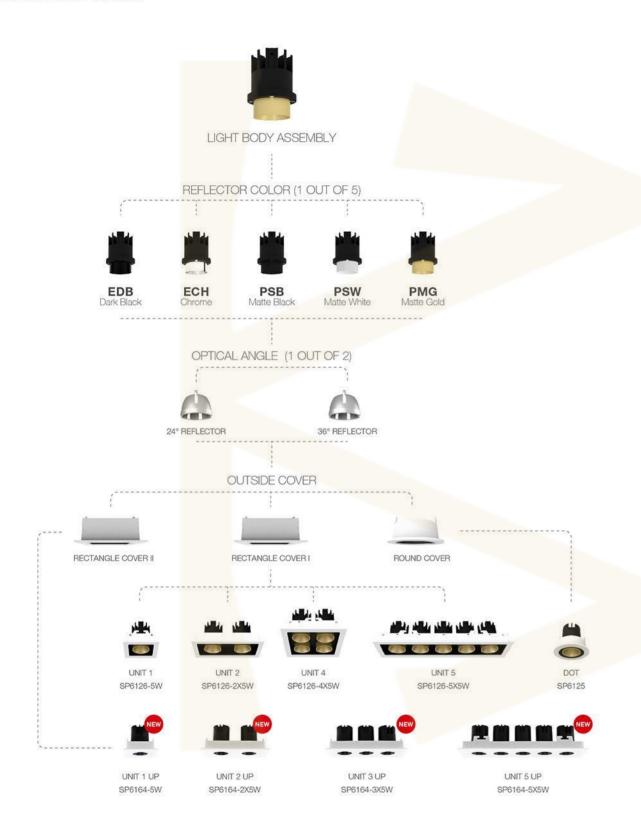



1 UP





63

128

SP6164-5W

UNIT 1 UP

CRI:>90 SYSTEM POWER:5W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:63*63*56mm HOLE SIZE:58*58mm



ON/OFF
OPTIONS:
3000K

4000K ____ 5000K


4000

6000K ANGLE:



UNIT 2 UP

CRI:>90 SYSTEM POWER:2X5W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:128*63*56mm HOLE SIZE:120*55mm






3 UP



5 UP



SP6164-3X5W

UNIT 3 UP

CRI:>90 SYSTEM POWER:3X5W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:158*63*56mm HOLE SIZE:152*55mm

RECOMMEND:





OPTIONS: 3000K

4000K 5000K

6000K ANGLE:



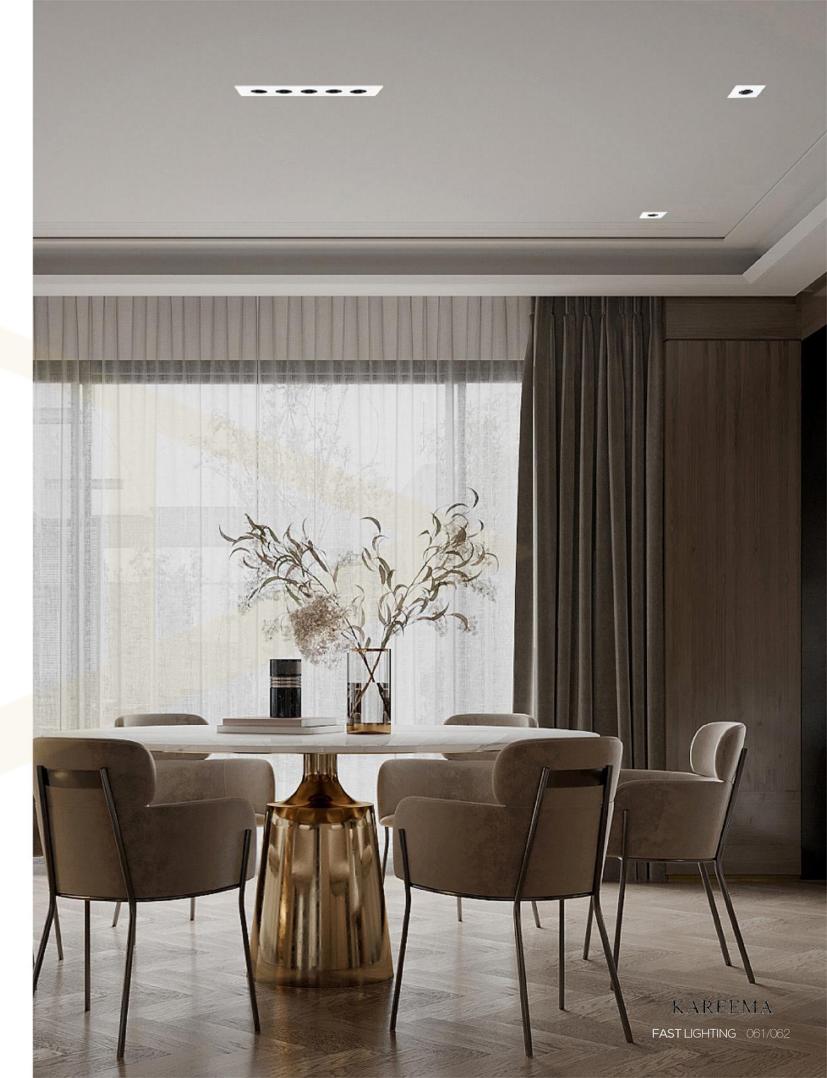

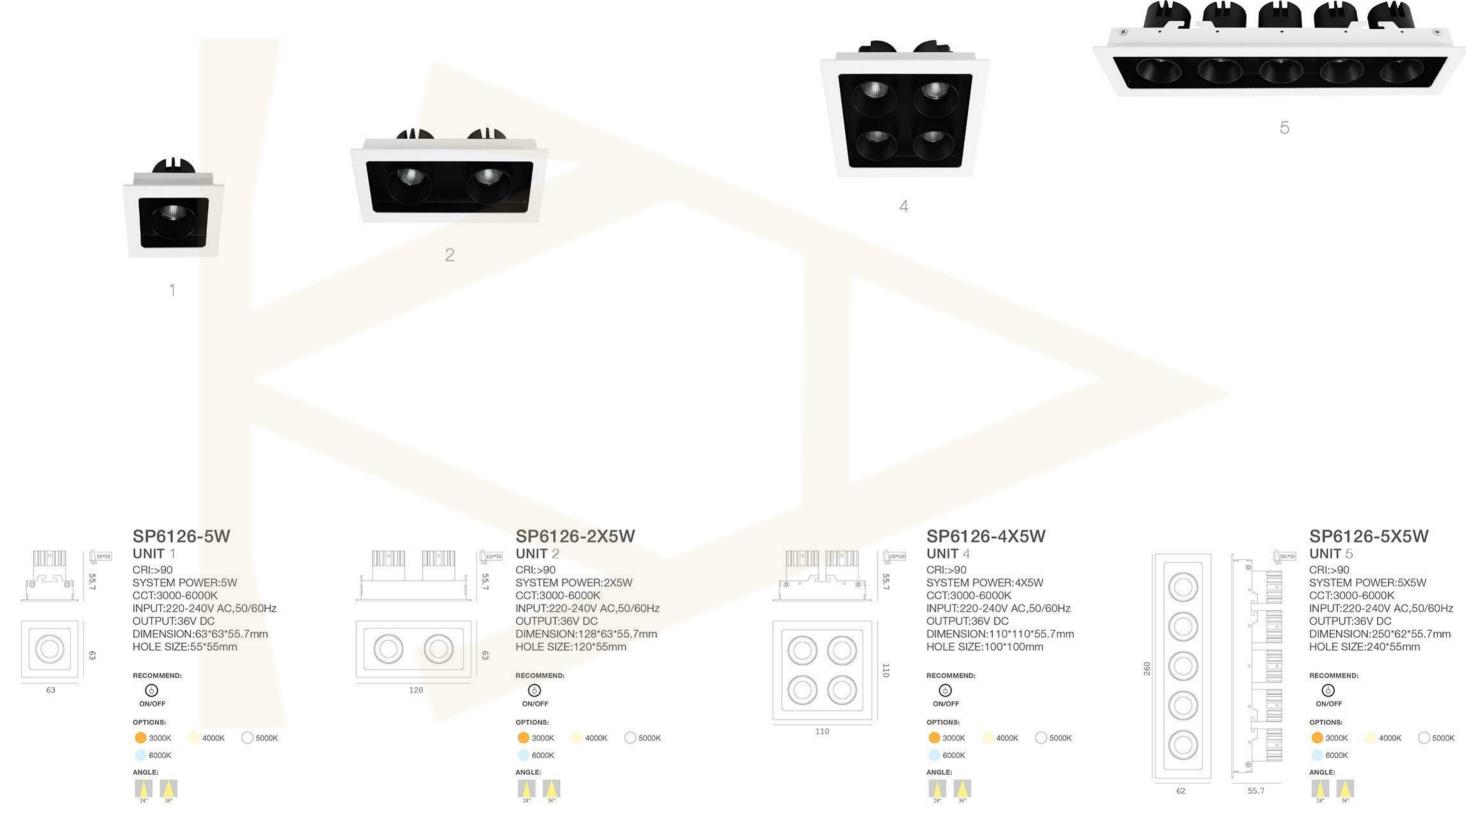









PACO

Paco series combines the minimalist appearance design with the strictly selected color scheme to create an excellent lighting environment for the space. There are two basic angles of 25 ° and 38 °, and there are few clean spots and side lights. The high-quality aluminum lamp body is suitable for a variety of light application scenarios.

IP20 | ⊕ DC | @ | (€ | § | RoHS





BODY COLOR:

















INNER RING COLOR:





KAREEMA FAST LIGHTING 067/068



RO SINGLE



RO DOUBLE



SQ DOUBLE

SQ SINGLE



SP6119-7W PACO RO SINGLE

CRI:>90 SYSTEM POWER:7W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:Ø91*86mm HOLE SIZE:Ø85mm


ON/OFF DALI 1-10V TRIAC
OPTIONS:

3000K 4000K 5000K

6000K

ANGLE:

25* 38*



SP6120-7W PACO RO DOUBLE

CRI:>90 SYSTEM POWER:14W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:168*90*86mm HOLE SIZE:160*85mm






SP6121-7W PACO SQ SINGLE

CRI:>90 SYSTEM POWER:7W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:3V DC DIMENSION:91*91*86mm HOLE SIZE:85*85mm





SP6122-7W PACO SQ DOUBLE

CRI:>90 SYSTEM POWER:14W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:177*91*86mm HOLE SIZE:170*85mm









S



M











Deep anti-glare design

BODY COLOR:





COLOR:







KAREEMA FAST LIGHTING 073/074



SP19B-7W

AMPHIS

CRI:80/90 SYSTEM POWER:7W CCT:3000-6500K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:Ø68*70mm HOLE SIZE:Ø60mm







SP19B-18W

AMPHI ∟

CRI:80/90 SYSTEM POWER:18W CCT:3000-6500K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:Ø95*92mm HOLE SIZE:Ø85mm





SP19B-12W

AMPHI M

CRI:80/90 SYSTEM POWER:12W CCT:3000-6500K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:Ø85*75mm HOLE SIZE:Ø75mm





SP19B-30W


AMPHI XL

CRI:80/90 SYSTEM POWER:30W CCT:3000-6500K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:Ø120*105mm HOLE SIZE:Ø110mm







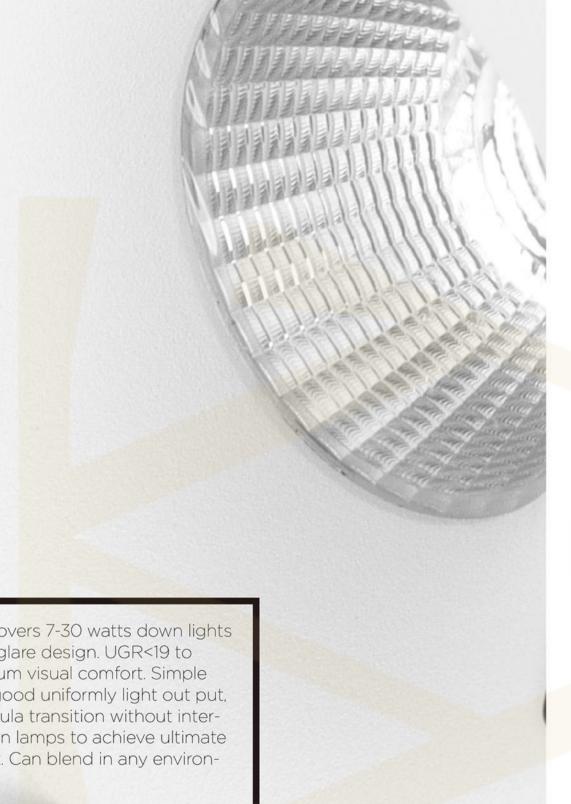

Amphi Series covers 7-30 watts down lights with deep anti glare design. UGR<19 to achieve maximum visual comfort. Simple design offer a good uniformly light out put, natural light facula transition without interference between lamps to achieve ultimate anti glare effect. Can blend in any environment properly.

CURVE



BODY COLOR:






COLOR:





KAREEMA FAST LIGHTING 079/080

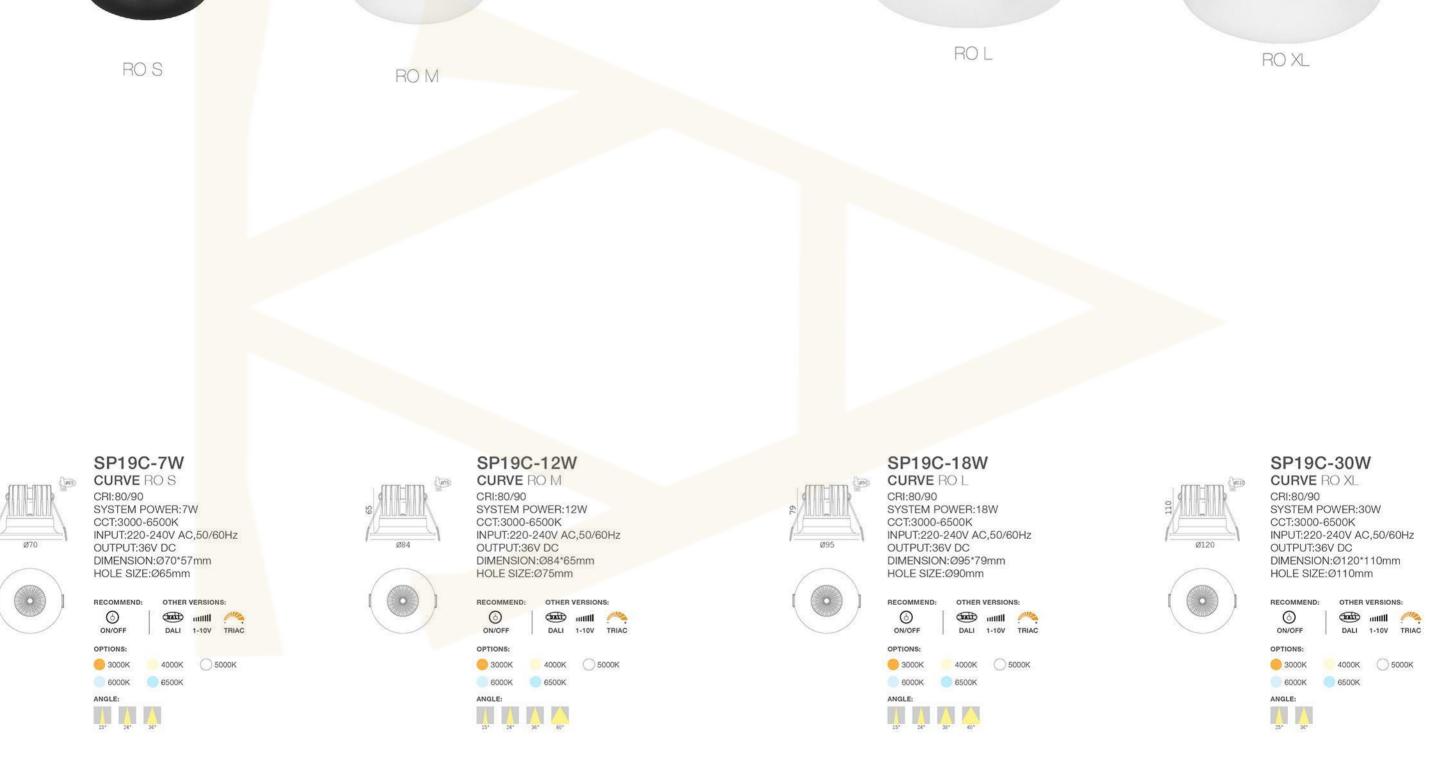



Surface mounted downlight





PATON

PATON series is very versatile with its compact and beautiful appearance. It is suitable for both general lighting and accent lighting. The design of the series and the wide selection of optical angles allow designers to create a distinctive atmosphere and feel. PATON is suitable for a variety of spaces, depending on the aesthetic requirements of the space.

IP20 | ⊕DC | @ | (€ | § | RoHS

BODY COLOR:







KAREEMA
FAST LIGHTING 087/088








SQ



SF6319-12W PATON RO

CRI:90 SYSTEM POWER:12W

SYSTEM OUTPUT:503Lm/3000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:Ø60*65mm HOLE SIZE:/





SF6320-12W

PATON SQ

CRI:90 SYSTEM POWER:12W SYSTEM OUTPUT:503Lm/3000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:66*66*65mm HOLE SIZE:/









MITO

MITO series classic and fashion collision, its surface classic brushing process with retro old coloring techniques, so that the appearance of the original simple fashion more tasteful.MITO series is suitable for ambient lighting and accent lighting, and it is easy to create a high-end match for demanding space environments. Also has a variety of beam angles to meet different spaces, from home to commercial space and "hospitality" work environment.



MITO S
Beam angle
15°/24°/36

MITO M Beam angle 15°/24°/38°/45°/60°






MITO L Beam angle 15°/24°/38°/45°/60

Deep light 30° Anti-glare



COLOR:

Black+Glod

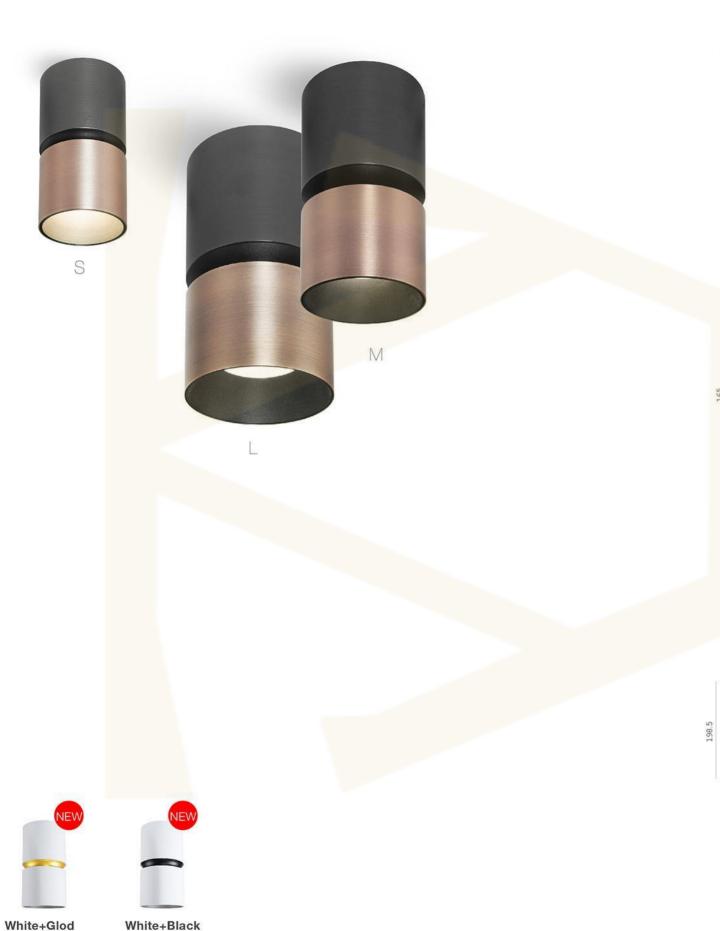

SF6318-7W MITO S



CRI:90 SYSTEM POWER:7W CCT:3000-6000K INPUT:220-240V AC,50/60Hz

OUTPUT:36V DC DIMENSION:Ø56*115mm HOLE SIZE:/



SF6318-15W





CRI:90 SYSTEM POWER:15W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION: Ø79.5*165mm HOLE SIZE:/



6000K

SF6318-20W MITO L



CRI:90 SYSTEM POWER:20W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION: Ø99.5*198.5mm HOLE SIZE:/



OTHER VERSIONS: (3) ON/OFF OPTIONS:


mill 🥍 DALI 1-10V TRIAC




3000K 4000K 5000K 6000K





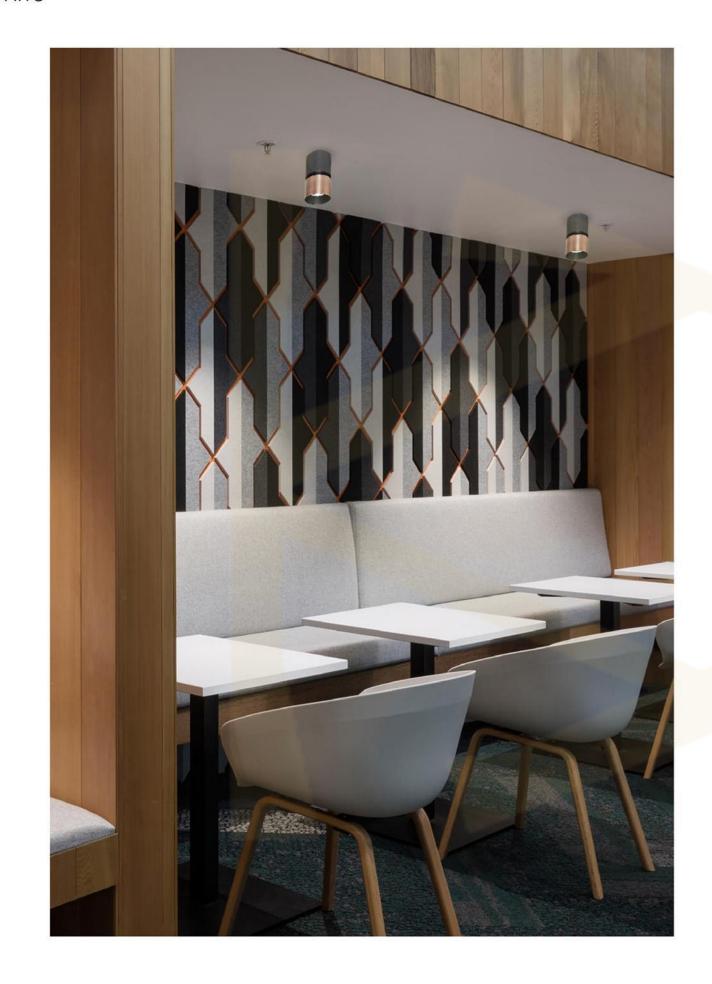

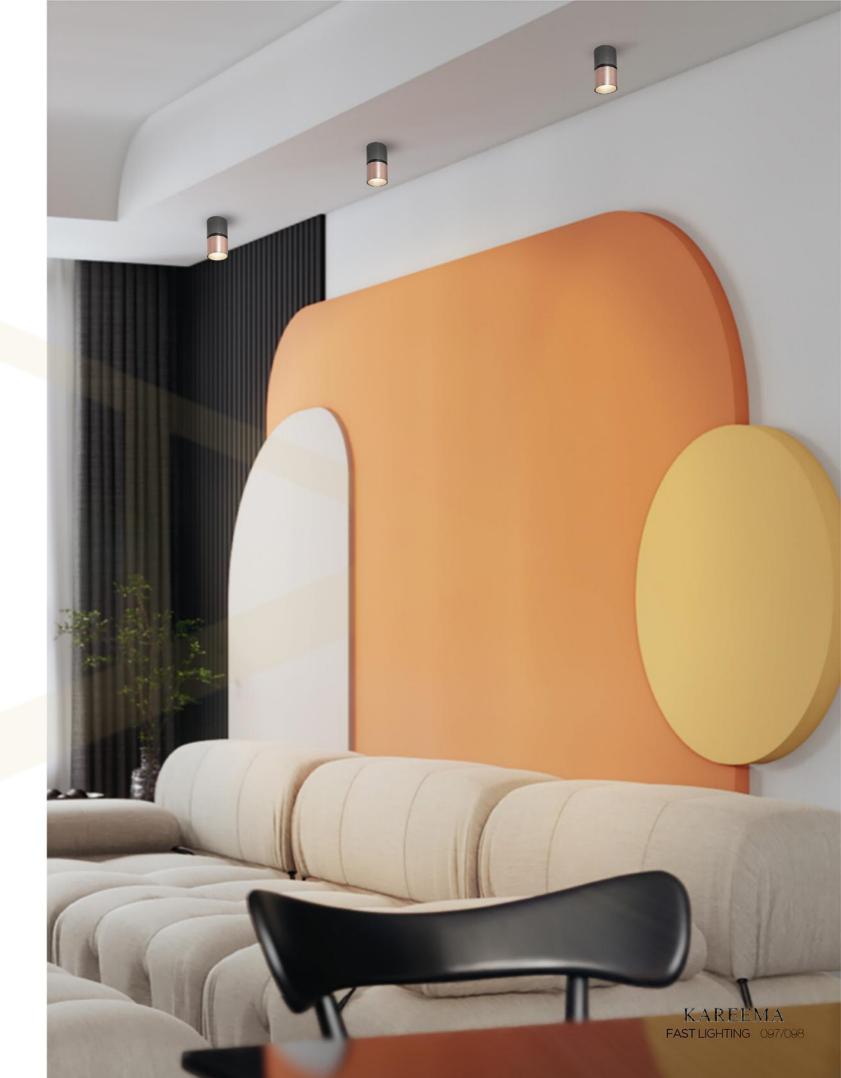

The PUPILLA series are as bright and energetic as the eyes, and the brightly divided lights bring extraordinary visual impact. Light body can be vertical 90 ° swing and horizontal 355 ° rotation, there are 15 °, 24 ° and 36 ° angle can be selected.

IP20 | ⊕DC | @ | (€ | 8 | RoHS

PUPILLA













Vertical 90° swing

Horizontal 355 ° rotation

COLOR:



PGW PG Sand Grain White San



PGW+SPG Sand Grain White



PGB Sand Grain Black



ECH



EDB Dark Black

KAREEMA

FAST LIGHTING 099/100







IN RO




TL RO



SF6308-12W **PUPILLA** RO

CRI:>90 SYSTEM POWER:12W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION: Ø76.5*83.5mm HOLE SIZE:/










SF6309-12W **PUPILLA** SQ

CRI:>90 SYSTEM POWER:12W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:76*76*88mm HOLE SIZE:/






TL6308-12W **PUPILLA** TL RO

CRI:>90 SYSTEM POWER:12W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:166*84mm HOLE SIZE:/






SP6308-12W **PUPILLA** IN RO CRI:>90

SYSTEM POWER:12W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:36V DC DIMENSION:Ø82*68.5mm HOLE SIZE:Ø75mm







(3)

ON/OFF

KAREEMA



MINI Spotlight



CLARION series, the 3-fold optical design hides the light source deeply, the honeycomb net filters the dazzling light, there is no visible direct light, and the light is soft and natural without dazzling. Excellent luminous efficiency, compact lamp body appearance, there are two styles of fixed and adjustable angle to choose first.








MN6709-3W CLARION FI

CRI:>80 SYSTEM POWER:3W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:3V DC DIMENSION:Ø40.5*53mm HOLE SIZE:Ø35mm



COLOR:



KAREEMA FAST LIGHTING 107/108





HUNTER


HUNTER series, small light body appearance, but like a hunter is fully equipped with a retractable bracket can be freely adjusted. 355° rotating light body can maximize the light position, precise light is the biggest advantage of HUNTER series, just like a hunting rifle as accurate, there are 12°, 25°, 40° beam angle can be selected. It can be used in combination, or as accent or spot lighting.











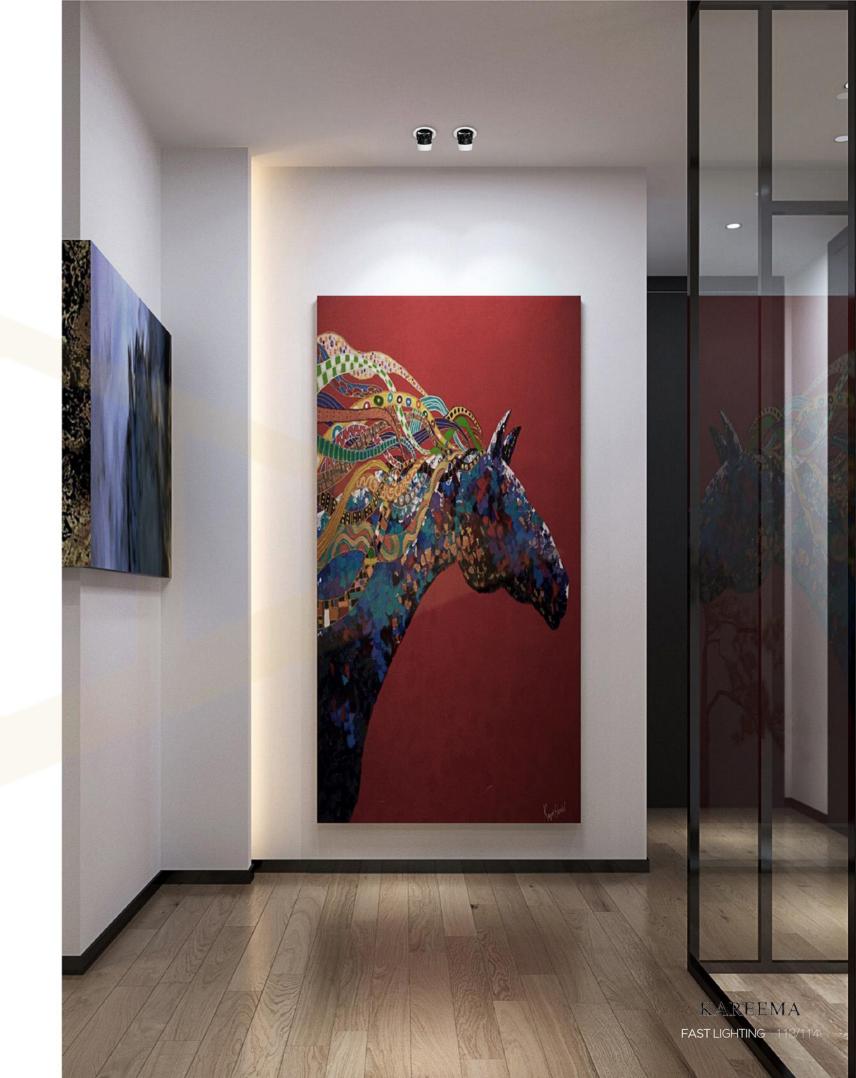

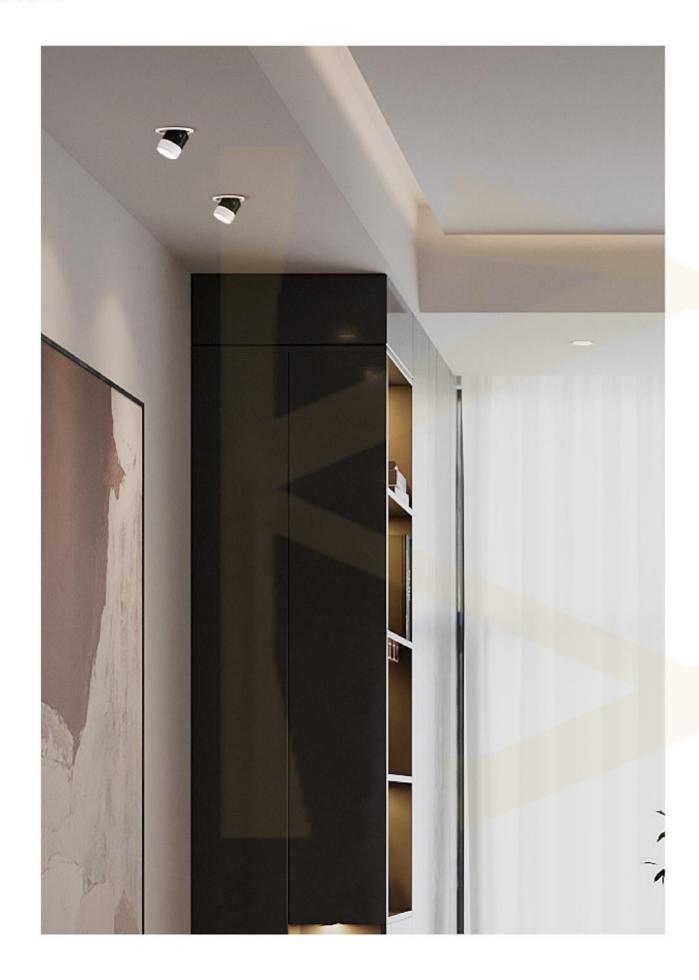



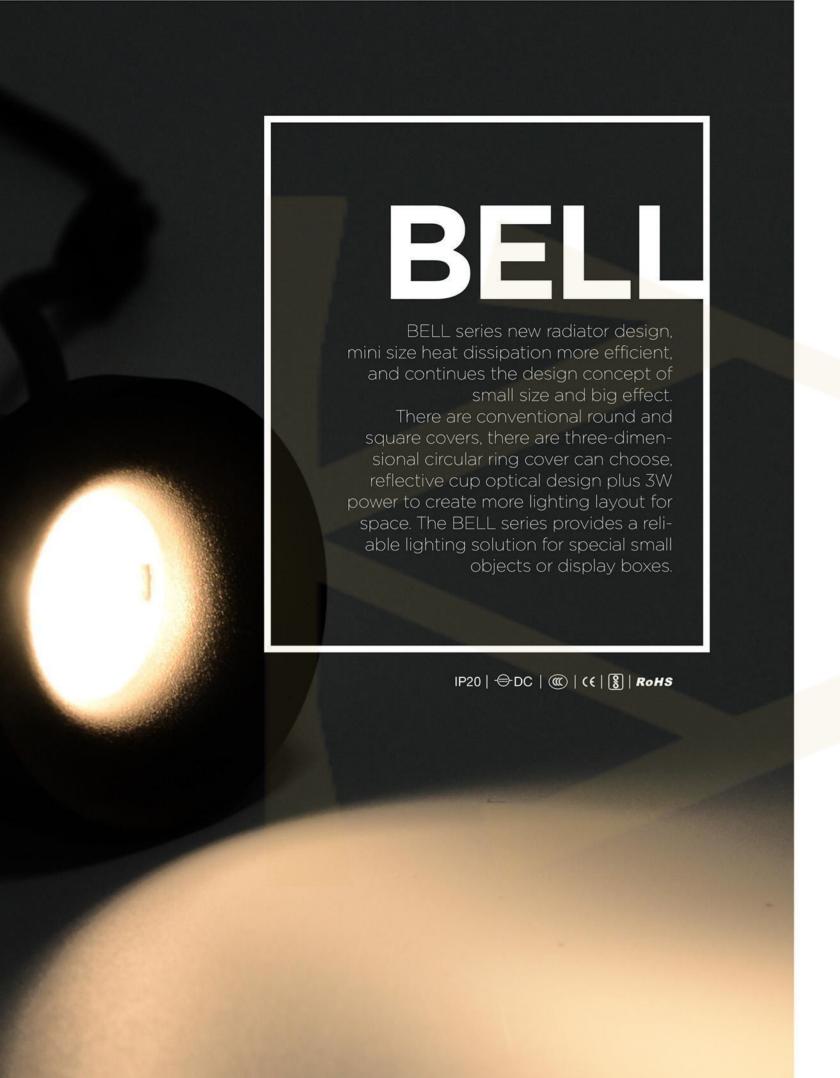



RO



RO COLUMN



SQ

COLOR:





KAREEMA
FAST LIGHTING 117/118





MN6706-3W

BELL RO COLUMN

CRI:>80 SYSTEM POWER:3W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:3V DC DIMENSION:Ø40.5*37mm HOLE SIZE:Ø35mm




MN6707A-3W

E CO

BELL RO
CRI:>80
SYSTEM POWER:3W
CCT:3000-6000K
INPUT:220-240V AC,50/60Hz
OUTPUT:3V DC
DIMENSION:Ø45*27mm
HOLE SIZE:Ø35mm



MN6707B-3W




BELL SQ CRI:>80 SYSTEM POWER:3W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:3V DC DIMENSION:45*45*27mm HOLE SIZE:Ø35mm






Wall lights

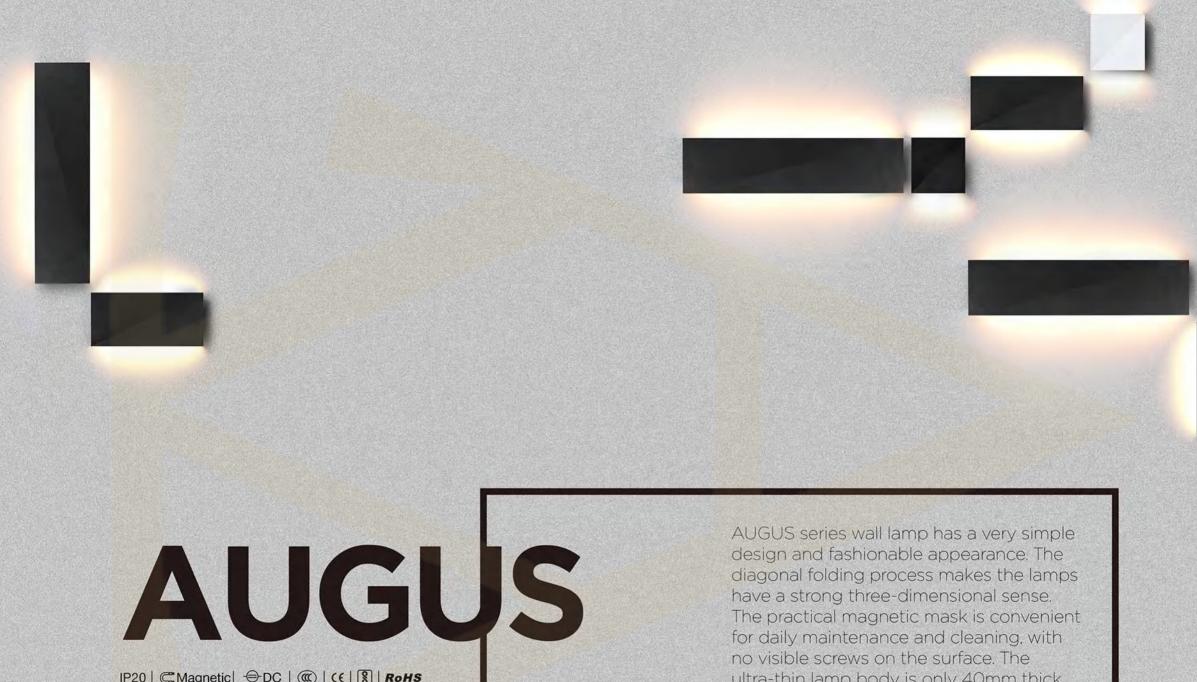

ultra-thin lamp body is only 40mm thick, and the AUGUS series provides three sizes that can be combined to create a very personalized lighting effect.





KAREEMA

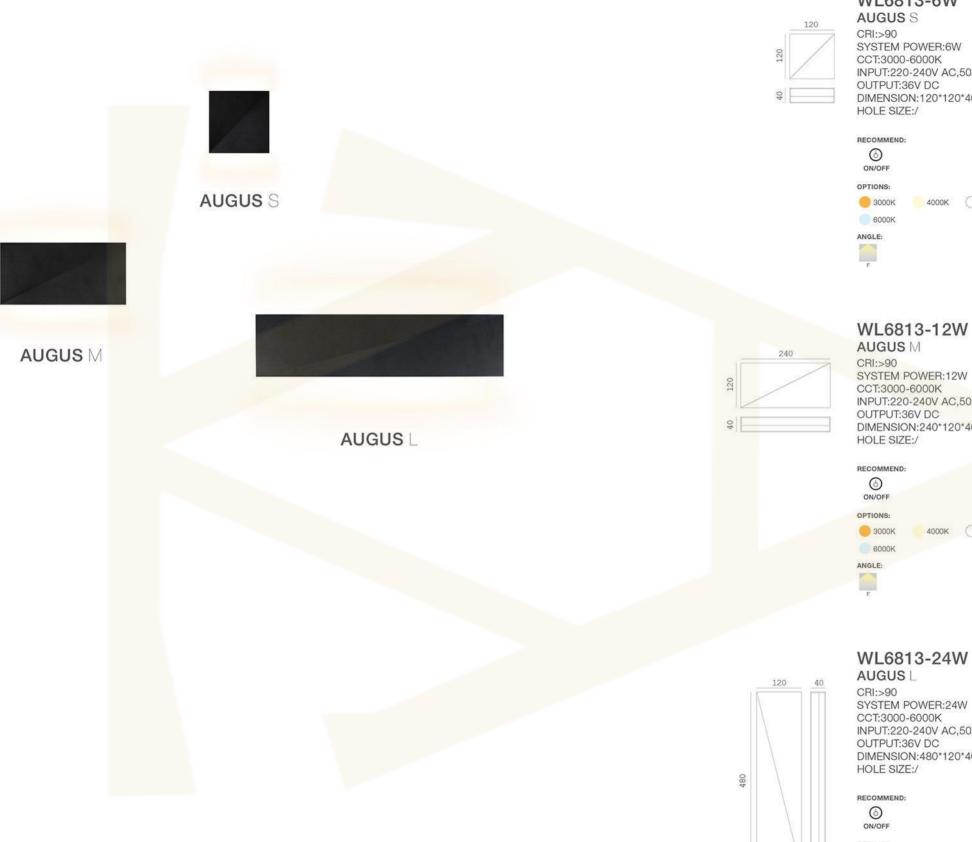

WL6813-6W SYSTEM POWER:6W CCT:3000-6000K INPUT:220-240V AC,50/60Hz DIMENSION:120*120*40mm














VERA series is a creative wall lamp composed of multiple irregular geometric sections. What's interesting is that VERA series is not limited to one direction of installation. You can design your favorite shape matching according to your own creativity, which is very personalized. The magnetic absorption panel can easily check the internal condition of the lamp for easy maintenance.

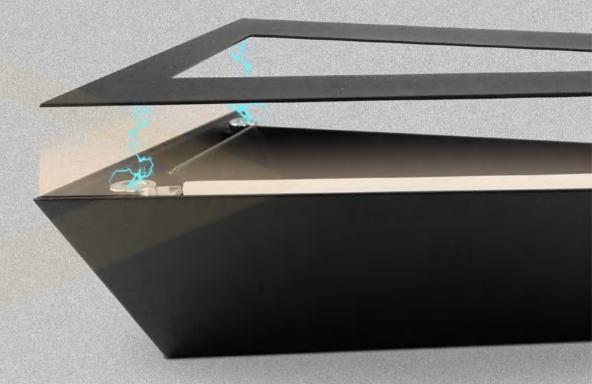



MAGNETIC SUCTION SIDE PLATE

Such magnetic suction side plate design makes routine maintenance or replacement of parts easier.





KAREEMA

FAST LIGHTING 129/130






KAREEMA

FAST LIGHTING 131/132

VISSA VISSA series, a variety of face cover can be selected, polarized light, side light, ambient light a variety of types, suitable for stores, home environment use in many occasions, fashionable and simple appearance, small body size, the full range of cut hole size only Ø35mm. IP20 | ⊕DC | ((() | ((| § | RoHS

Polarized Light







Side Glow(Focus)

RO LI2

WL6810L

SQ LI2







Semi Blackout Style















COLOR:





FAST LIGHTING 133/134



WL6810B-3W VISSA RO OV

CRI:>90 SYSTEM POWER:3W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:3V DC DIMENSION:Ø42*23mm HOLE SIZE:Ø35mm

RECOMMEND: (3) ON/OFF OPTIONS: 3000K 4000K ○ 5000K 6000K ANGLE:



WL6810C-3W VISSA SQ OV


CRI:>90 SYSTEM POWER:3W CCT:3000-6000K INPUT:220-240V AC.50/60Hz OUTPUT:3V DC DIMENSION:45*45*23mm HOLE SIZE:Ø35mm





WL6810K-3W **VISSA** RO HALF

CRI:>90 SYSTEM POWER:3W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:3V DC DIMENSION:Ø45*26.5mm HOLE SIZE:Ø35mm








WL6810D-3W VISSA RORI

CRI:>90 SYSTEM POWER:3W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:3V DC DIMENSION: Ø42*23mm HOLE SIZE:Ø35mm





WL6810E-3W VISSA SQ RI

CRI:>90 SYSTEM POWER:3W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:3V DC DIMENSION: 45*45*23mm HOLE SIZE:Ø35mm





WL6810L-3W VISSA RO LI2

WL6810H-3W

SYSTEM POWER:3W

INPUT:220-240V AC,50/60Hz

4000K 5000K

DIMENSION:Ø45*26.5mm

VISSA ROCI

CCT:3000-6000K

OUTPUT:3V DC

HOLE SIZE:Ø35mm

CRI:>90

RECOMMEND:

0

ON/OFF

OPTIONS:

3000K

6000K

ANGLE:

CRI:>90 SYSTEM POWER:3W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:3V DC DIMENSION: Ø45*28mm HOLE SIZE:Ø35mm





WL6810N-3W VISSA SQ LI2

CRI:>90 SYSTEM POWER:3W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:3V DC DIMENSION:45*45*28mm HOLE SIZE:Ø35mm








WL6810F-3W **VISSA** RO RE

CRI:>90 SYSTEM POWER:3W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:3V DC DIMENSION:Ø42*23mm HOLE SIZE:Ø35mm






WL6810G-3W VISSA RO RE

CRI:>90 SYSTEM POWER:3W CCT:3000-6000K INPUT:220-240V AC,50/60Hz OUTPUT:3V DC DIMENSION:45*45*23mm HOLE SIZE:Ø35mm






KAREEMA



LEAD series is a multi-purpose, ultra-thin floor lamp series, suitable for outdoor and bathroom. LEAD has a strong sense of creativity. You can rotate and array to create your own patterns and effects. LEAD is equipped with frosted acrylic lens, providing clear light projection, illuminating the ground, stairs and corridor walls.

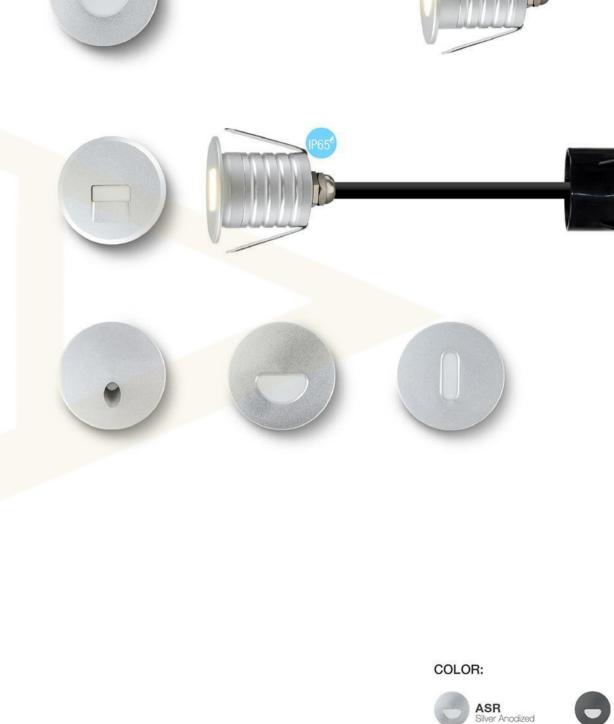





LEAD



WL6815A-3W LEAD OV

LED:CRI 80 OPTIC:3000K / F POWER:3W INPUT:220-240V AC,50/60Hz OUTPUT:12V 200mA DIMENSION:Ø38*35mm HOLE SIZE:Ø30mm





WL6815D-3W

LEAD RE

LED:CRI 80 OPTIC:3000K / F POWER:3W INPUT:220-240V AC,50/60Hz OUTPUT:12V 200mA DIMENSION:Ø38*35mm HOLE SIZE:Ø30mm





WL6815B-3W LEAD L

LED:CRI 80 OPTIC:3000K / F POWER:3W INPUT:220-240V AC,50/60Hz OUTPUT:12V 200mA DIMENSION:Ø38*35mm HOLE SIZE:Ø30mm






WL6815E-3W

LEAD HALF

LED:CRI 80 OPTIC:3000K / F POWER:3W INPUT:220-240V AC,50/60Hz OUTPUT:12V 200mA DIMENSION:Ø38*35mm HOLE SIZE:Ø30mm





WL6815C-3W

LEAD RO


LED:CRI 80 OPTIC:3000K / F POWER:3W INPUT:220-240V AC,50/60Hz OUTPUT:12V 200mA DIMENSION:Ø38*35mm HOLE SIZE:Ø30mm






ACCESSORIES

Embedded parts Size:Ø74*74mm

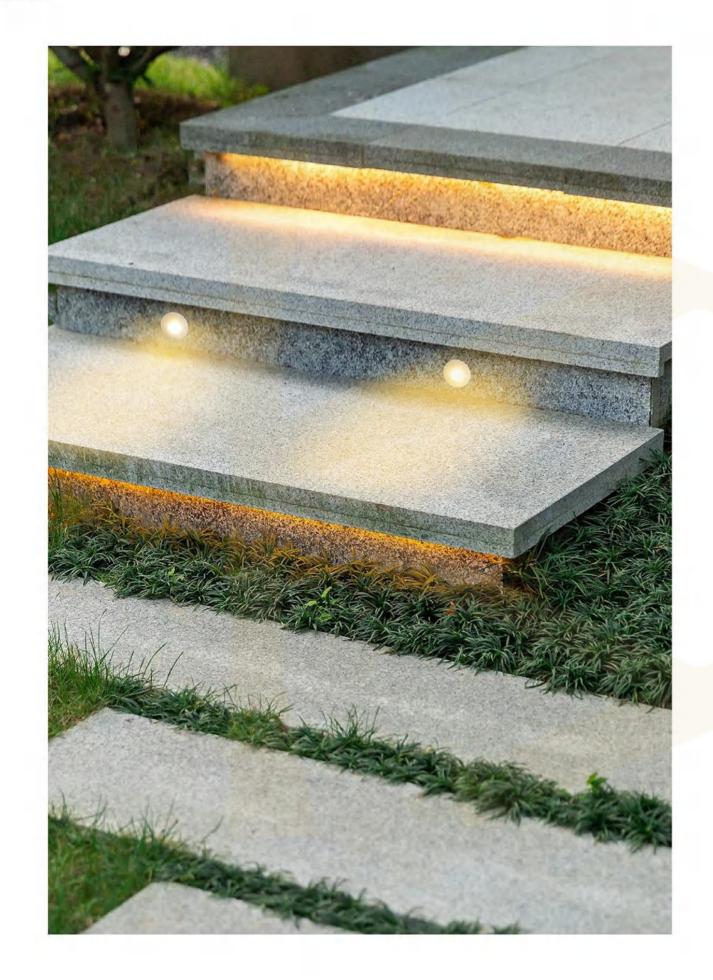

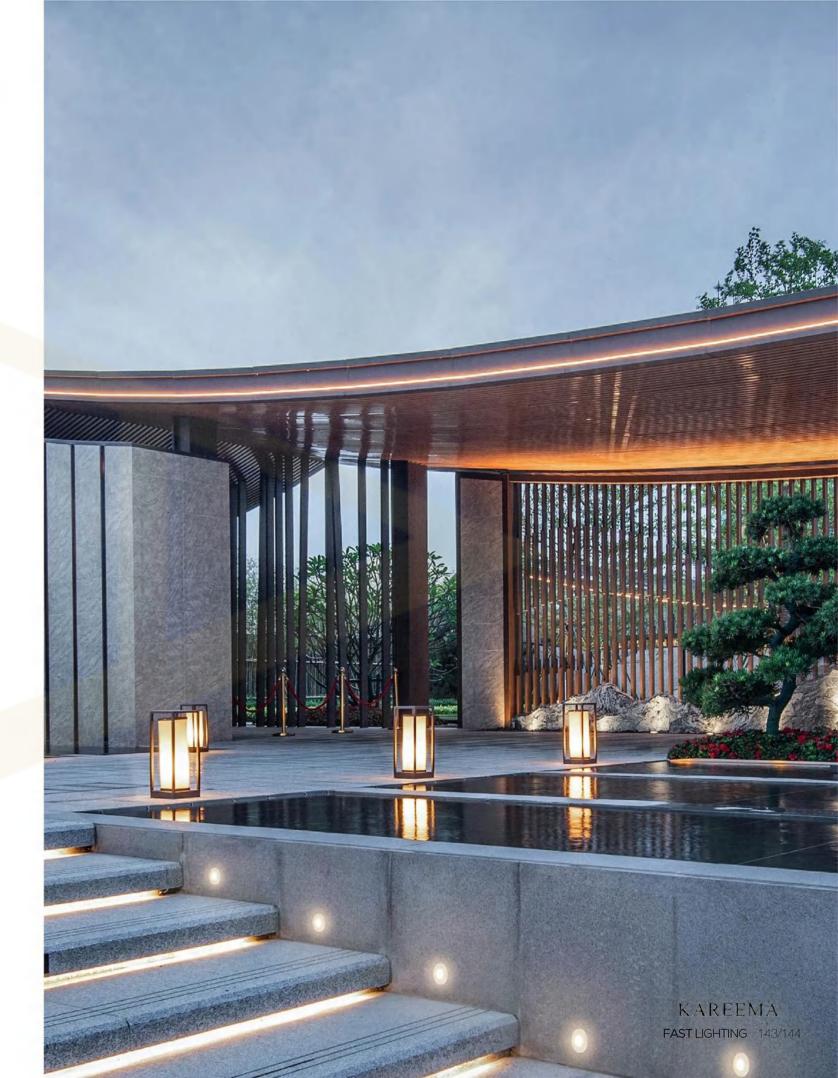









WL6816A-5W

AIM R1 A
LED:CRI 80
OPTIC:3000K / F
POWER:5W
INPUT:220-240V AC,50/60Hz
OUTPUT:12V 400mA
DIMENSION:Ø52*51mm
HOLE SIZE:Ø35mm





WL6816B-5W

AIM R1 B LED:CRI 80 OPTIC:3000K / F POWER:5W INPUT:220-240V AC,50/60Hz OUTPUT:12V 400mA DIMENSION:Ø52*51mm HOLE SIZE:Ø35mm





WL6816C-5W

AIM R2 B
LED:CRI 80
OPTIC:3000K / F
POWER:5W
INPUT:220-240V AC,50/60Hz
OUTPUT:12V 400mA
DIMENSION:Ø52*51mm
HOLE SIZE:Ø35mm





ACCESSORIES

Embedded parts Size:Ø80*85mm






WL6816D-5W

AIM R3

LED:CRI 80 OPTIC:3000K / F POWER:5W INPUT:220-240V AC,50/60Hz OUTPUT:12V 400mA DIMENSION:Ø52*51mm HOLE SIZE:Ø35mm





WL6816E-5W

AIM R5

LED:CRI 80 OPTIC:3000K / F POWER:5W INPUT:220-240V AC,50/60Hz OUTPUT:12V 400mA DIMENSION:Ø52*51mm HOLE SIZE:Ø35mm






WL6816F-5W

AIM HALF
LED:CRI 80
OPTIC:3000K / P
POWER:5W
INPUT:220-240V AC,50/60Hz
OUTPUT:12V 400mA
DIMENSION:Ø52*51mm
HOLE SIZE:Ø35mm







IP65 waterproof drive

FAST LIGHTING 147/148










Inspiration from myth, GENIE series. Three different exterior designs can be combined. GENIE series has the effect of main light source and ambient light at the same time, making light more interesting.


IP20 | ⊕DC | @ | (€ | 🕄 | RoHS






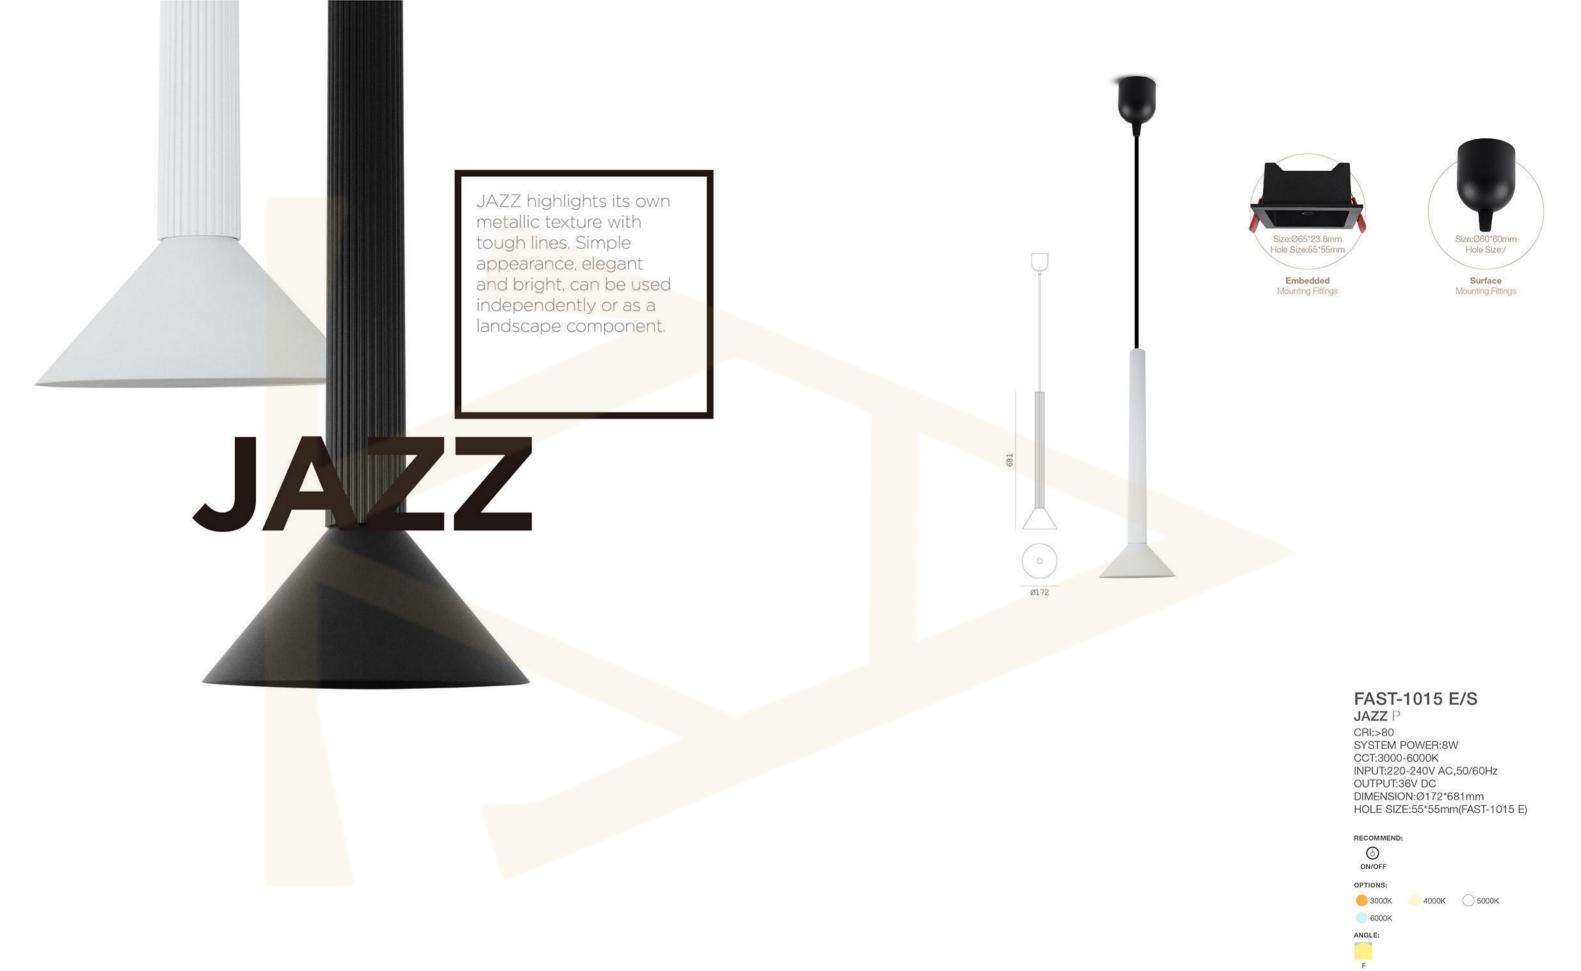




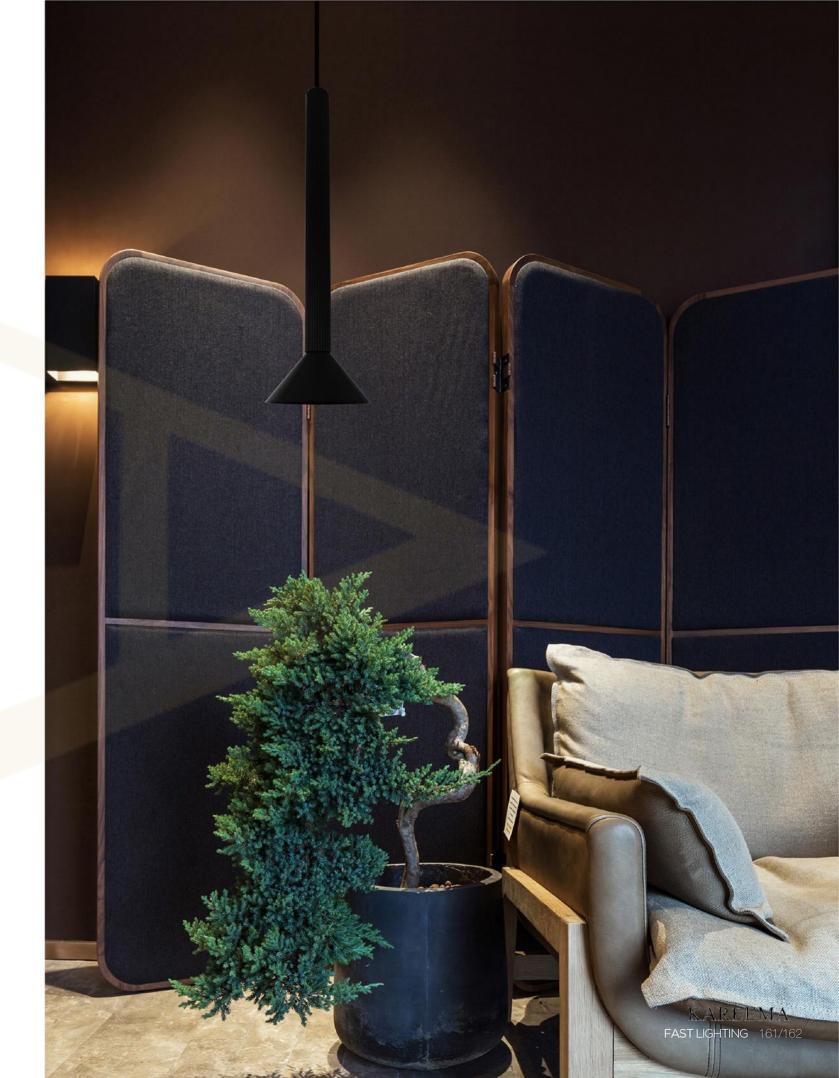



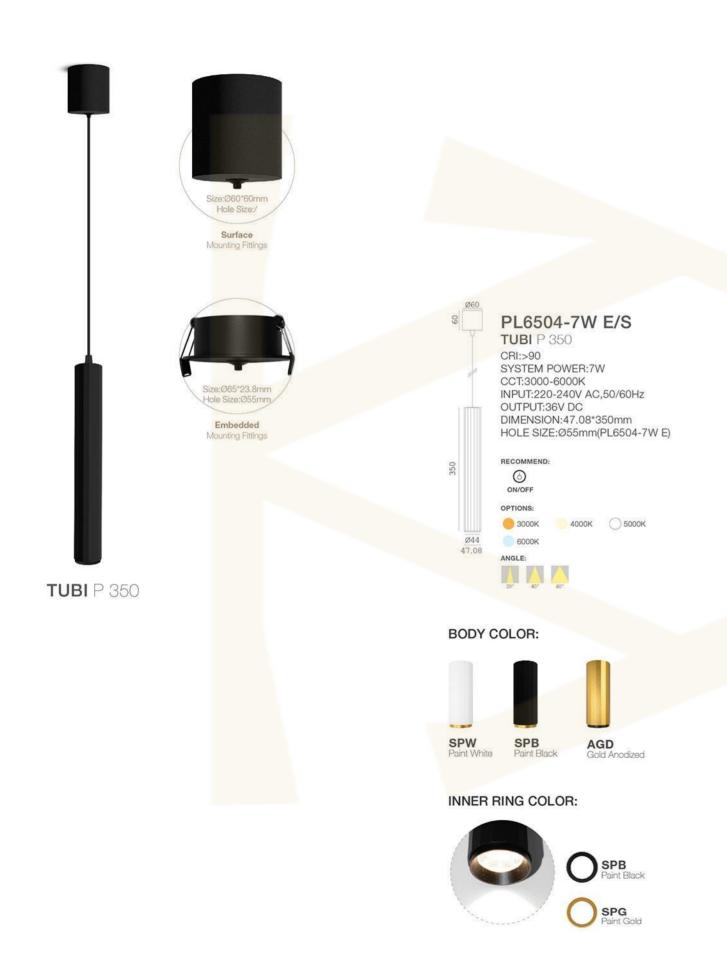

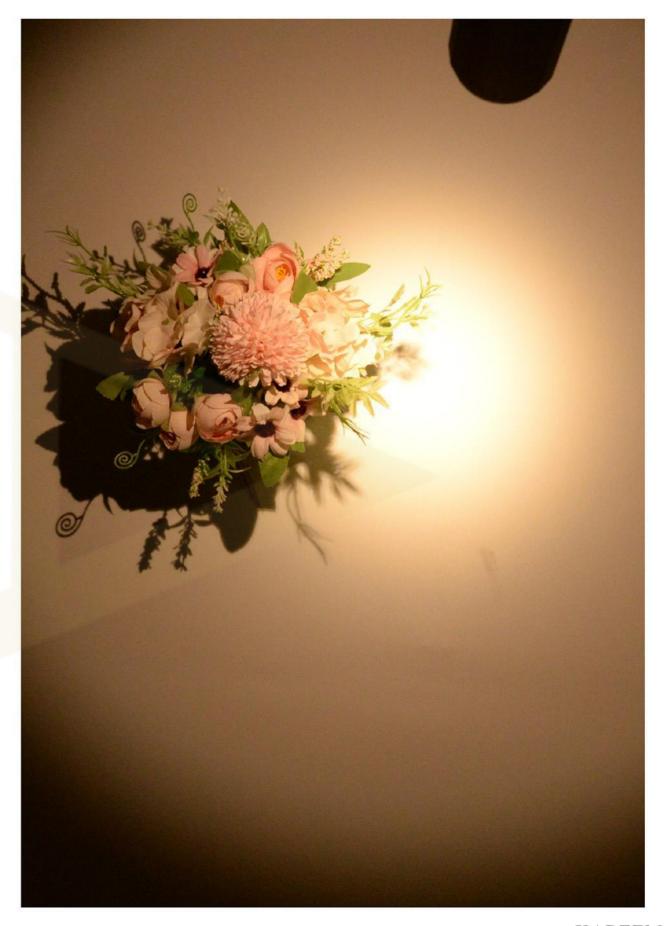

KAREEMA
FAST LIGHTING 165/166





COLOR:








KAREEMA
FAST LIGHTING 167/168



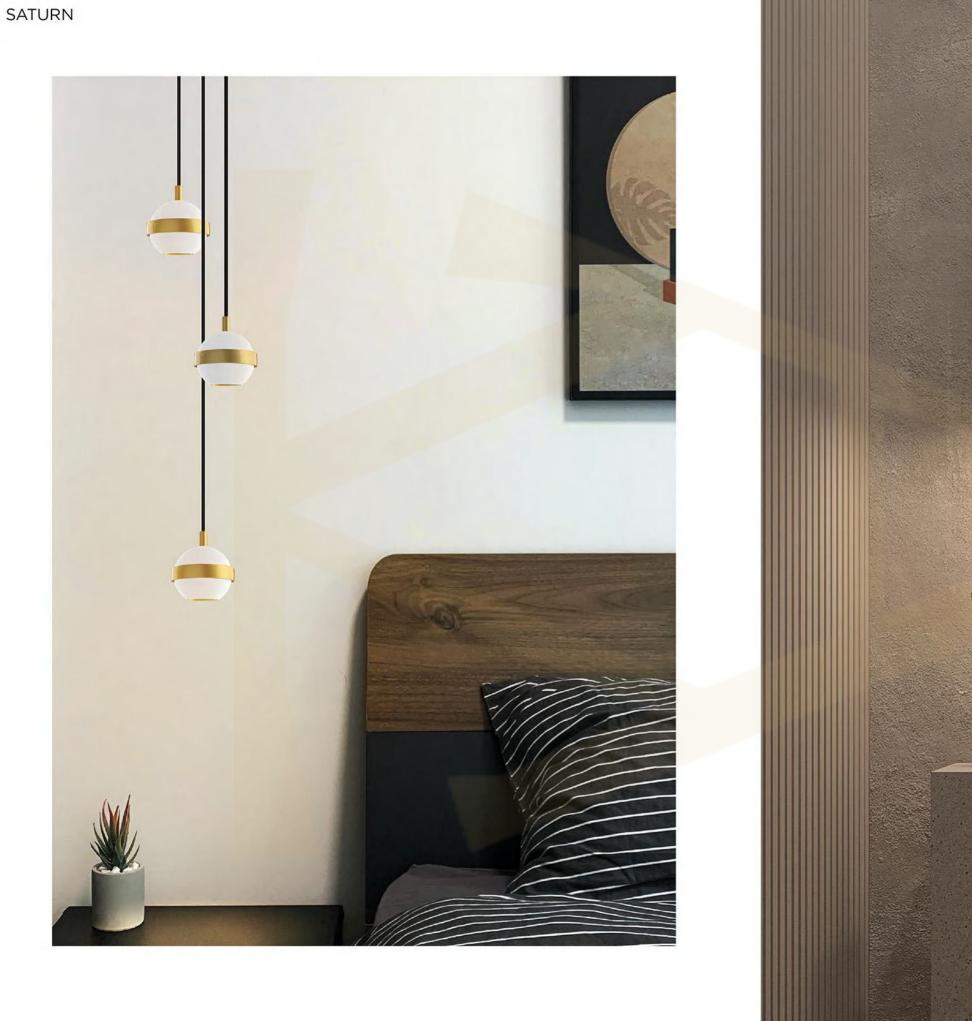



DIAMOND

DIAMOND is a new chandelier series. The concept of DIAMOND appearance is special and novel, and the space is unique. DIAMOND makes it possible to create unique patterns in the room, breaking up the space from wall to ceiling and visually enhancing the space.

IP20 | ⊕DC | @ | (€ | § | RoHS















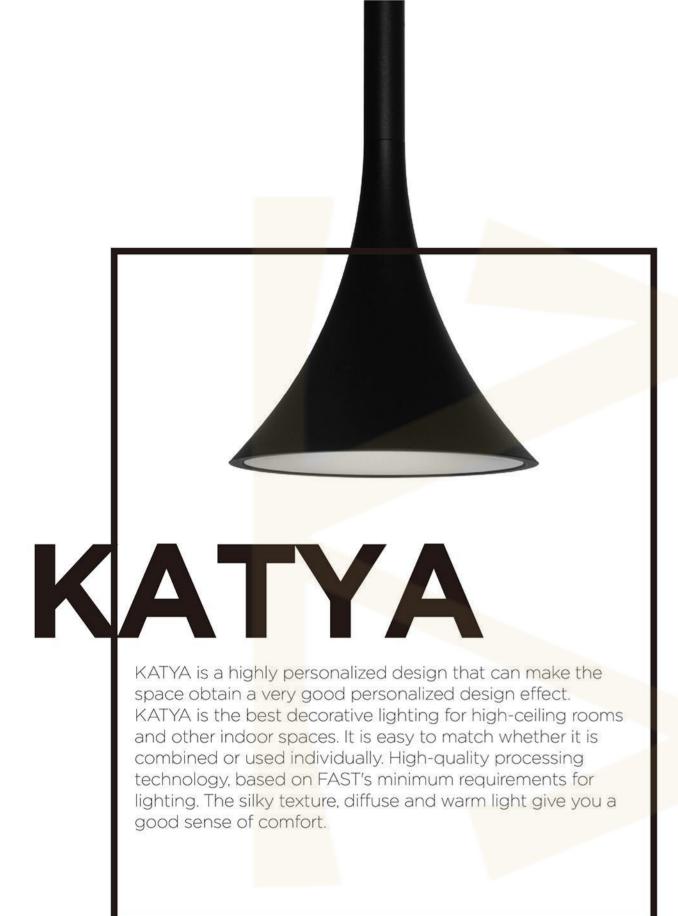

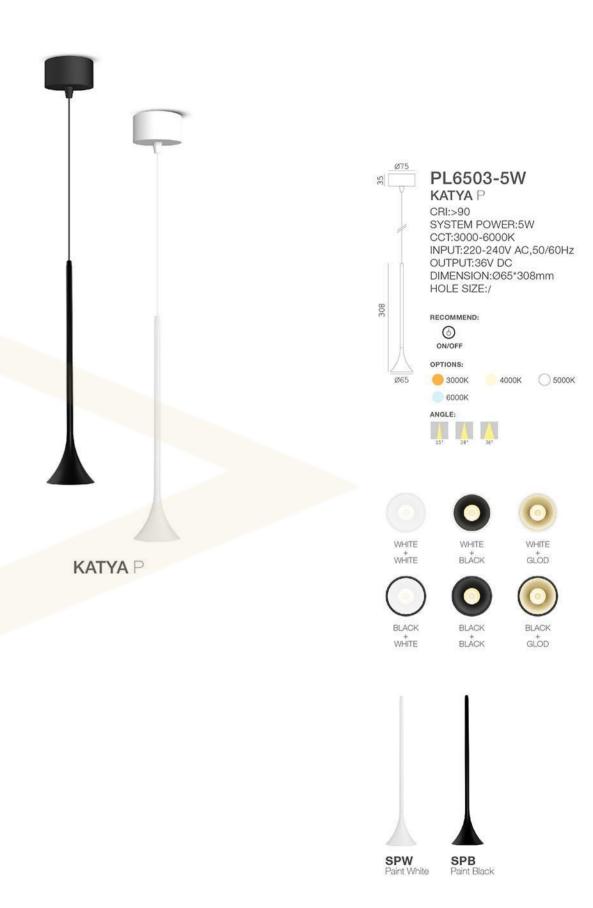



The fluidity of light

Design by Diez Office ____ PUSMINUS

Plusminus is a versatile lighting system that takes the concept of the light rail to a new level. The conductive textile ribbon at its core allows for free placement of the luminaires and the creation of unique light solutionson the spot.





Luminaire types and lighting effects



Sphere

distri direc relax of lig

360° Diffusion lighting distributes light equally in all directions (360°). It attracts a relaxed gaze towards the point of light, and creates a calm, very comfortable atmosphere. The light sphere bathes all surfaces of the space, producing a peaceful, richer and extremely homogenous ambience.



Semisphere



Directed diffusion lighting emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct

of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time



Cone



Directed diffusion lighting

emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.

Spotlight



Directed diffusion lighting emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. It is ideal for reading situations or when the light output is visible, as it does not produce glare.



Accent lighting
emphasizes objects or
architectural elements with
intensive cones of light.
Luminance contrasts attract the
eye and bring the illuminated
objects into the foreground.
The light output is directed
towards the object or architectural
element and not towards the
person, in order to avoid glare.



Linear Diffuser



General lighting

provides a high degree of uniformity on the horizontal plane and generates a first layer of illumination on which to add more specific lighting applications. It generates soft shadows and subdued brightness in which the space and its component elements do not display visual hierarchies.



Linear Low UGR



High-efficiency, low-glare general linear lighting

offers medium brightness and clarity of forms. Direct illumination, extended beam and luminaire performance enable installations with high-energy efficiencies and low-glare levels below UGR<19. High-comfort, low-glare general linear lighting

provides high levels of illumination and comfort with UGR levels below 19. It is also ideal for work or meeting areas.



KAREEMA


FAST LIGHTING 187/188



Easy connection Fix / Click / Connect

Each belt, which can be cut as needed, accommodates multiple luminaires and operates with simple plug-in technology for unparalleled ease of installation and connection. The belt offers adjustments in tension from taut to relaxed as well as click-and-connect functionality, snapping into a buckle attached to each luminaire.




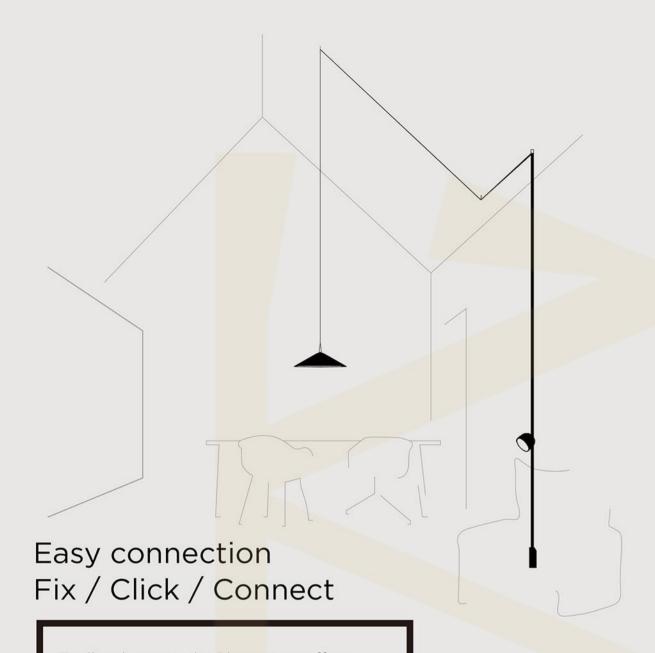


Endlessly versatile, Plusminus offers the freedom to combine different levels of diffuse and focused illumination as never before to create a unique atmosphere in any interior.

Design a space by drawing with the belt, conducting light to the right place while evoking an emotional response and sense of wellbeing.

Visual Hierarchy
Raining Light
Reimagining Spaces
Framing Space
Defying Gravity
Flowing Pendants
Creative Canopy Connection
Suspended Animation

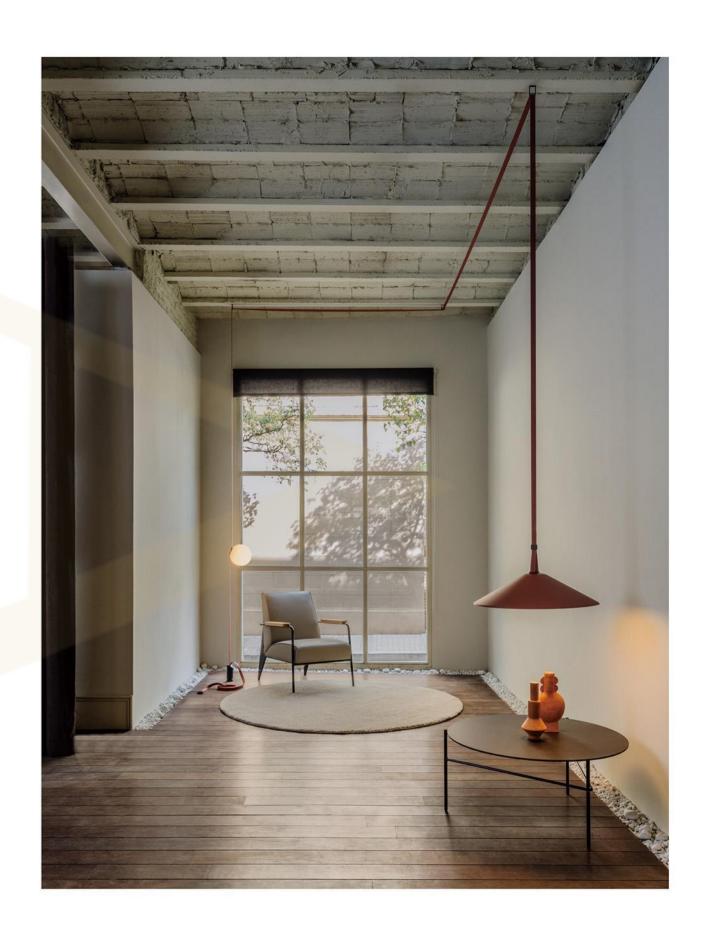

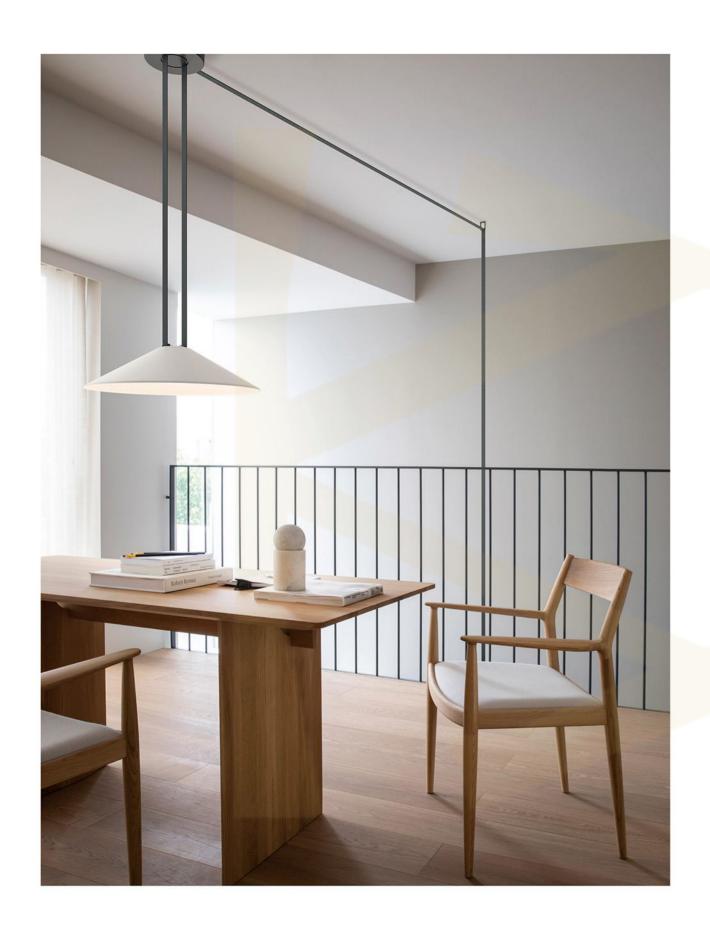






Place multiple lights in different positions throughout a space with just a single electrical connection.



The fabric belt offers endless flexibility of use, conducting light across a range of ceiling shapes and angles.

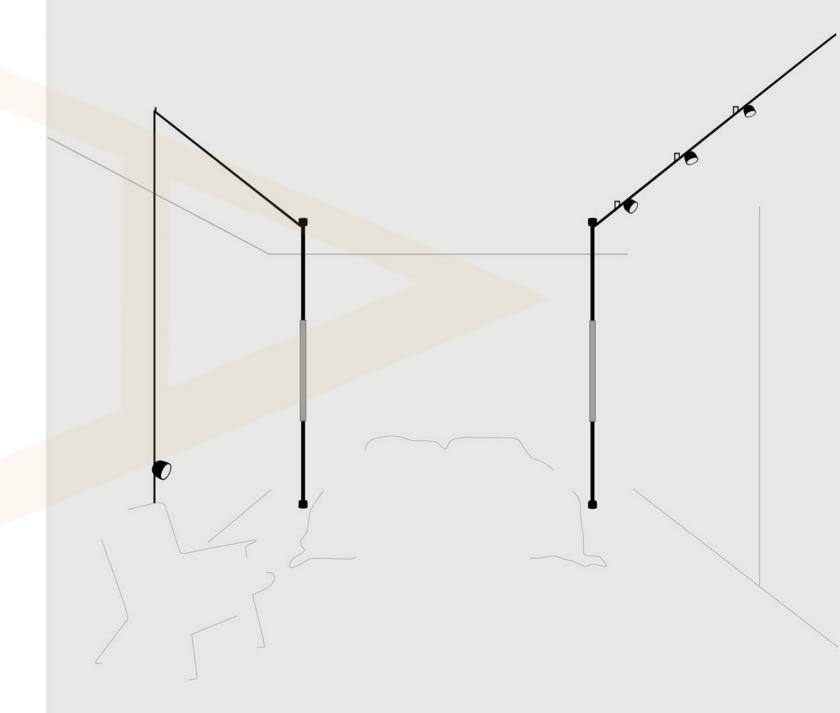

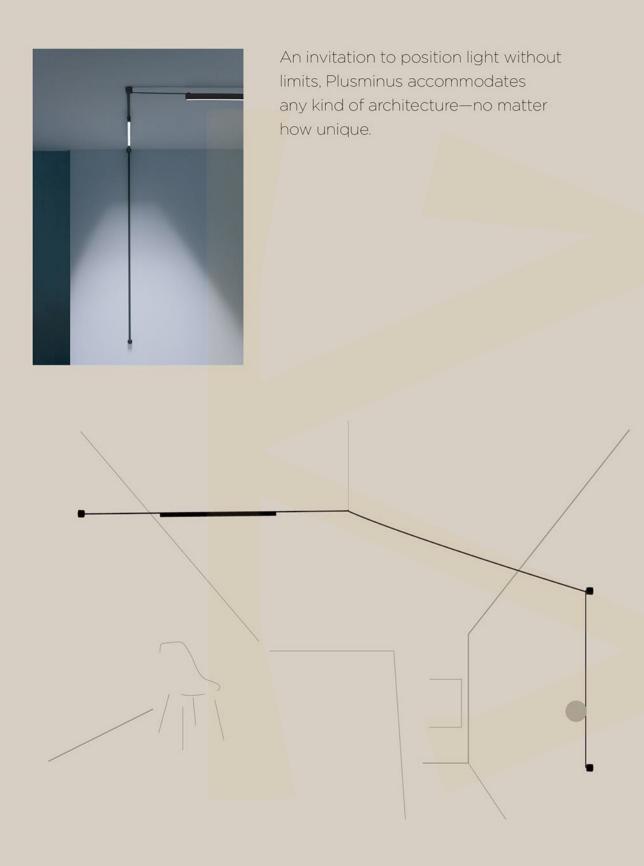

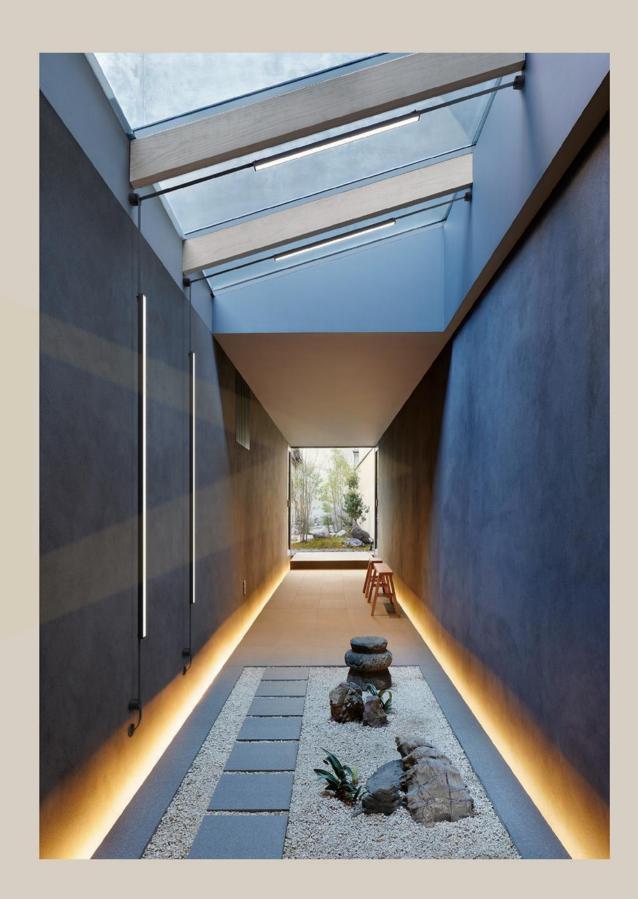

From a single spotlight positioned close at hand to a cascading installation of luminaires overhead, Plusminus's ceiling-to-floor possibilities create a stunning display of light in varying intensity and effect.

Raining Light



Plusminus's powerful design capabilities include constructing columns of light up to 30 meters high.











Merging light and materiality,
Plusminus introduces masterful new
ways to delineate space. Tracing a
slender outline, the fabric belt creates
a contained area within an open
layout, serving as an illuminated
perimeter with minimal presence.



Reimagining Social Spaces

Plusminus designs facilitate use of communal spaces, encouraging effortless interaction and movement.









Framing Space

Plusminus's lean lines define an interior with precise transverse trajectories. Stretching from wall to wall, the belt evokes the effect of a false ceiling, reducing a room's volume and bringing light closer. With kinetic crisscrossed and zigzagged configurations or soothing straight lines, the luminaires appear integrated into the architecture.

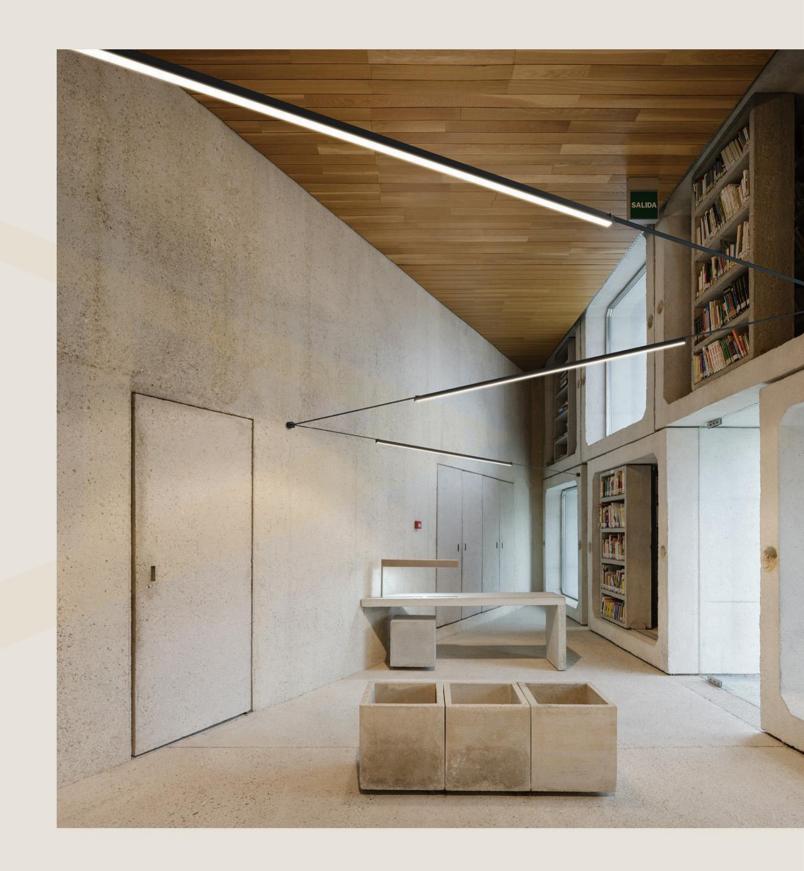


Plusminus's nearly invisible tensor wire introduces an element of intrigue to lighting. Lifting or lowering the belt, the cable creates varying degrees of tension that enables infinite configurations.

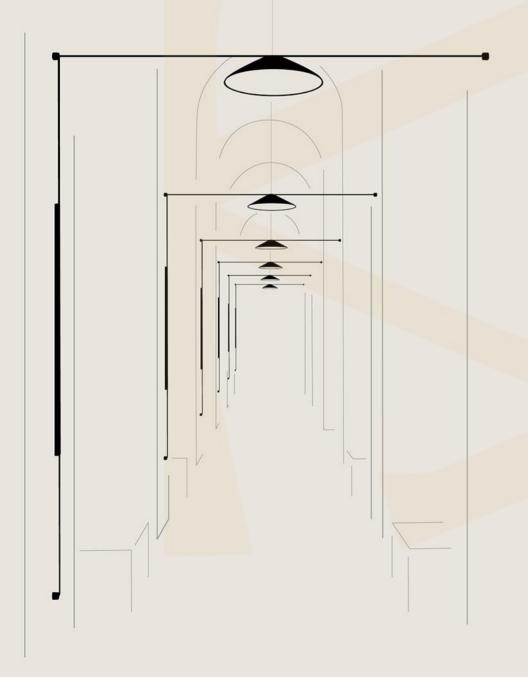



Composing Light

Both object of beauty and high-performance lighting toolkit, Plusminus offers personalised atmospheres while doubling as striking visual sculpture.

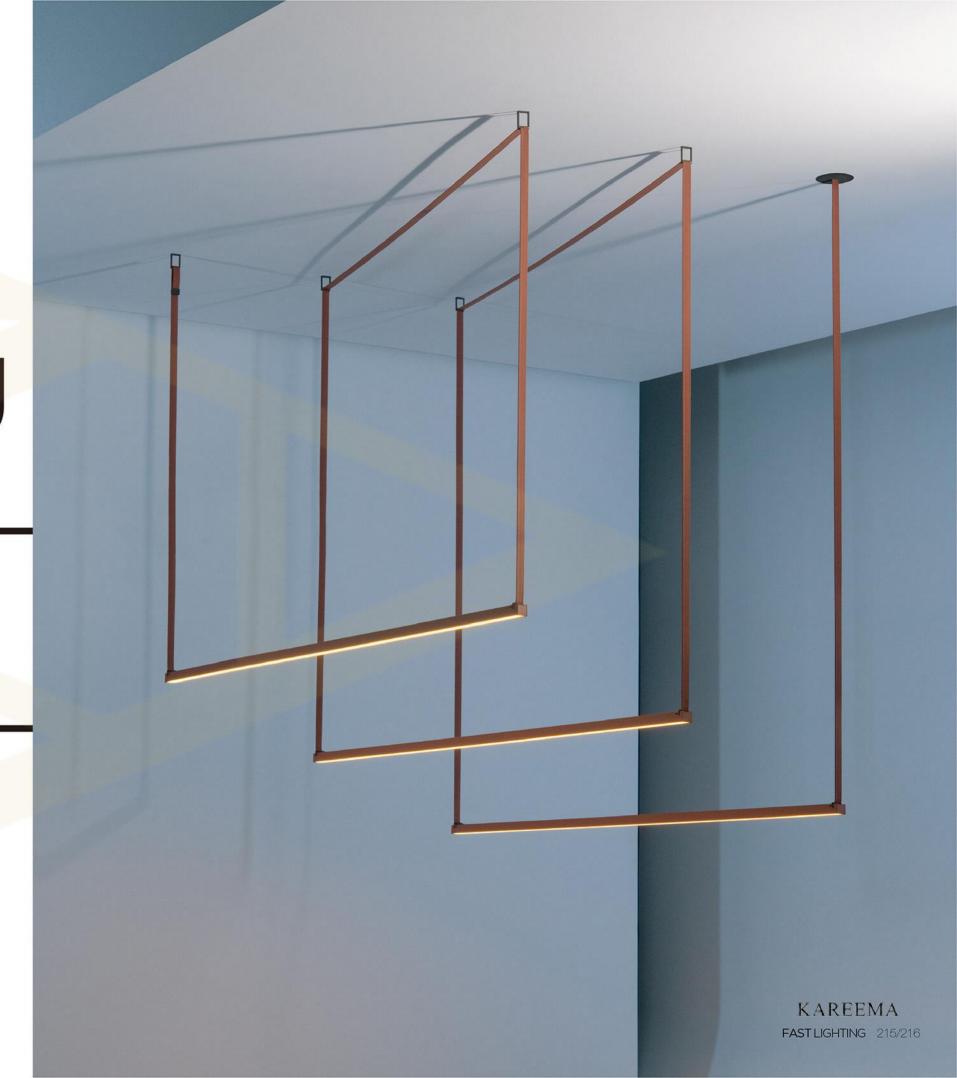





Composing Light

Both object of beauty and high-performance lighting toolkit, Plusminus offers personalised atmospheres while doubling as striking




Play with height and length to suit any setting and affix personalised belt designs for a one-of-a-kind look.



Sloped angles, wood or metal beams, and heating or cooling installations pose no problem for Plusminus. A sleek bar affixed to the ceiling provides an architectural platform for the belt, which wraps around it in a range of draped designs.



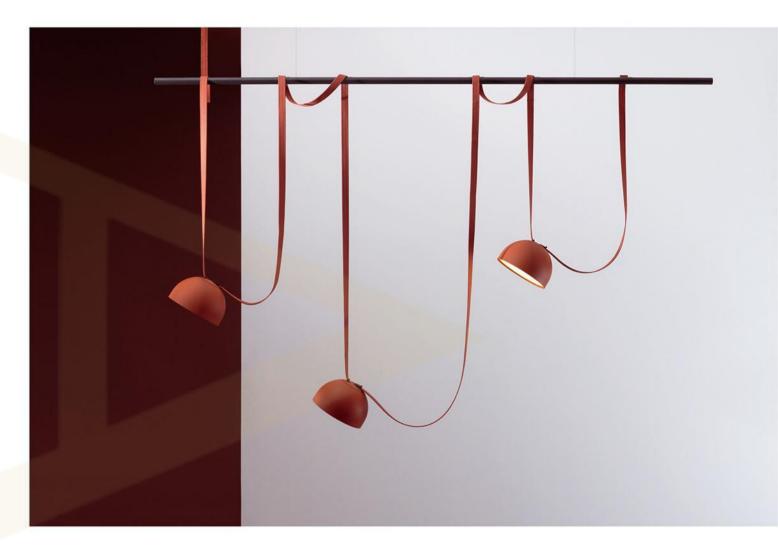

Detailed product information



Luminaires types

11 Black (NCS S 8500-N)24 Beige M1 (NCS S 2005-Y50R)37 Terra Red (NCS S 4040-Y70R)

42 Blue M1 (NCS S 5010-B10G)53 Green M1 (NCS S 6005-G80Y)

LED 2700 K / 3000 K / 3500 K. CRI>90

Dimming options:
On/ Off.
Simultaneous line DALI, 1-10V, Push, Casambi.
Casambi integrated on each individual luminaire (P2P).





ø 80 cm

Spotlight Accent lighting: 6200 (12°), 6205 (24°), 6210 (55°). Directed diffusion lighting: 6215. Linear Diffuser 6250 £ | | | | | | | | 3 cm 102 cm 6255 \$ 1 **G** Linear Low UGR High Comfort 6260 6265 6270 Linear Low UGR High Efficiency 6280 6285 6275

3 cm


52,5 cm

103,7cm

Sphere



Semisphere

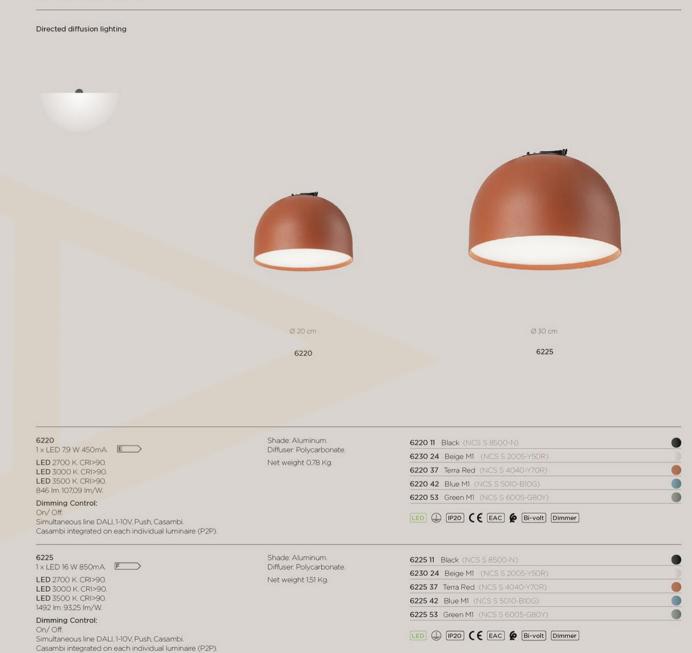



Cone





Linear diffuser



Linear Low UGR



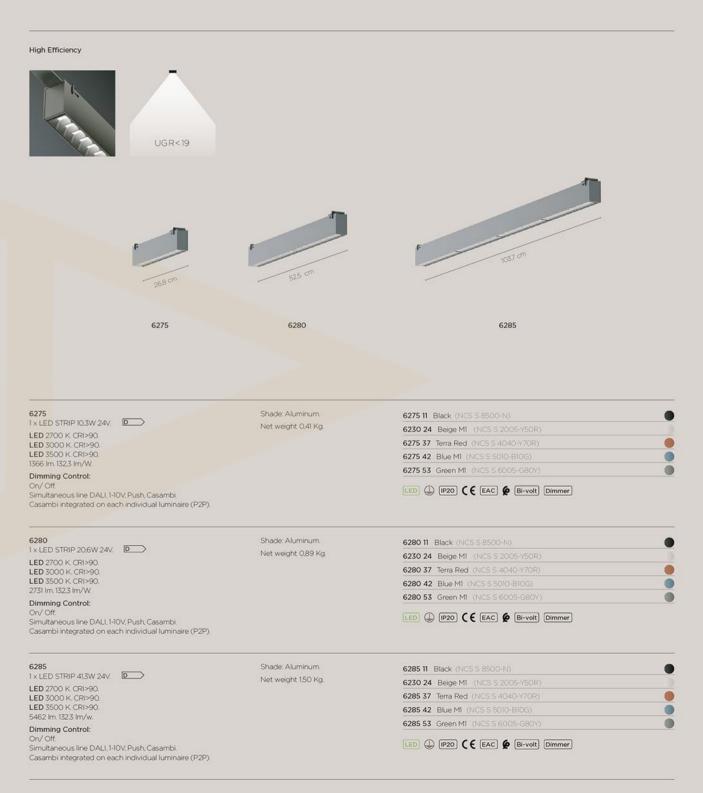



FAST LIGHTING 235/236

Spotlight









6215

1 × LED 42 W 250mA

LED 2700 K CRI>90.


LED 3500 K CRI>90.

491 Im. 116.9 Im/W.

Dimming Control:

On/ Off.

Simultaneous line DALL 1-10V, Push, Casambi.

Shade: Aluminum. Diffuser: Polycarbonate. Net weight 0.51 Kg. 

Electrical Connection options

Choose your preferred installation option according to your needs.



Dimming Control options

Dimming Control	Electrical Connection			
	Surface	Built-in	Remote	Plug
	25 - 240 W	25 - 240 W	25 - 240 W	Max 60W
On/Off	✓ <u> </u>	✓	~	~
Push Switch		=		~
Push Simultaneous	✓	~	~	:
1-10V Simultaneous	~	~	~	-
DALI Simultaneous	✓	~	~	-
Casambi Simultaneous	V	~	✓	-
Casambi integrated on each individual luminaire (P2P)	~	~	✓	~

Belt terminations

Belt terminations can be adjusted during the installation process according to your preference.



This directory is specially designed for you who are ready. From the beginning of the project to the final completion of all requirements, we will do our best to help you create the most ideal light space. We hope you can create in an absolutely free way.

The contents of this catalog can be changed or cancelled at the discretion of Rephon management without notice.

Due to the continuous upgrading or improvement of product technology, the parameters in the catalog may be different from the actual products. For more product inquiries, please contact us.

We have learned that many perfect projects are inseparable from the coordination of various links, and the importance of light is an indispensable link. In many cases, the personality of the design cannot be expressed without light. Interestingly, I believe that future products must be unique and intelligent, so refined products become important. I talk to some architects and designers and find that they have a lot of new ideas and creativity which makes me excited. I believe that diversified products allow them to create freely and without fear.

Our story continues. New things, new projects will bring us new ideas, new opportunities and new lighting solutions.





Tel: +971 56811168 / +971 544771239

Email: info@beitalkareema.com

Add: 5 17A St, Al Khabaisi, Dubai P.O.Box 10776