

NOTE: All colours shown in this brochure are as close to the actual product colours as modern technical printing process allows it is necessary to refer to the actual product colours



Kareema Ceiling



Tel: +971 56811168 / +971 544771239

Email: info@beitalkareema.com

Add: 5 17A St, Al Khabaisi, Dubai P.O.Box 10776

WHO WE ARE

Founded in 1997, Kareema Sennorwell ceramics and ceiling are manufactured with the latest technique and using the best materials. They express the ultimate in design elegance and are perfect for entryways, accent walls and special applications where the touch of elegance is desired.

We offer comprehensive product lines including Polished porcelain tile, Rustic tile, Wall tile, (including Coordinating wall & floor tile) Mosaic ceiling. Etc. With a wide selection of colours, patterns and finishes as well as an extensive line of coordinating accessories.

The annual manufacturing capacity of approximately 150 millions square feet makes us maximize production at its lowest cost. With the aim of lowering costs and continually developing new products, we never stop the pace of improvement and innovation and continue to invest in manufacturing technology.

We are also open for OEM orders.
We look forward to the establishing of co-operation with you!

What WE CAN DO FOR YOU

Cost Control

Goods are shipped directly from the quarry. Various solutions meet your project budget.

Quality Control

Excellent factory management, Advanced equipment, Professional QC team.

Guaranteed delivery

Abundant stock, Perfect production lines, Mighty logistic team.

Measurement

AutoCAD drawings, measurement, Job-site measurement.

Design

Professional design team supply you Architecture design, Landscaping design, Interior & Exterior Design and Product Design.

Technical Support

Job-site installation instruction and guide.

Index

1 PVC CEILING BOARD

01-12

2 GYPSUM BOARD


13-22

PVC PANEL

扣条印花系列>>>


WIDTH:20-25cm
THICKNISS:0.6/0.7/0.75cm

FOB FOSHAN

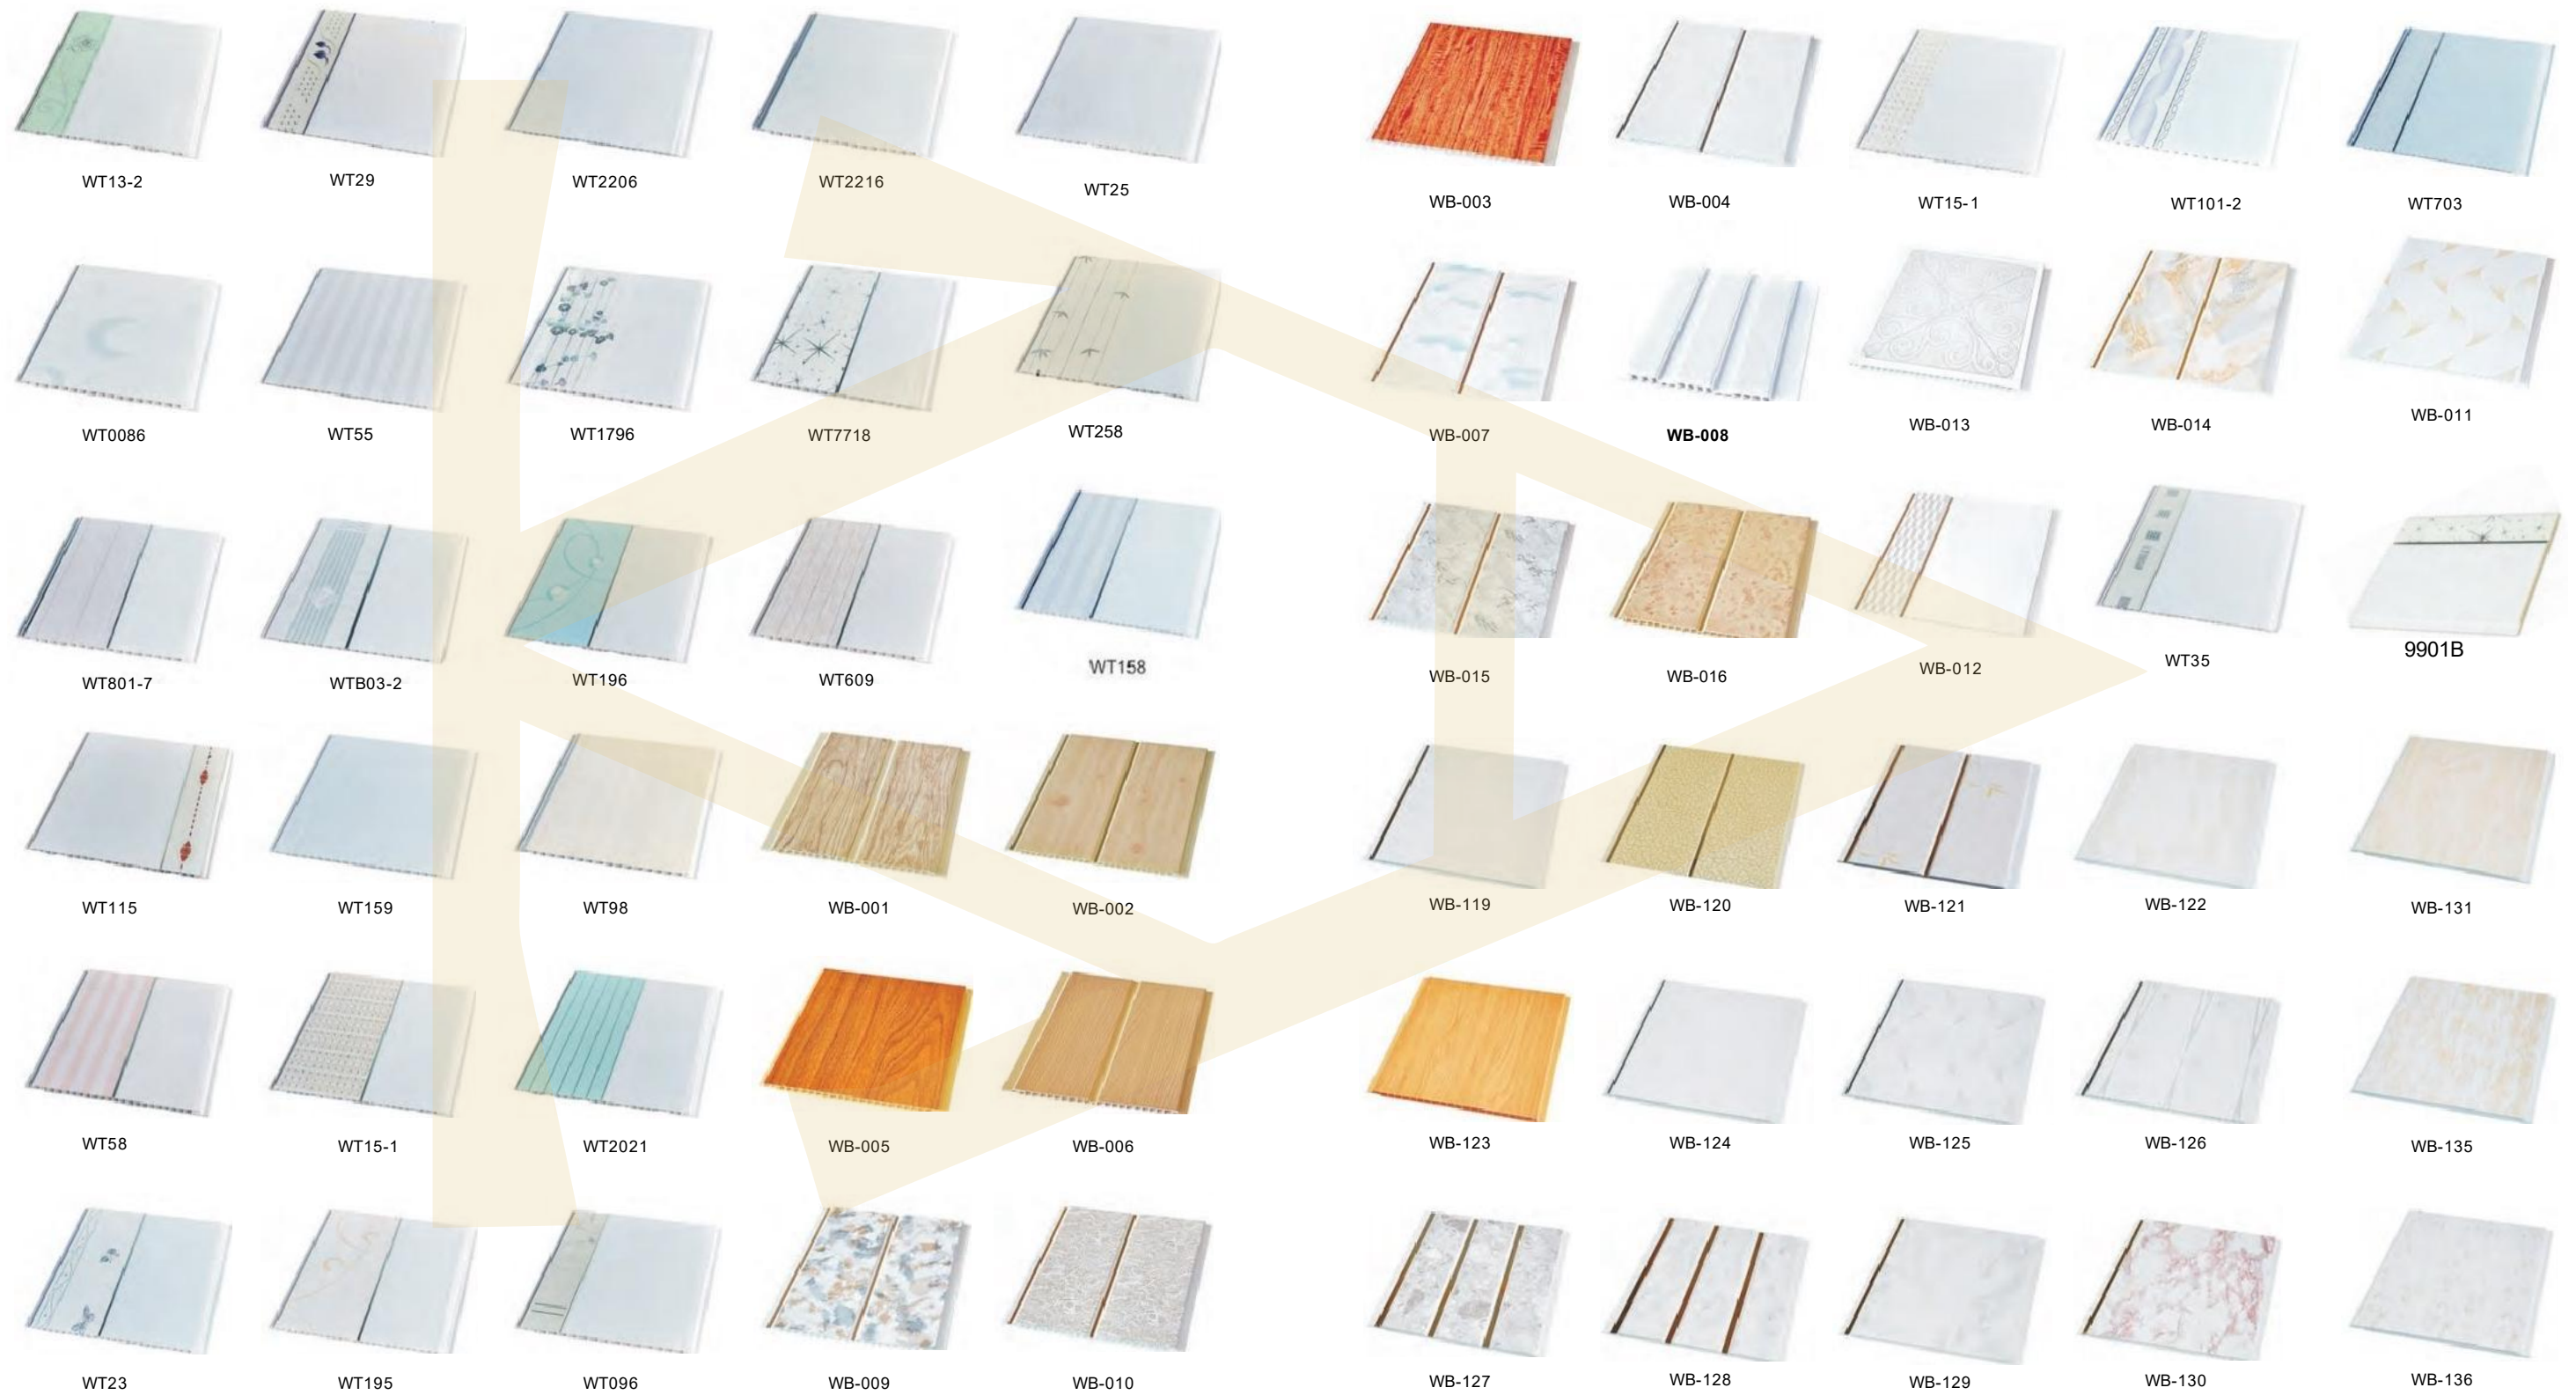

PVC PANEL
覆膜系列 >>>


WIDTH:20-25-30cm
THICKNISS:0.75/0.8/0.9cm
FOB FOSHAN

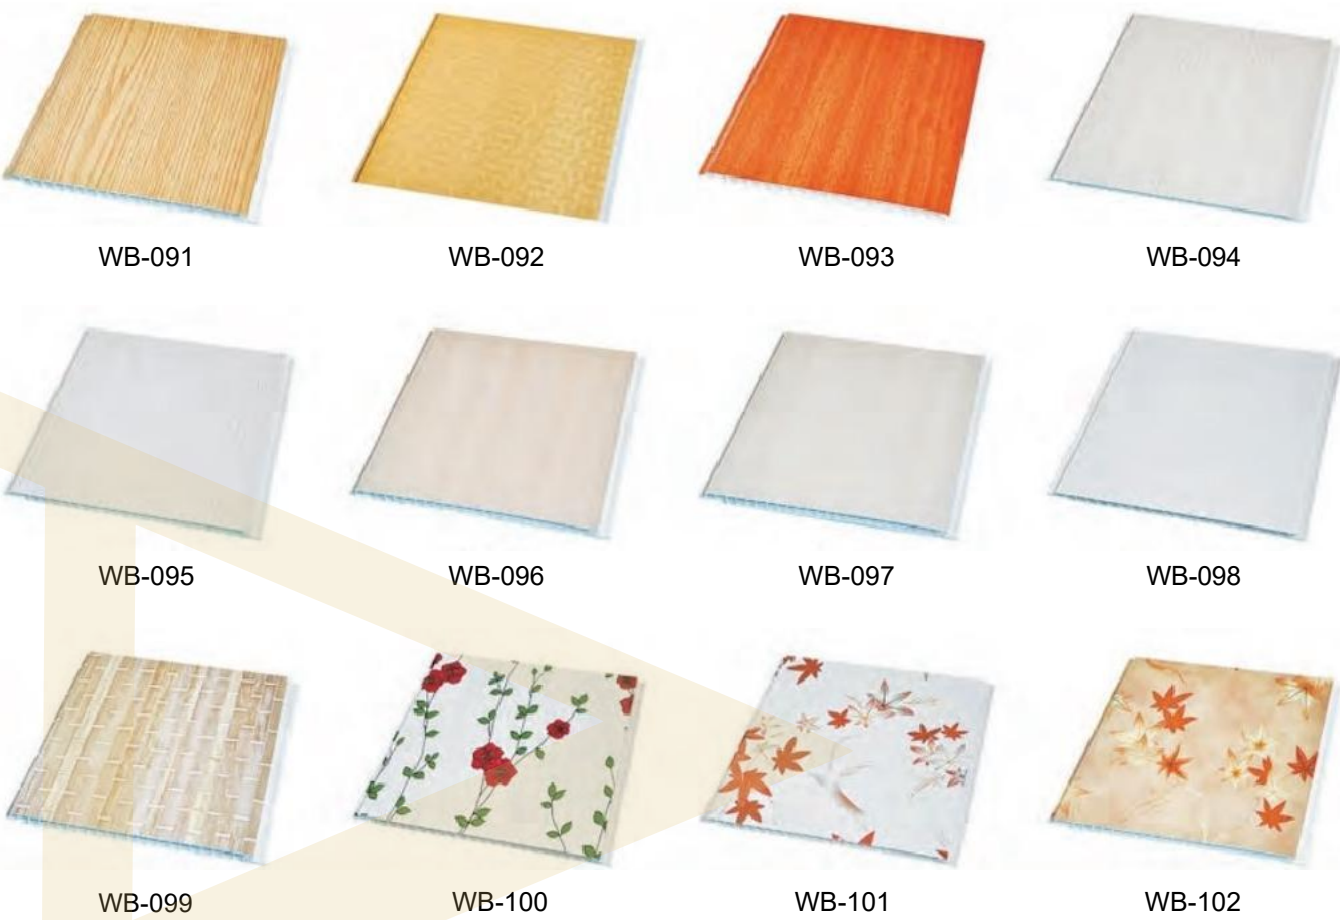

PVC PANEL
覆膜系列 >>>

WIDTH:20-25-30cm
THICKNISS:0.75/0.8/0.9cm


FOB FOSHAN

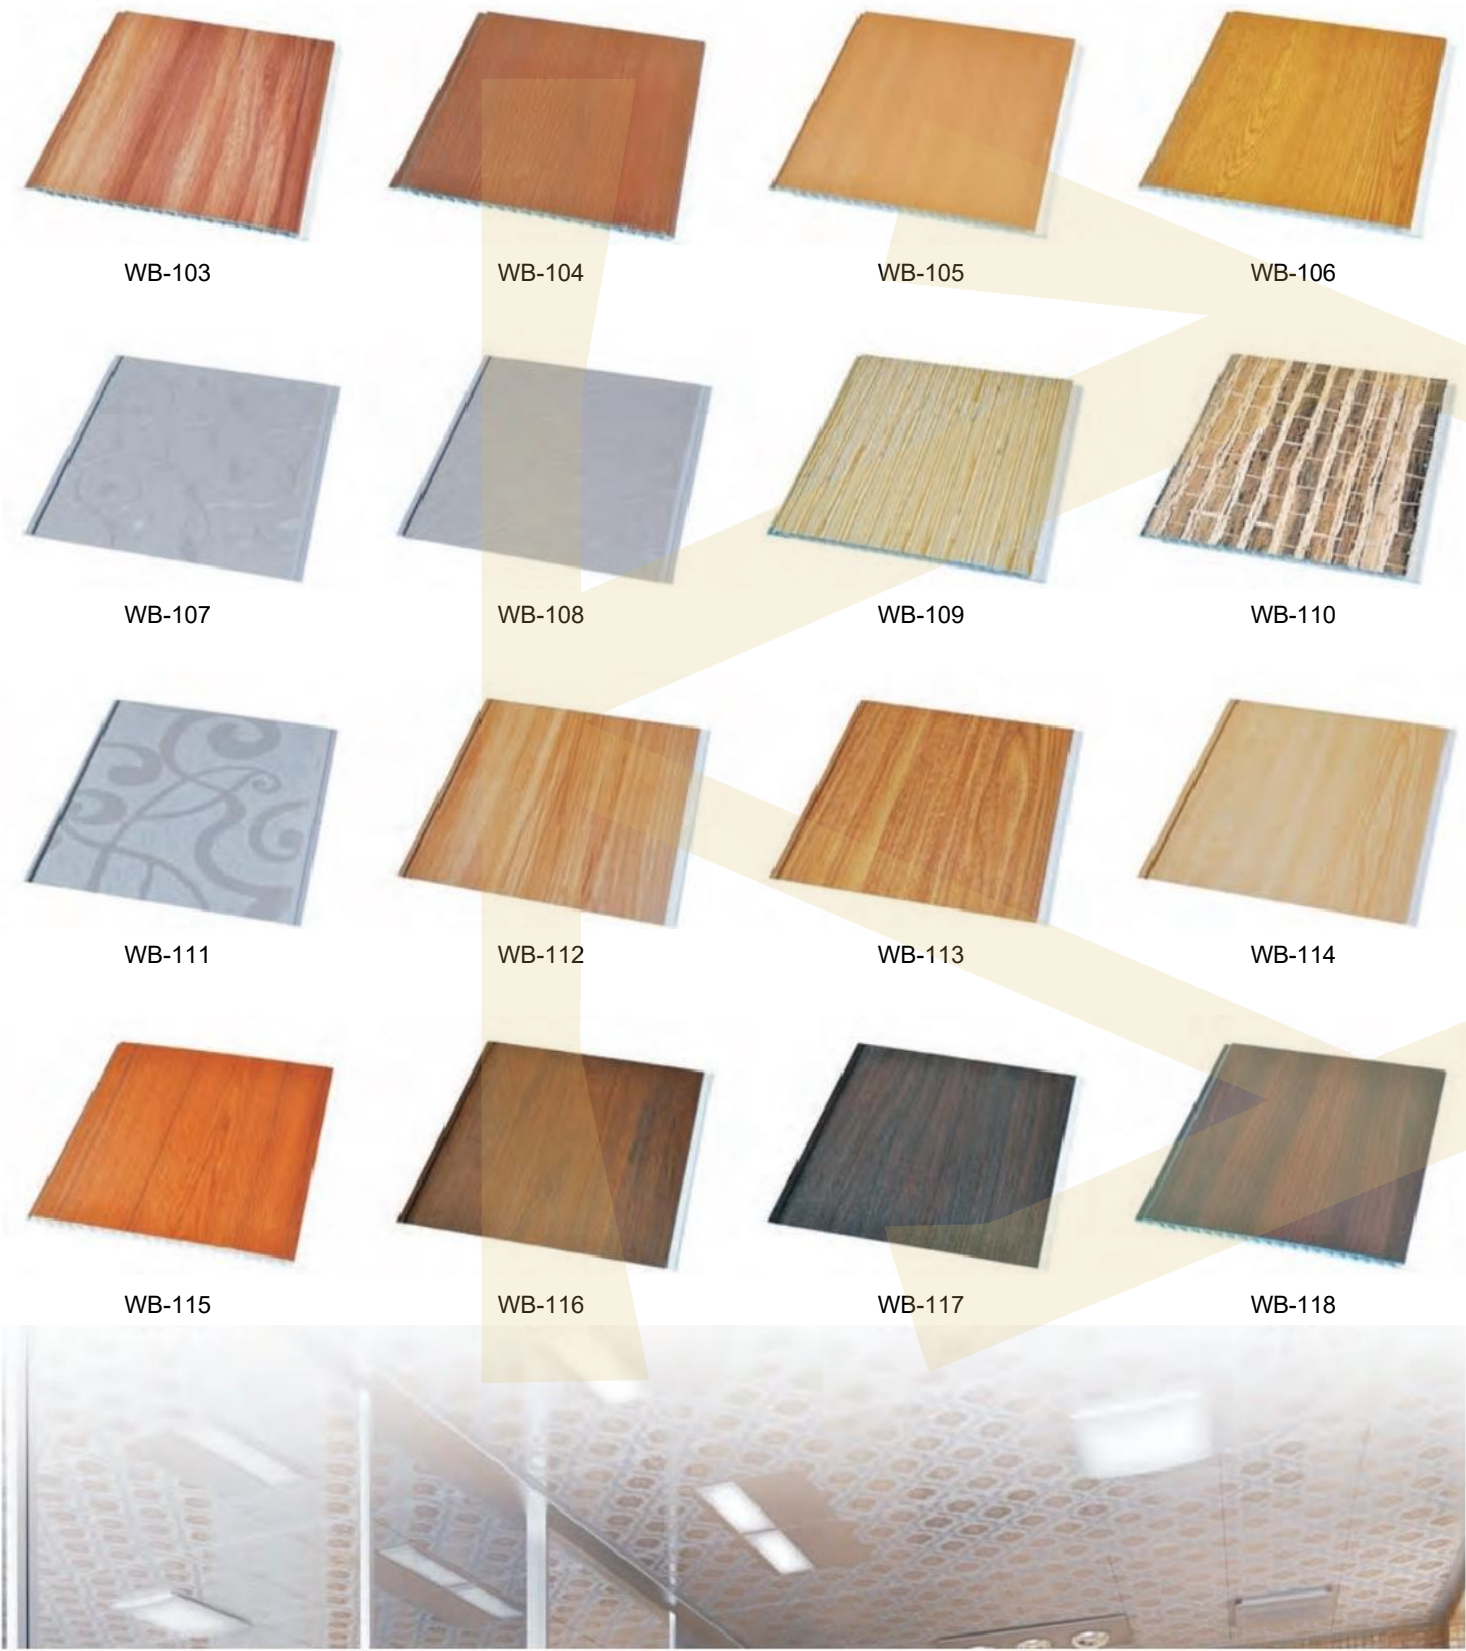

PVC PANEL
覆膜系列 >>>

WIDTH:20-25-30cm
THICKNISS:0.75/0.8/0.9cm


FOB FOSHAN

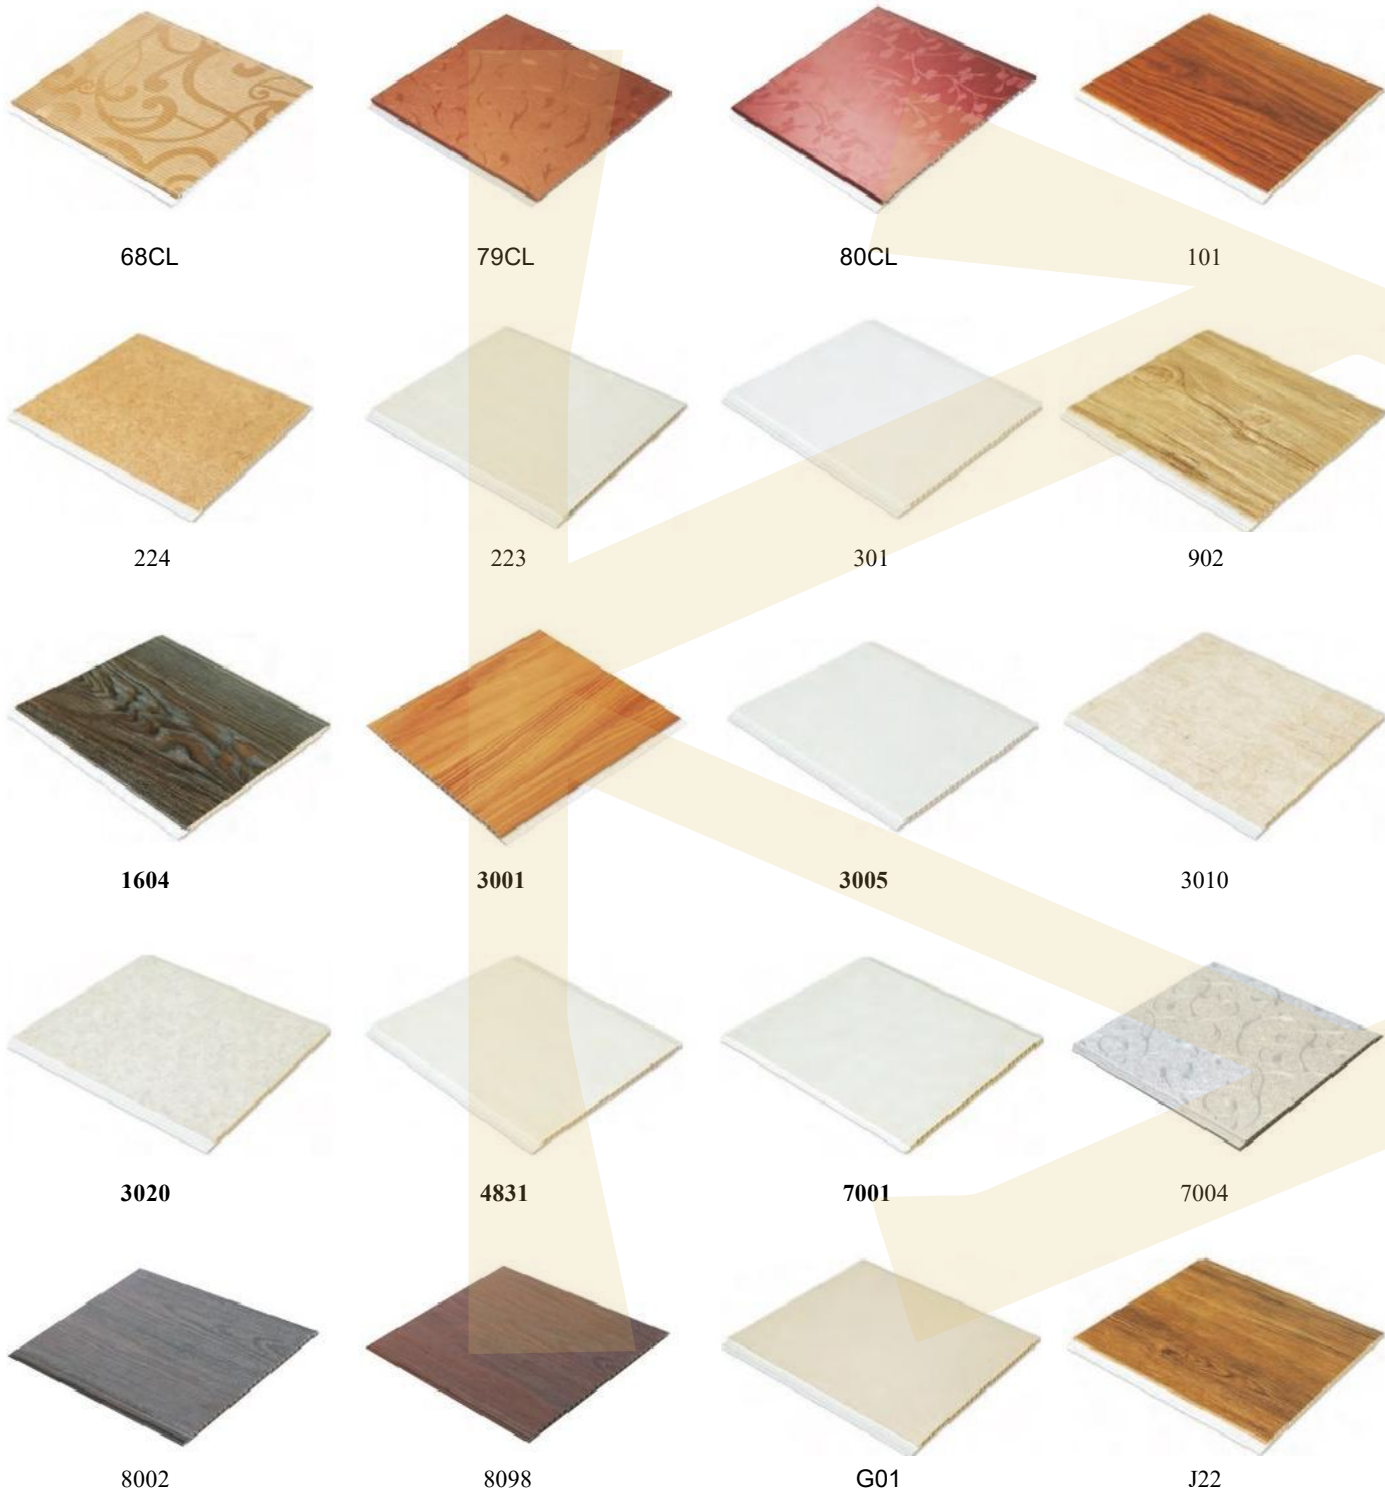

PVC PANEL
扣板系列 >>>

WIDTH:59.5x59.5cm
THICKNISS:0.7cm


FOB FOSHAN

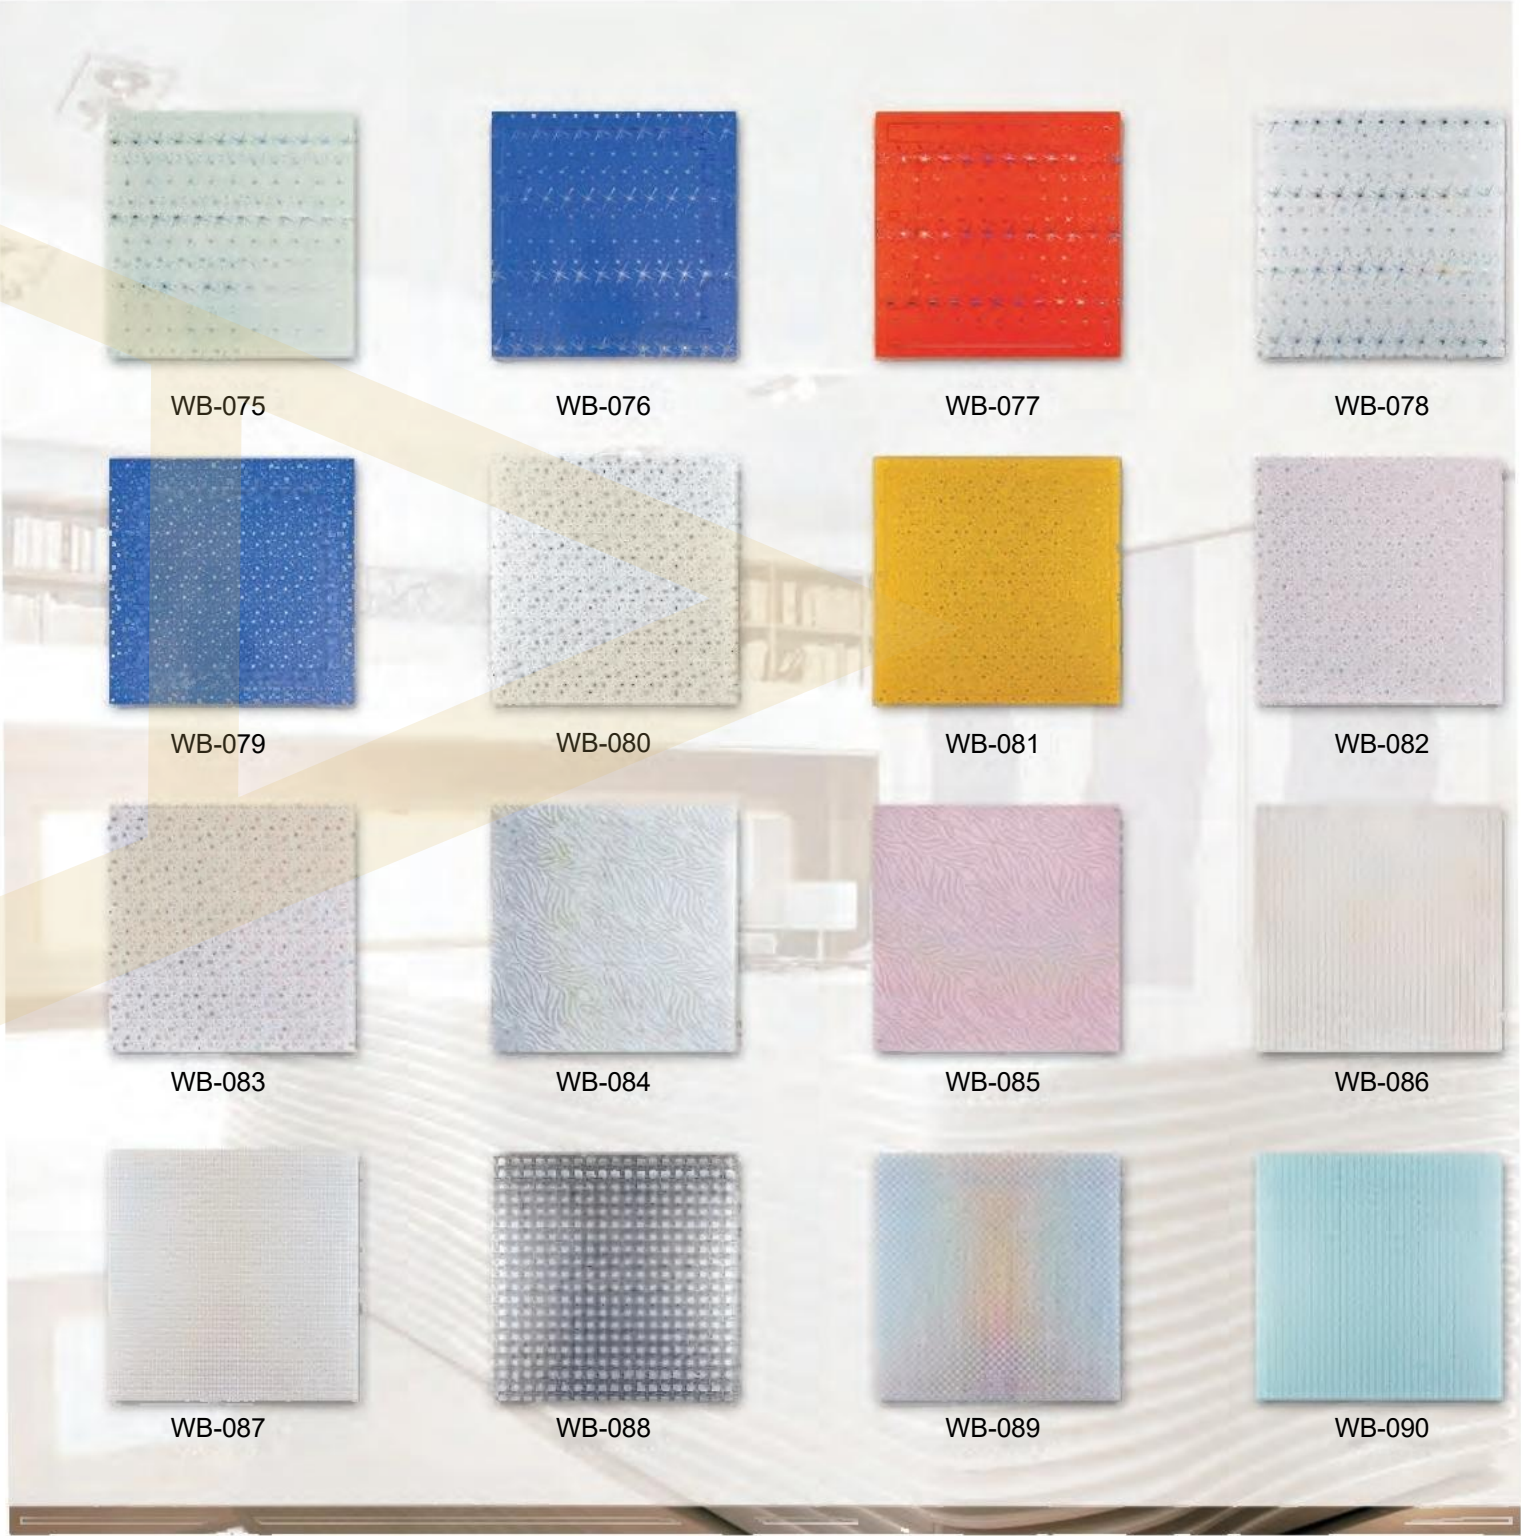

PVC PROFILES(JOINT CLIPS)

配角线系列 >>>

FOB FOSHAN

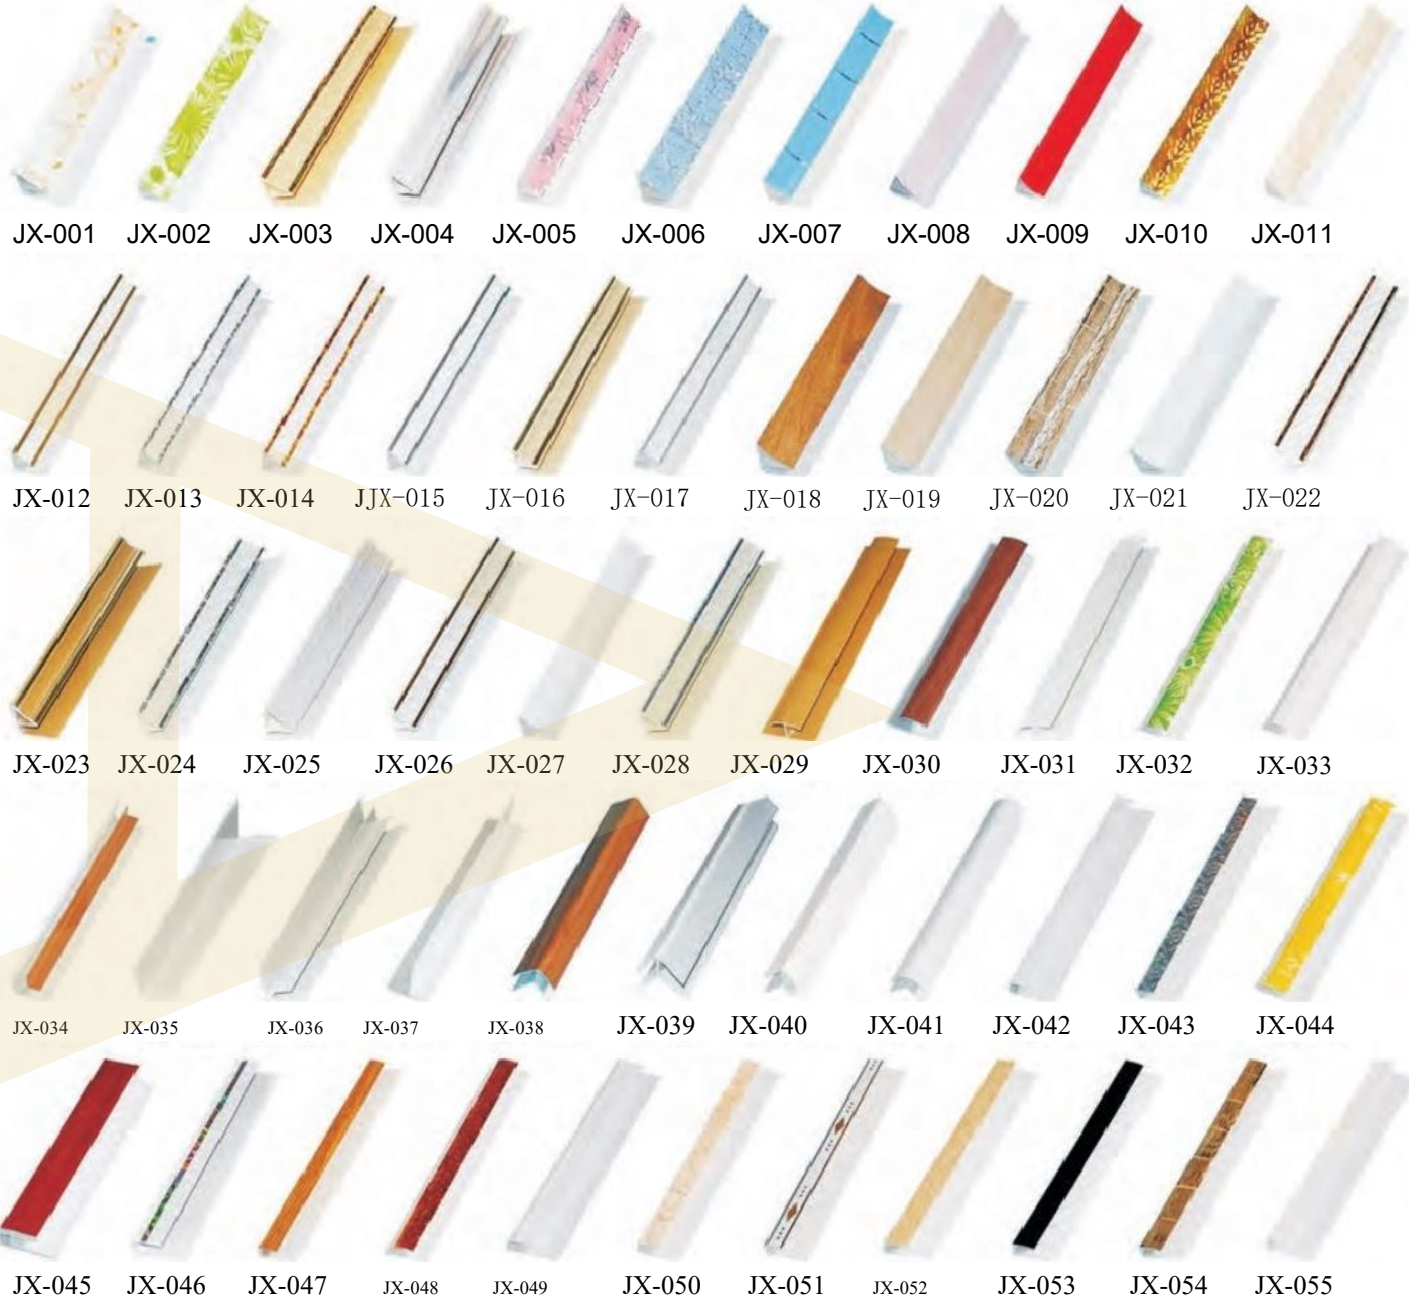



KAREEMA INDUSTRY INC.

Is a leading professional manufacturer of ceiling & partition system in China, which has won a very high reputation within our client network after more than 20 years of effort and development.

We expanded our business scope to both exporting and trading in overseas market to strengthen our trading ability, we have made substantial investments in human resources.

Our modern manufacturing facilities and state-of-the-art equipment allow us to customize the products to meet the most stringent customer requirements. In co-operation with our global business partners, we have developed numerous products to international standards.

KAREEMA main products are Metal Ceiling series; T-grid suspension system; Galvanized channel, mineral fiber ceiling, PVC gypsum ceiling and paper gypsum board for ceiling and partition series.

KAREEMA has set up the quality control system and scientific management system, which are very strict in design, raw materials, sales and after sales service.

We have obtained the certificate of CE and ISO9001:2000 international quality management systems.

Contact us today and let KAREEMA Be your reliable partner in China. It will be one of the best business decisions you have ever made.

MAIN ADVANTAGES

1. FIRE PROOF

KAREEMA Fire proof gypsum Board was tested by the National Center for Quality Supervision. It is designed for fire insulation up to 1-3 hours.

2. MOISTURE / WATERPROOF

KAREEMA Moisture/water proof Board is excellent in moisture/water-resistance. It is made from extra tough paper mixed with wax, and the compound of gypsum board has silicone which reduces moisture absorption of the board.

3. HEAT INSULATION

KAREEMA gypsum Board has heat prevention material incorporated, it has great feature of heat prevention. Thermal resistance is 1.14 m² K/W.

4. SOUND INSULATION

KAREEMA gypsum Board proved to have good noise insulation property after inspected by the National Center for Quality Supervision and Testing of Fire Building Materials (NFTC). The noise insulation factor of the wall can reach 44 dB and 47 dB. It has the best noise insulation constitution in China, especially the 95 mm wall comprised by the 10 mm board.

5. COMMERCIAL BUILDING MATERIAL

KAREEMA gypsum Board is ideal for ceiling and single layer partition in residential and commercial building. It can save time, space, and expense. It is a new and high efficient wall.




SPECIFICATION

Wall: Width X Length 2400x1200 (mm)


Thickness: 6-12 (mm)

Ceilings: Width x Length 2400x1200 or 600x600 (mm)

Thickness: 5-6 (mm)

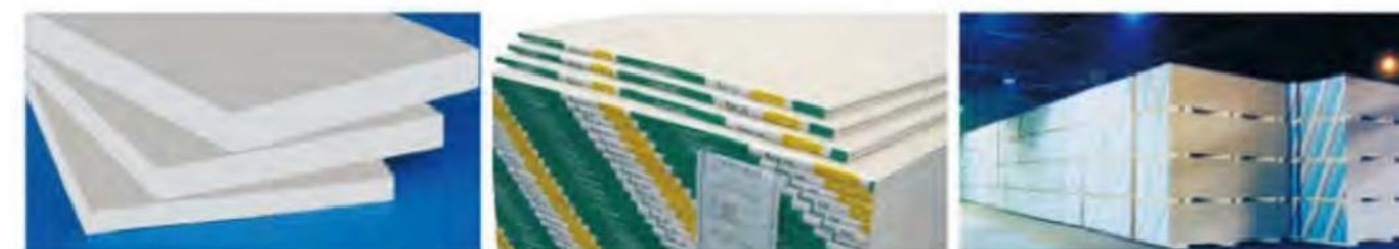

THE APPLICATION OF DRYWALL SYSTEM

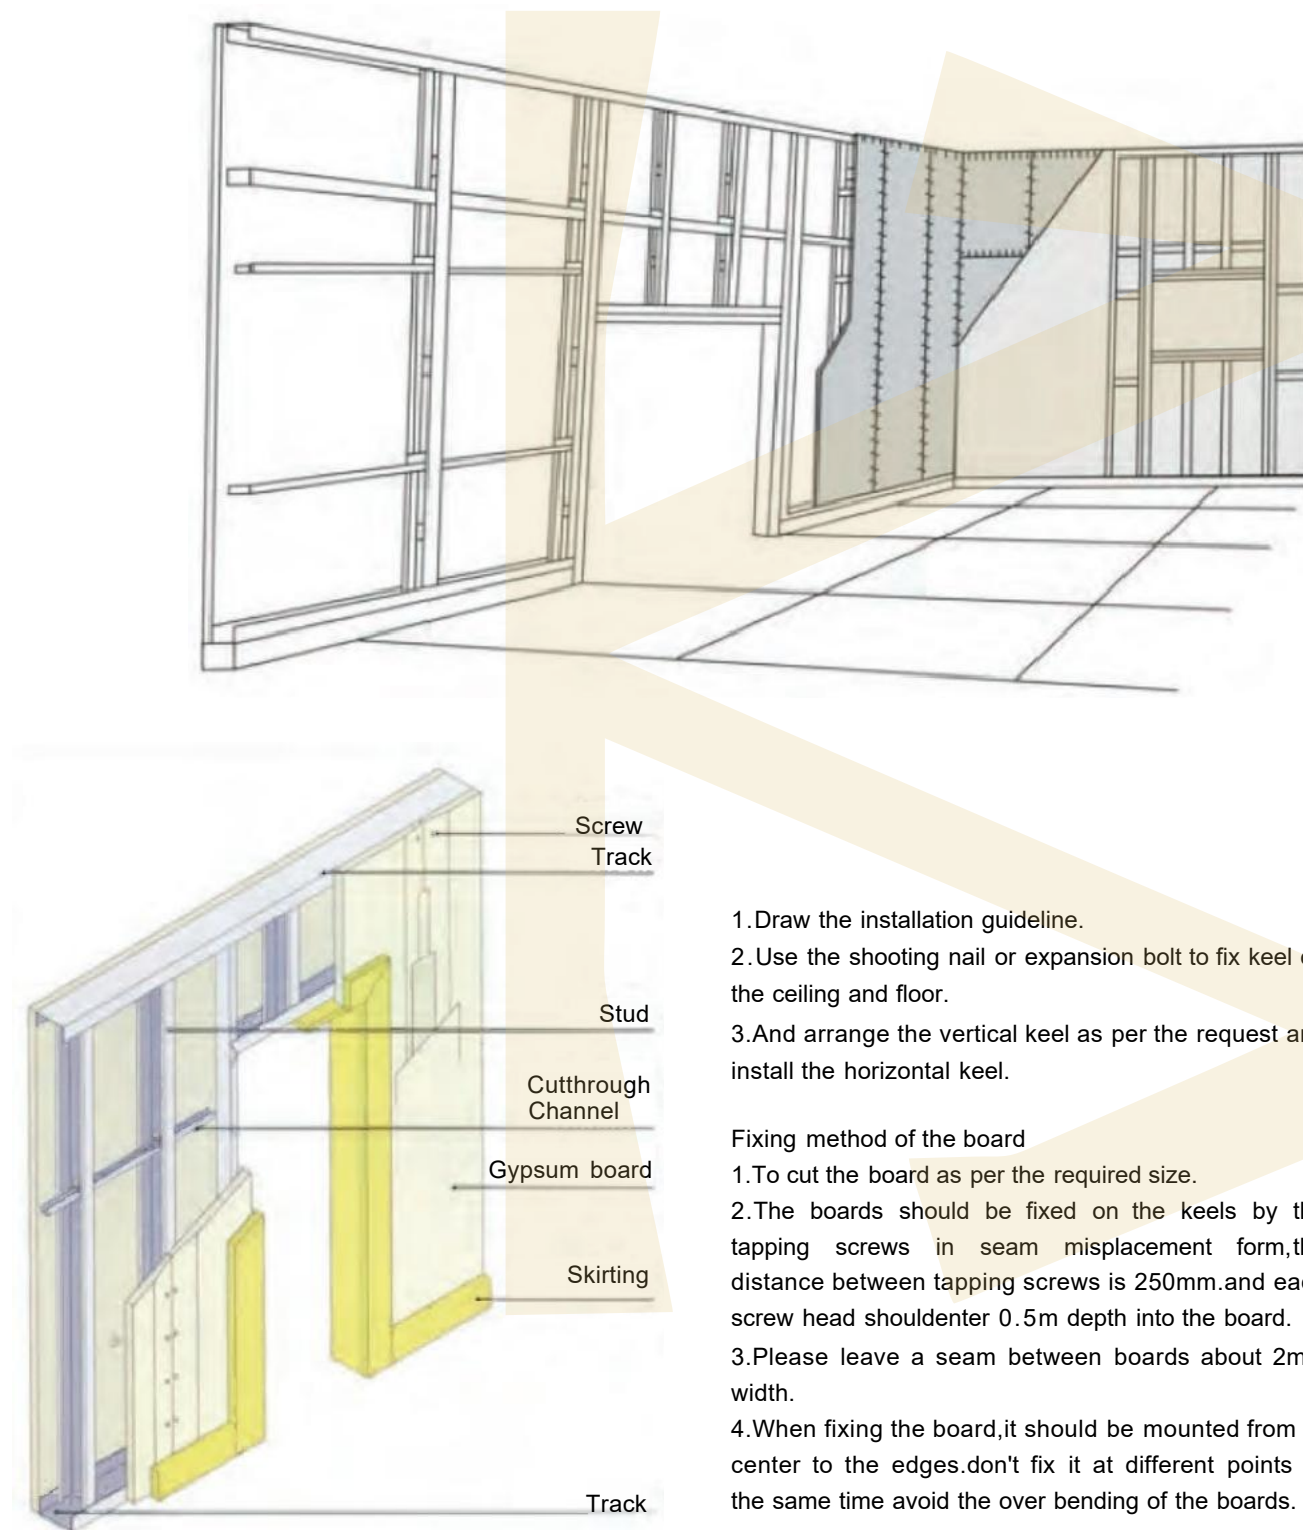


1. Draw the installation guideline.
2. Use the shooting nail or expansion bolt to fix keel on the ceiling and floor.
3. And arrange the vertical keel as per the request and install the horizontal keel.


Fixing method of the board

1. To cut the board as per the required size.
2. The boards should be fixed on the keels by the tapping screws in seam misplacement form, the distance between tapping screws is 250mm, and each screw head should enter 0.5m depth into the board.
3. Please leave a seam between boards about 2mm width.
4. When fixing the board, it should be mounted from its center to the edges, don't fix it at different points at the same time, avoid the over bending of the boards.

INSTALLATION OF GYPSUM BOARD SYSTEM

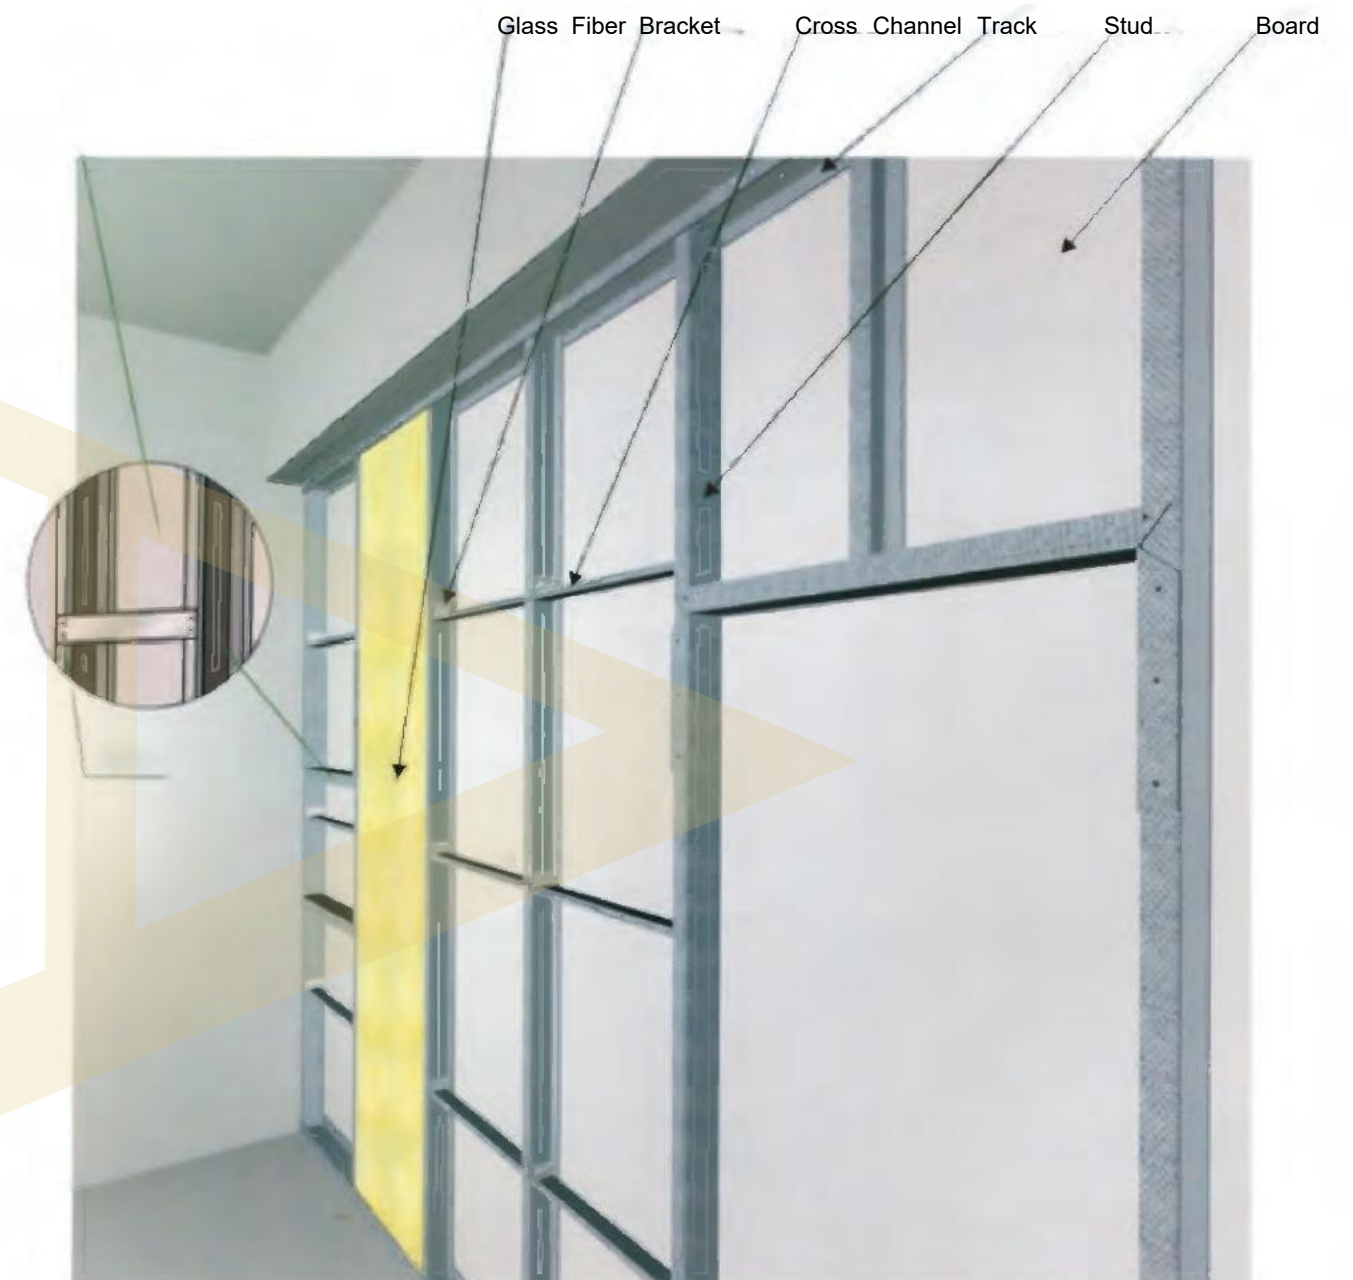

INSTALLATION OF GYPSUM BOARD SYSTEM

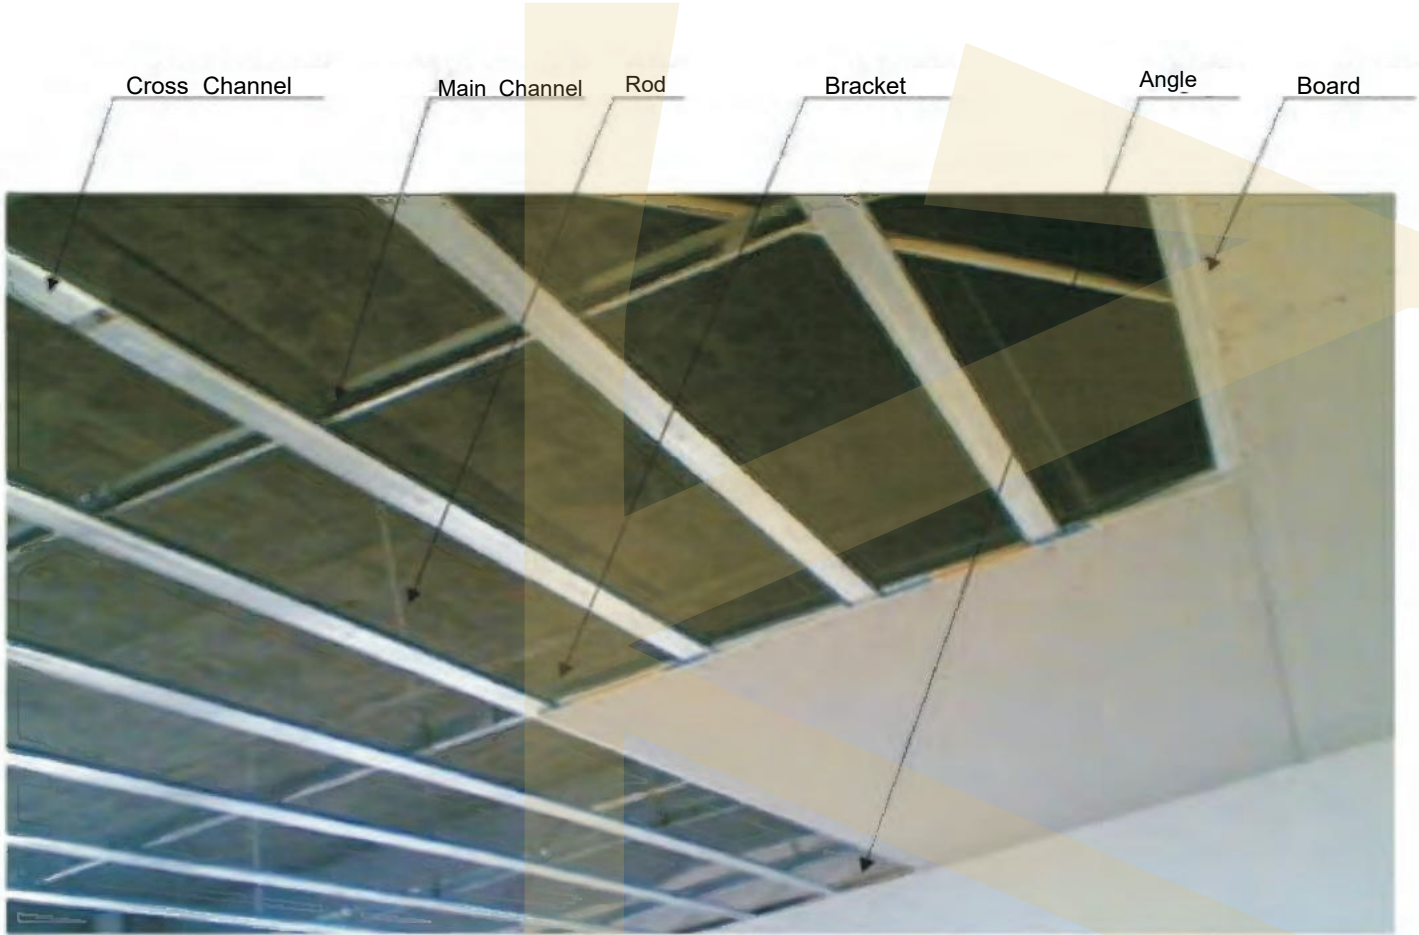

Detailed Product Description

KAREEMA gypsum board is used natural gypsum powder through special treatment then together with high quality face paper as made.

Function:
1,Interior wall and partition.2.For ceiling system 3.Sound-adsorbingwall body
4.Fire-proof 5.Damp-proof 6.Durability and long service life 7.High strength 8.Good heat
And sound insulation.

Specifications:
1220mm×2440mm;1200mm ×2400mm;3000mm ×1200mm;2500mm ×1200mm;Thickness:
7mm-15mm.Other optional specifications available.


Standard specification:Products meet national standards ofChina,ISO gypsum board
Standard and the CE standards.
Beside,we also do the customers-made according to your special requirements.



ITEM	EDGE	LENGTH	WIDTH	THICKNESS
PLASTERBOARD	TAPERED SQUARE	2400	1200 1200	9.5
		2440		12.0
		2700		12.5
		3000		12.7
		3600		15.0
		3660		15.9

THICKNESS	LOAD BREAKING STRENGTH		REMARKS COLUMN:NON-NATIONAL STANDARD PRODUCTS,AND RELEVANT DATA CAN BE FOUND THOUGHASTMC13960- 04,BS1230 AND ISO6308STANDARDS DOCUMENTS,
	VERTICAL	HORIZONTAL	
9.5	360	140	
12.0	500	180	
15.0	650	220	

GYPSUM BOARD ACCESSERIES

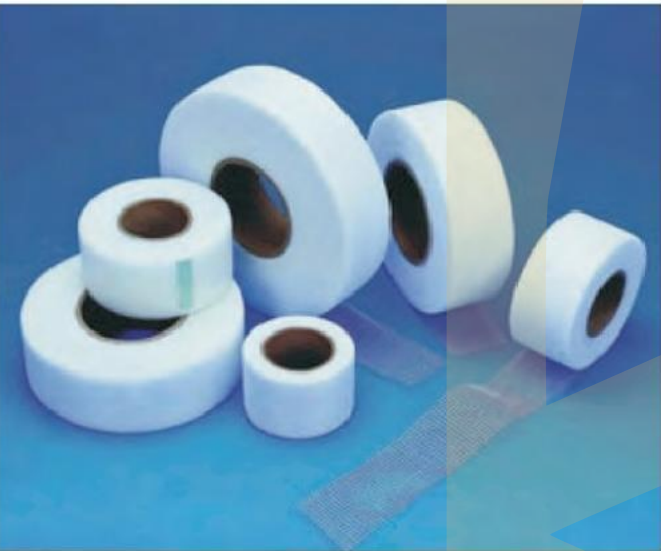

Glass Fiber Mesh

- Specifications
- 1.mesh size:2.85x2.85mm,4x4mm
4x5mm,5x5mm,10x10mm
 - 2.weight per unit area:50-300/m²
 - 3.width:1-1.2m
 - 4.length:50m or 100m
 - 5.color:white,orange,blue,etc.



Metal Corner Tape


- Specifications
- 1.mesh size:50mmx30m
 - 2.Application:ues in a variety of drywall applications: Internal or external corners which are 90 degrees of not 90 degrees,for manual application only.

GYPSUM BOARD ACCESSERIES



Screw

- Specifications
- 1.product:gypsum board screw
 - 2.material:carbon steel
 - 3.finish:black phosphated/galvanized
 - 4.size:#6x25mm

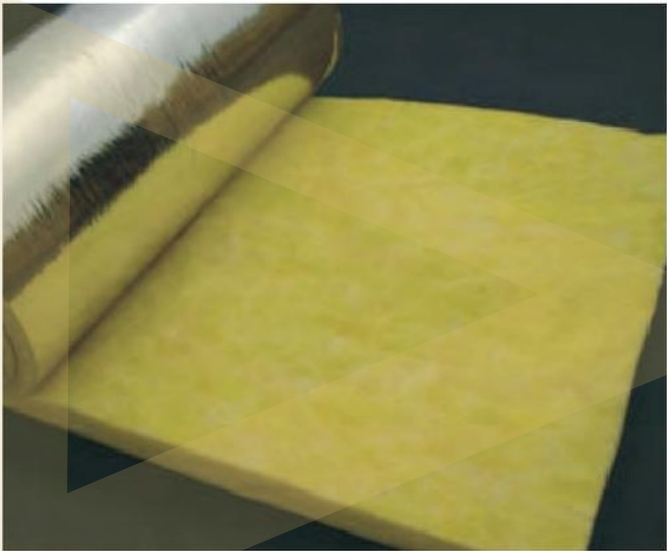

Fiber glass blanket


- Specifications
- 1.heat insulationmaterials
 - 2.average diameter of fibers:7um
 - 3.density:10kg/m²-25kg/m²
 - 4.thickness:20mm-100mm
 - 5.width:90mm-1200mm
 - 6.length:5m-30m



Interior Wall Putty

- Feature:
- 1.containing no toxic substances,healthy
 - 2.easily available and efficient to apply it on the wall directory
 - 3.no wastage of water curing
 - 4.free from shrinking and cracking
 - 5.ensures full strength on setting
 - 6.shows excellent adhesive qualities with the surface
 - 7.has a good impact strength

GYPSUM BOARD SUSPENSION SYSTEM

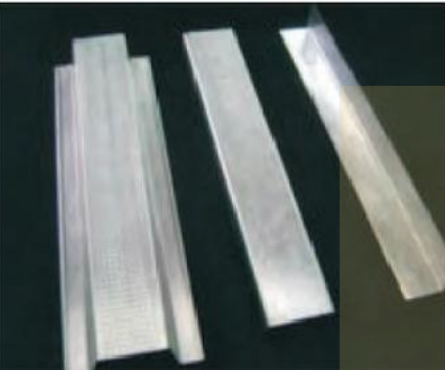


Furring channel & main channel




stud & track




Clip in channel

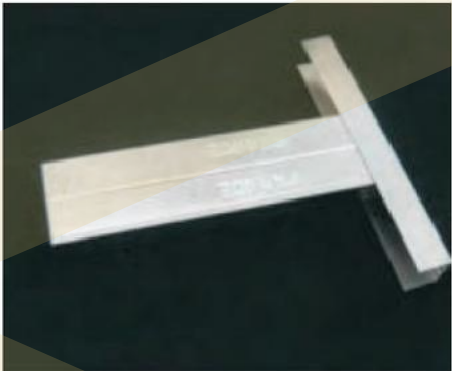


DC60&DU28

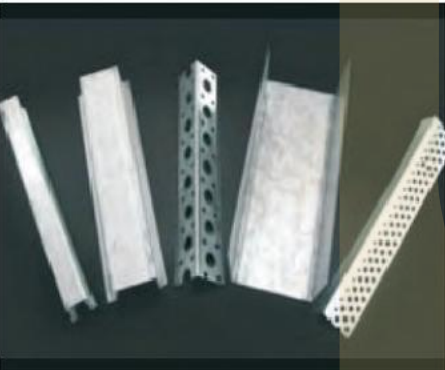

Australian channel

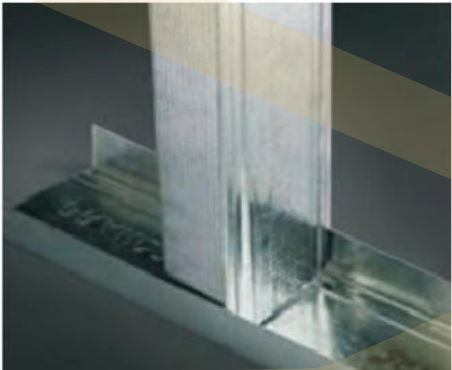

Stud 63&track 64

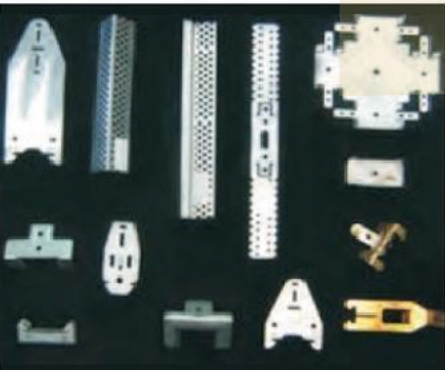


Accessory



Structure channel

kareema GYPSUM BOARD SERVICE PROCESS

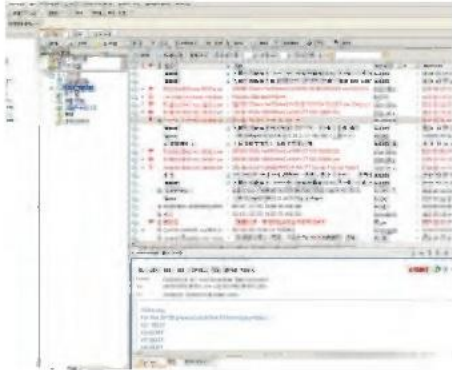

Received Your Inquiry



Our Professional Staff Handle Your Inquiry



Place The Order



Confirm The Detail & Design



Start Production



SendFor Shipment