



CE

ISO9001



A Subsidiary of Kareema Group

Tel: +971 56811168 / +971 544771239

Email: info@beitalkareema.com

Add: 5 17A St, Al Khabaisi, Dubai P.O.Box 10776

FLOOR COVERING HARDWOOD

FLOOR COVERING HARDWOOD

Solid|Engineered Wood|Parquet





WHY BERGEIM

Kareema Industry Inc,established in 1997,is aming to supply high quality flooring to better your life."Bergeim is one of Kareema's flooring brand,apply to Wood &Bamboo,and Laminate flooring.Its brand image is Zoro,stands for top quality flooring.

Bergeim is an integrated production enterprise,including wood&bamboo flooring,and laminate flooring.Our production bases are located in GUANGDONG province.We are entitled to cultivate and develop around 200 million sq.mt forest resources,which guarantee the quality control from raw material to each production process.

Bergeim wood flooring is well eceived in countries all over the world.A large number of world-renowned chain stores,flooring distributors and importers have established long-term business relationship with us.We willalways deliver more than you expect.

Tap&go global patent locking system,developed by Kareema,js widely applied in high quality Wood&Bamboo and Laminated flooring.No glue,no nail instaltation enables you the DIY pleasure and saves you large amount of labour cost.

Choose Bergeim flooring, choose better life.

Introduction

Flooring Surface 01-02

Flooring Specification 03-04

Products

Deluxe collection 05-12

Urban collection 13-22

Exotic collection 23-28

Palais collection 19-33

Flooring accessories 34

Tap&Go Flooring Installation and Warranty 35-37


Bergeim Integrated Manufacturing Base 38

Tap&Go Locking System 39-42

Flooring Surface

Profile of Coatings

7-12 layers quality lacquer, low emission, unique color, better anti-scratch

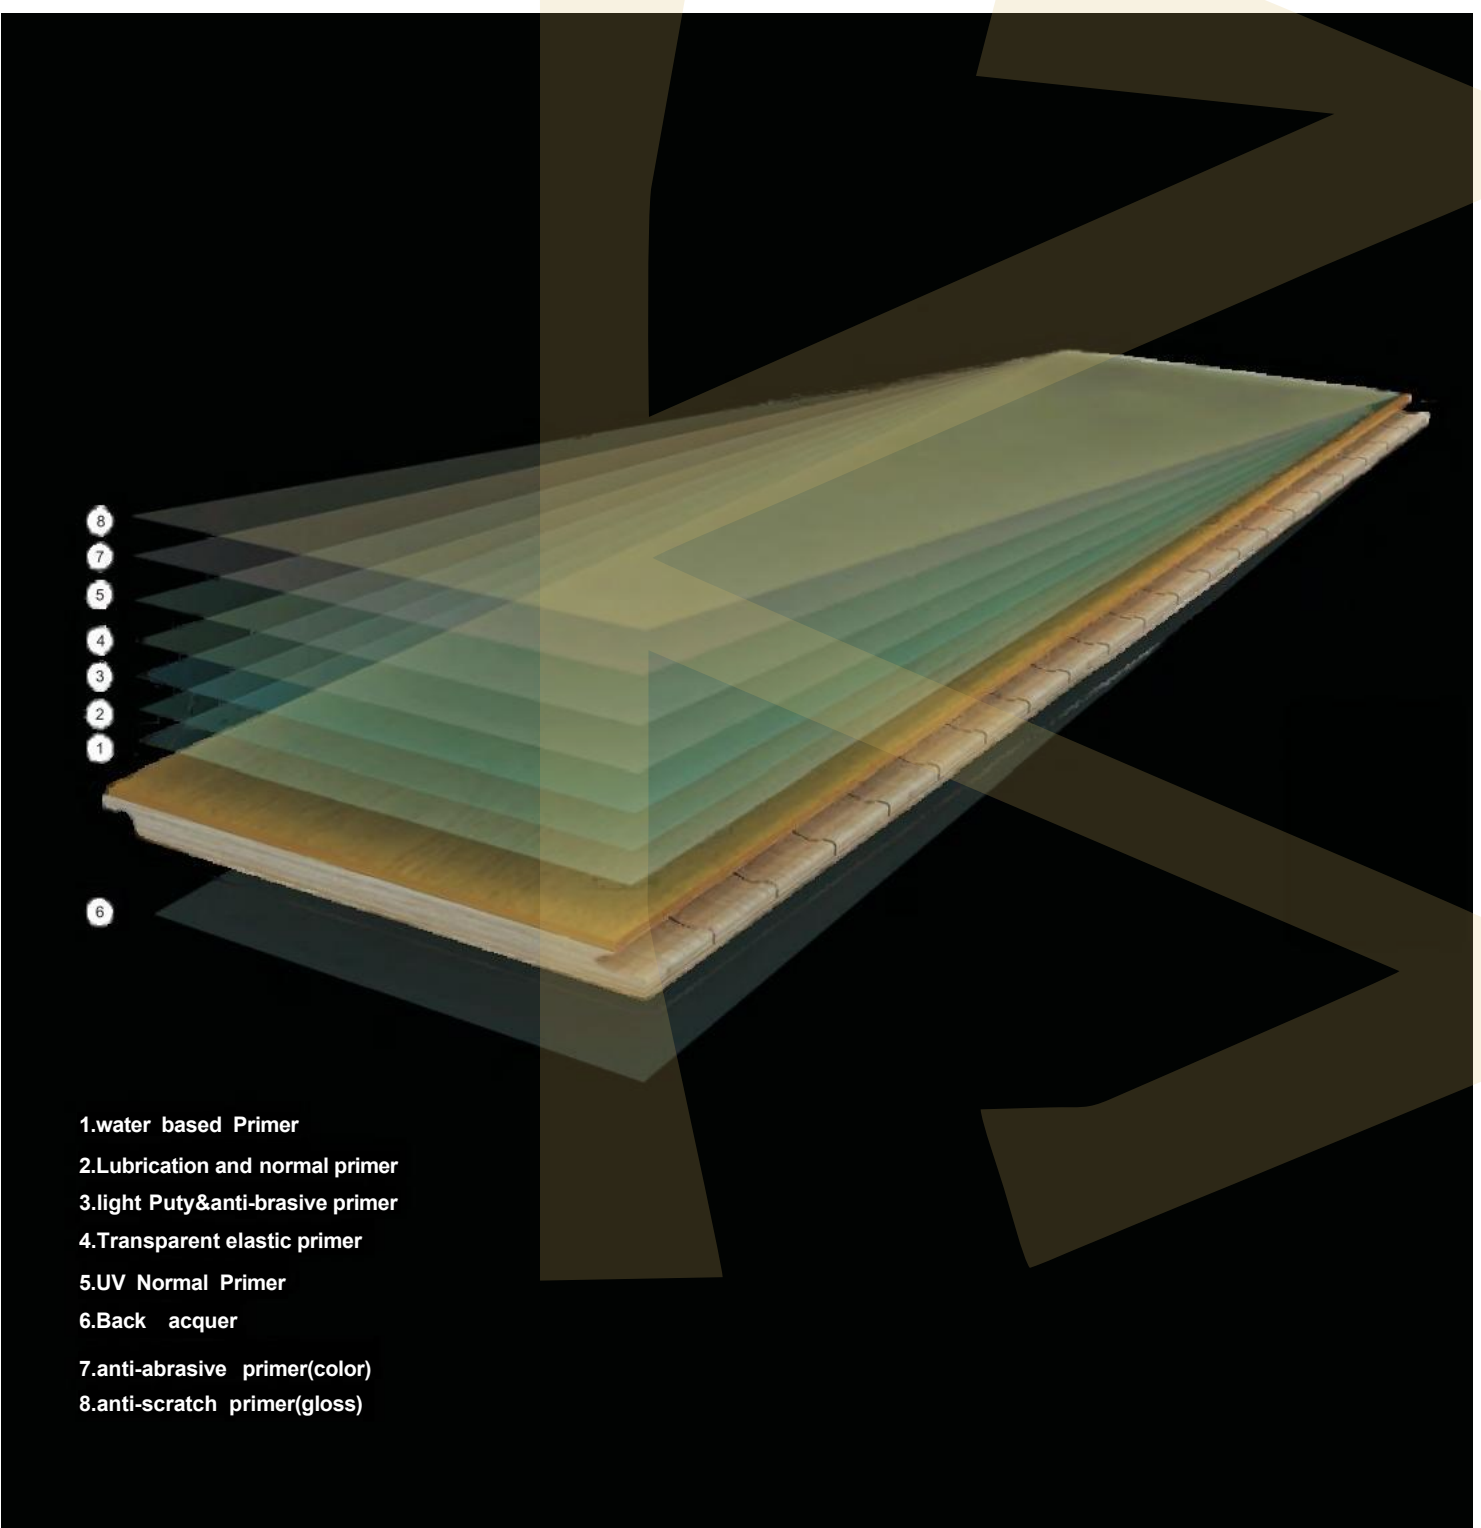

- 1.water based Primer
- 2.Lubrication and normal primer
- 3.light Puty&anti-brasive primer
- 4.Transparent elastic primer
- 5.UV Normal Primer
- 6.Back lacquer
- 7.anti-abrasive primer(color)
- 8.anti-scratch primer(gloss)

Different Finish

■ Natural color

The surface is without any special treatment,just 7-12 layers transparent lacquer.Thus pure wood color and real wood grain comes without any disturbing elements to this style.Inspiration comes from nature's tranquil palette,creating a cool interior look,characterised by abundant use of different flooring,especially to the precious wood:walnut,burma teak,acacia,merbau etc.

■ Stained color

Stained color process changes the color of timber and brings the wood floor for rich apperance And for dark color is very attractive alternative to exotic woods.In the light stained product,the wood grain is smoother and thus generates an even surface look.

■ Fumed

The fuming process changes the color of the timber,but only rich the natural color and wood grain more siginificant,a particularly warm shade of colour is generated,not only on the surface but throughout the wood.With the addition of staining or oiling,or slightly brushed,the colour becomes more ingrained.And this style integrates the most morden and old look of the themedhome.

■ Carbonized

This is purely physical modification technology.The wood is treated at a high temperature for carbonization. Carbonized floor is an essential natural air cleaner,because it reduces the concentration of hydroxyl groups in wood components. Carbonized floor is more stable,becauseit decreases the moisture absorption and internal stress of wood.

■ Oiled

There are two kinds of oli,natural oil and UV oil,and as wood is a natural.The oil is extracted from plant and trees.And the surface does not emit any dangerous chemicals or gases.Oil accentuates the character of the wood and provides a natural feel to the wood flooring.

■ Textured surface:brushed,saw mark,handscraped

Wood grains and rings are emphasised by the special treatment.It is an antique look.This flooring is an unique combination of craftman-ship and selected raw materials.Most floor is usually a mix of light brushing, staining,sanding and coloured oil etc.


Solid Wood Floor

100%solid,cuttet fine workman ship and carefully selected rawmaterial




3 Layer engineered wood floor

Top layer:2mm to 4mm thick precious hardwood.
Core material:High quality wet land pine,poplar or Jiufang Yuan HDF
Back layer:poplar wood.
Kareema own its own forest,We can better to control its raw material from the tree planting.

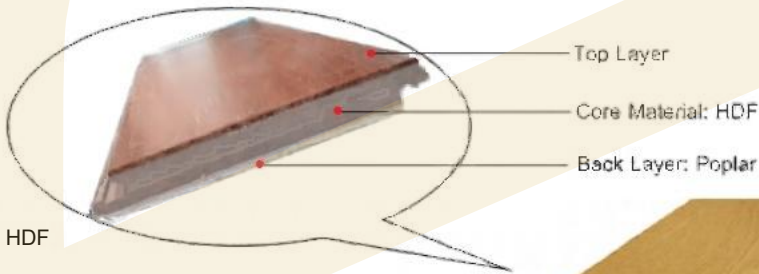

Top Layer
Core Material
Back Layer

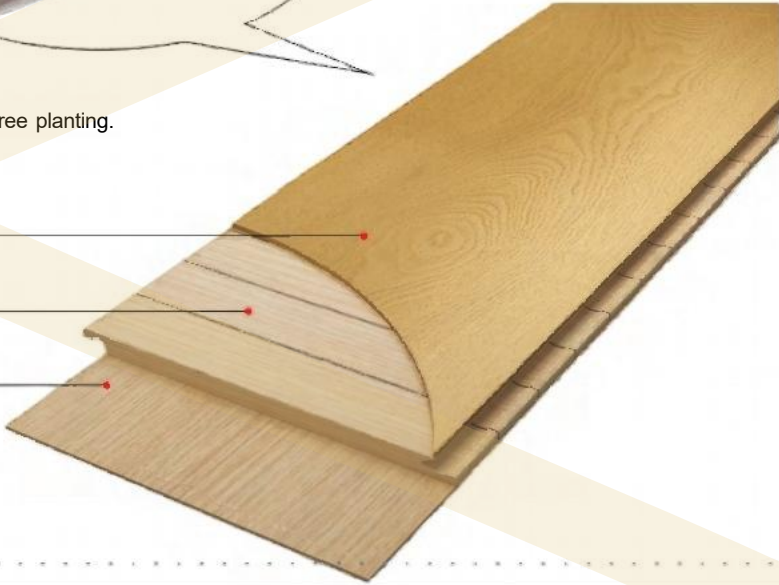

Multi-layer engineered wood floor

Top layer:0.6mm to 6mm thick precious hardwood
Core material:7mm to 14 mm thick,in multiple (odd numbers) layers,
Kareema own its own forest,so can better to control its raw material from the tree planting.

Top Layer
Core Material
Back Layer



Flooring Specification

Specification on Kareema Wood Floor

Class	Structure	Wood Species	Grade	Length(mm)	Width(mm)	Thickness (mm)
5 Star	Solid	oak Maple Taun	AB,ABCD,CD	RL(300-900/1200) 910	90 (92,95) 110 120(122,125)	18
4 Star		Birch Hickory	AB,ABCD			
5 Star		Teak Santos Mahogany Acacia Walnut	AB,ABCD			
4-5 Star	3-Layer engineered	Oak Walnut	ABCD	1860(1900)	184(152) 189(192)	14/3 15/4
3-4 Star		oak Maple Taun	AB,ABCD	RL(300-1200) 910 1200(HDF)	125(122,120)	14/3 12/2(HDF) 11.2/2(HDF)
4-5 Sta		Teak SantosMahogany Acacia Walnut	AB,ABCD			
3-5 Star	Multi-layer engineered	Oak Walnut	ABCD	1860(1900)2200 RL(300-1500)	148 (152) 189 (192) 220 260	10/1.5 12/2 14/3 15/4 18/5 20/6
4-5 Star		oak Maple Taun	ABCD	1860(1900) RL(300-1500)	148 189	12/2 14/3 15/4
4 Star		Teak Santos Mahogany Acacia Walnut	AB,ABCD	910 RL(300-1200)	90(92,95) 125(122,120)	10/0.6 12/2 14/2 15/3
4-5 Star		Birch Hickory	AB,ABCD			
3 Star		Birch Hickory	AB,ABCD	910 RL(300-1200)	88 127 166	10/1 12/2

Remarks:The above specifications are for reference only and would be changed without notice.Please check and confirm with us before the order.
If you don't find your request specifications,please contact us.
Wood is a natural product and has natural color variations.Colors in this catalogues are for reference only!





Deluxe Collection

Deluxe collection are wide plank and long strips of oak and walnut, which make your home unique, either can be modern, warm, elegant or antique style. The surface are usually mixed with brushed, oiled, fumed, saw mark treatments etc to give the wood a fresh cut look and to enhance the intricate wood grain patterns.

Deluxe collection include vernal series, terra series and rustic series.

Star	Structure	Wood Species	Grade	Length(mm)	Width(mm)	Thickness(mm)
4-5 Star	3-Layer engineered	Oak; Walnut	ABCD	1860(1900)	148(152) 189(192)	154
3-5 Star	Multi-layer engineered	Oak	ABCD	1860 (1900) 2200 RL(300-1500)	148 (152) 189 (192) 220 260	0/1.5 12/2 14/3 15/4 18/5 20/6
4-5 Star		Walnut	ABCD	1860(1900) RL(300-1500)	148 189	12/2 14/3 15/4



Oak Vernal Series

Light and pale color tone,creating a clam and airy feeling,pure simple and neutral.



Oak-01 Natural



Oak-02 Pale



Oak-03 White Oil



Oak-04 Natural&white Brushed




Oak-05 Deep Fumed&white Brushed



Oak-06 Deep Brown&brushed



Oak-07 Grey &Deep White Brushed

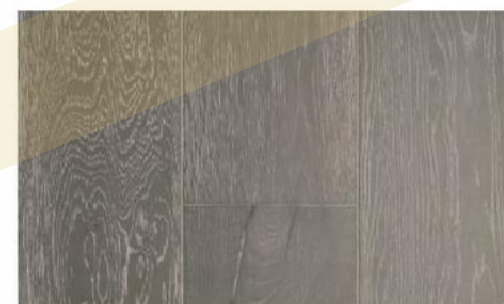

Oak-08 Black Grey&white Brushed



Oak-06 grey & brushed

Oak Terra Series

Modern dark colors match both contemporary and traditional interior designs. A perfect, strong and powerful contrast to colourful accessories and furniture in the room.



Oak-09 bronze&brushed



Oak-10 black&white brushed



Oak-11 stained brown&black brushed

Oak-11 stained brown & black brushed



Am. Walnut-01 natural



Oak-12 brown&white brushed



Oak-13 bronze&saw mark



Am. Walnut-01 natural





Oak Rustic Series

Deep colours add radiance and warmth to the classic interior and emphasises the elegance, and unique look. With natural wildy wood grains bring the beauty of nature to the comfort of your homes.



Oak-36 smoked&sawn mark



Oak-37 carbonized color, distressed&oiled



Oak-38 black red&brushed



Oak-39 smoked, distressed&natural oiled



Oak-40 deep fumed, distressed



Oak-41 deep brown&distressed



Urban Collection

A restyled floor inspired by the classic parquets of traditional European design dating back to medieval times, New Classics Collections flourishes and enjoys a welcomed resurgence.Usually applied with most popular traditional length and width.Can be light color tone with warm or tranquil feel or can be treated with dark stained color,carbonized or handscraped style etc.with an old or morden look.

Star	Structure	Wood Species	Grade	Length(mm)	Width(mm)	Thickness (mm)
5 Star	Solid	Oak ; Maple	AB,ABCD	RL(300-900/1200) 910	90(92,95) 110 120(122,125)	18
4 Star		Birch ; Hickory	AB,ABCD			
3-4Star	3-Layer engineered	Oak ; Maple	AB,ABCD	RL 910/1200	125(122,120)	14/3 2/2;11.2/2(HDF)
4Star	Multi-layer Engineered	Oak ; Maple	AB,ABCD	910 RL(300-1200)	90 (92,95) 120(122,125)	10/0.612/2 14/215/3
3 Star		Birch Hickory	AB,ABCD	910 RL(300-1200)	88 127 166	10/1 12/2

Oak-Chateau Series

Oak is known as its very straight and open grain. It is also hard, heavy wood species. They come in a wide range of colours, from the lighter "shabby" white to the darker antique look.



Oak-42 natural



Oak-43 honey



Oak-44 white base & white brushed



Oak-45 golden


Oak-41 natural



Oak-46 grey



Oak-47 burgundy

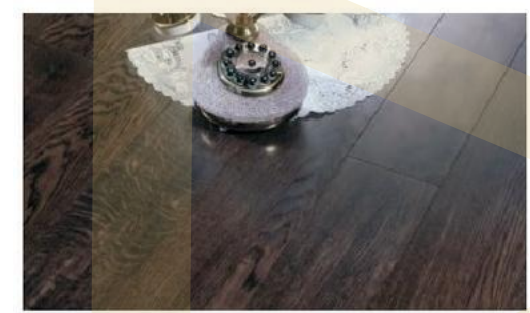

Oak-48 coffee



Oak-49 walnut



Oak-47 coffee



HS-oak-45 golden



HS-oak-48 coffee

HS-oak-44 golden

Maple-Legacy series

Maple texture, with clearly and lightly defined rays, the surfaces are limitless and impressive. It is hard & dense wood with kind of uniform color. Light and pure colors makes it easy to be stained with different colors & styles.



Maple-01 natural



Maple-02 wheat



Maple-03 white



Maple-04 caramel



Maple03 white



Maple-Legacy series

Maple texture, with clearly and lightly defined rays, the surfaces are limitless and impressive. It is hard & dense wood with kind of uniform color. Light and pure colors makes it easy to be stained with different colors & styles.



Maple-06 walnut



Maple-07 molasses



Maple-08 charcoal




HS-Maple-06 walnut



HS-Maple-02 wheat



HS-Maple-04 caramel

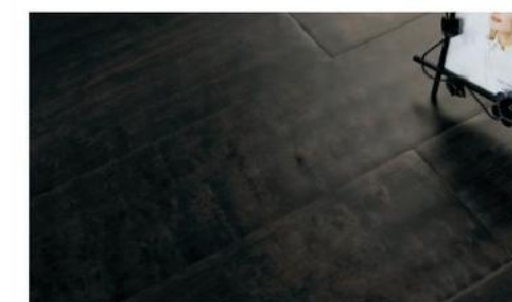

HS-Maple-06 walnut



HS-Maple-07 molasses



Smart series

Hickory and birch,their natural color viration,smooth grain,usually applied stained color with handscraped style.Creating an efect of depth,volume, and velvet-like softness.The gentle color tones over birch and hickory texture translate into a classic and delicate-looking surface.



HS-Birch-01



HS-hickory-01



HS-hickory-02



HS-hickory-03





Exotic Collection

There are six exotic wood species offer vibrant shades of color with grains,some wood are domestic species,the others are imported..Each plank has a Unique grain that pieces together bringing you a floor unlike any other.

Star	Structure	Wood Species	Grade	Length(mm)	Width(mm)	Thickness (mm)
5 Star	Solid	Taun Teak Santos Mahogany	AB	RL(300-900/1200) 910	90(92,95) 10120(122,125)	18
		Acacia Walnut	AB,ABCD	RL(300-900/1200) 910	90(92,95) 120(122,125)	18
4-5 Star	3-Layer engineered	Taun Teak Santos Mahogany Acacia Walnut	AB,ABCD	RL(300-1200) 910	120(122,125)	14/3
4-5 Star	Multi-layer engineered	Taun Teak Santos Mahogany Acacia Walnut	AB,ABCD	RL(300-1200) 910	90(92,95) 120(122,125)	12/2 14/2 15/3



Boutique Acacia series

Acacia floor is well-known by its unique swirling grain patterns and extraordinary color variations. It is one of the hardest wood flooring species options available. Its dynamic looks adds exciting spirit to a home with long-lasting durability as well as an elegant look.




Acacia-01 natural



Acacia-02 golden



Acacia-03 walnut

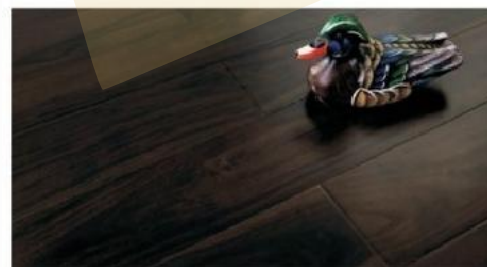

Acacia-04 raven

Acacia-04 raven



HS-Acacia-02 golden



HS-Acacia-03 walnut



HS-Acacia-02 golden



HS-Acacia-03 walnut

KAREEMA FLOOPS 25-26

Royal Catbrier teak series

Catbrier teak is a unique succedaneum of Oak. Its also has a good hardness and glossy wood performance.And it is very resistant to insect and fungal attack because of its high tannin content.



Catbrier teak-04 burma teak



HS-Catbrier teak-02 walnut



HS-Catbrier teak-03 golden



Burma teak,natural

Splendid series

Splendid series have burma teak,taun,santos mohgany, Black walnut etc.Most are imported wood species. Usually applied with natual color or matte lacquer,in order to highlights the unquie wood grain and natural color.



Burma teak,natural



Am.walnut-01 natural



Santos mahogany,natural



Taun-01 merbau



Taun-02 mahogany



Catbrier teak-04 burma teak



Palais Collection

Carefully selected hardwoods with the best grains to create eye-pleasing patterns that transcended time and tradition. Fully made by highly professional and experienced workers, it's a renaissance of time-honored artistry blended with modern performance.

Herringbone and Chevron



Oak-Herringbone Bronzed&brushed



Oak-Chevron



Oak-Herringbone

The floor creates an ambience of timeless elegance.Pair it with regency pieces,both inherited and new,to accentuate the special style.
We work with designers to create the perfect combination of chevron or herringbone patterns to enhance any project.It is a truly unique and updated finish but it's rich with history.

Star	Structure	WoodSpecies	Grade	Length(mm)	Width(mm)	Thickness (mm)
4-5 Star	Solid	Oak-Herringbone	ABC	740	120	18
		Oak-Chevron	ABC	500	120	18
4-5 Star	Mulilayer engineered	Oak-Herringbone	ABC	910	122	15/3
		Oak-Chevron	ABC	780	122	15/3



Wood Parquet



Art Parquet flooring is an artistic expression made from blocks of wood in a variety of geometric patterns-some very simple figures,while others can be sophisticated and difficult to achieve and onlytrue professionals like uscan provideyou.



Accessories



Threshold:
can be used in doorways,at sliding doors, against fireplaces,etc.when abutting joining roomsthat have floors of different heights.



Quarter Round:
can be used along the base of the wallsagainst the wood baseboard to cover the required expansion gap between the flooring andthe wall.



Reducer:
can be used to smoothly taper the edge of the wood floor downto another surface.



T-molding:
can be used as a transition piece between two floors that are of the same height.



Wall Base:
can be a decorative molding that is nailed to the walls on top of the flooring,or it can be used with quarter round.



Stair Nosing:
can be used on the front edge of a step.


Underlayment & Hammer



YKL-RC700



YKL-RF2001



YKL-RF2007



YKL-RF3001



Black Underlayment



YKL-RF3004



YKL-RF5001



YKL-RF8003




YKL-RF8004



Rubber Hammer


Tap&Go Locking System

Preparation

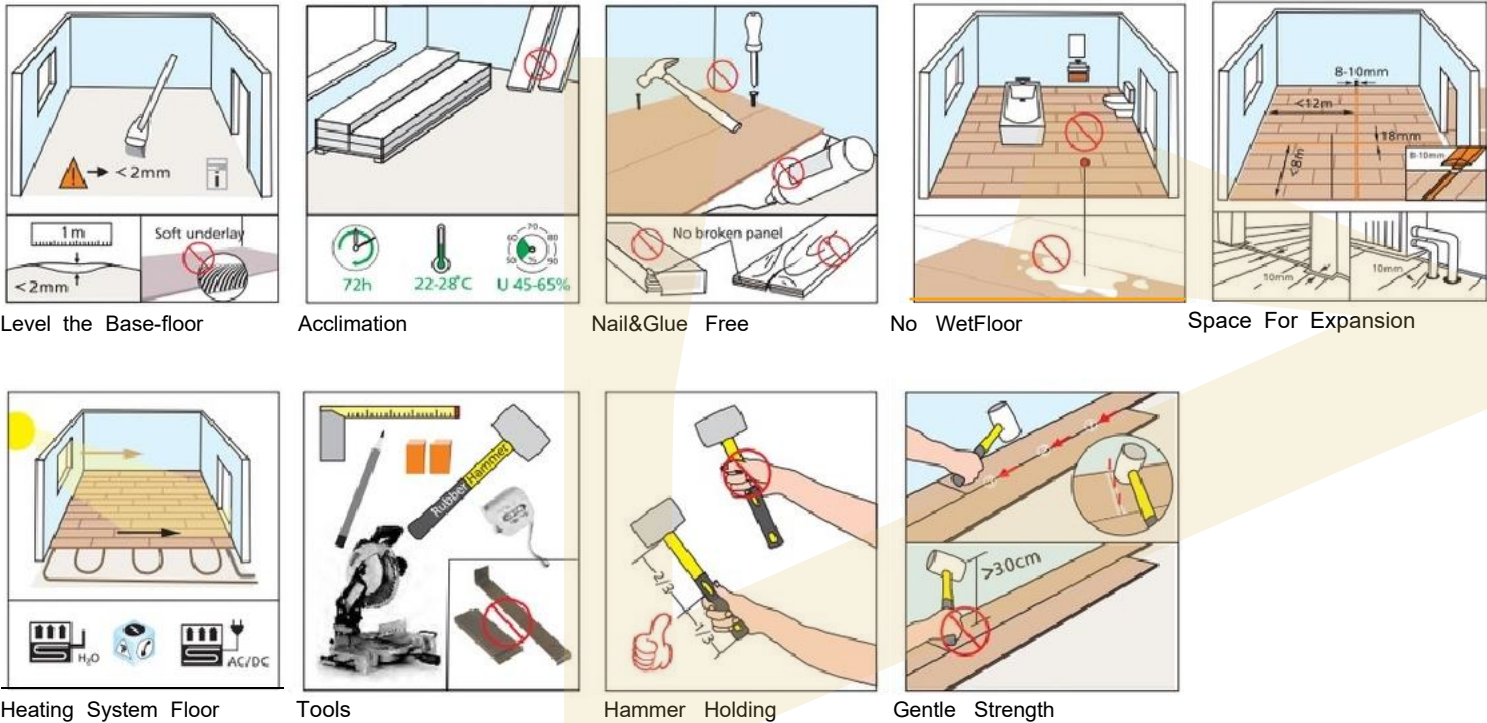

Installation

NOTE: Please examine all the flooring before installing for the colour, finish, quality and style. The manufacturer will not assume any responsibility for the above once the product has been installed.

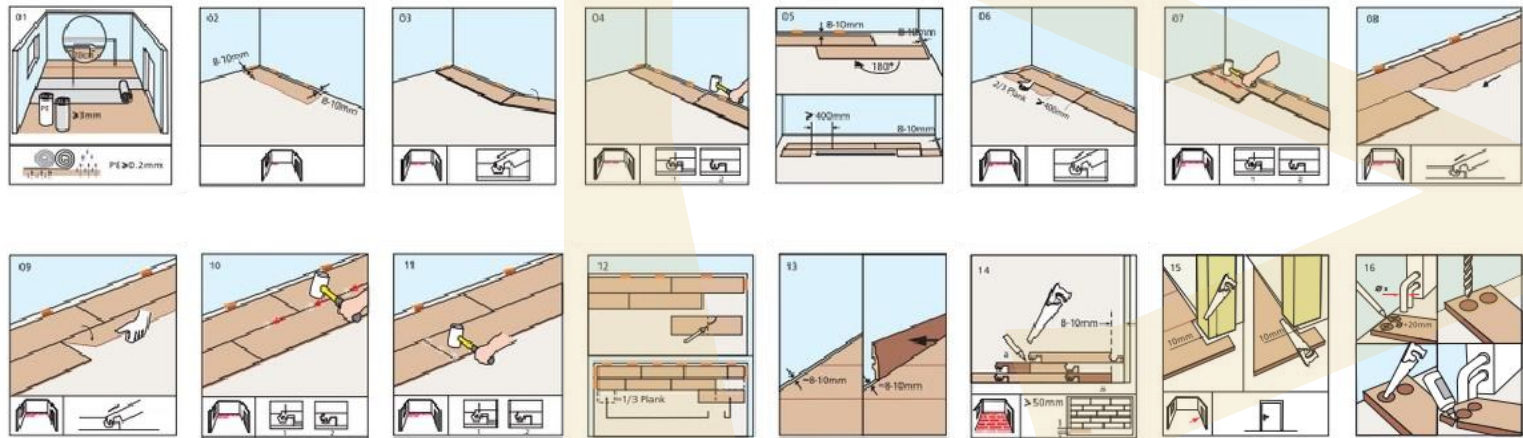

Care and Maintenance



Detailed Care Maintenance Tips:

DO:

- Wipe up liquid or food spills promptly with dry cloth or paper towels.
- Remove sticky residue(like jelly)with a slightly dampened cloth.
- For general cleaning add 1/4 cup of white vinegar to 1 quart of warmwater.
- Daily Cleaning:Remove loose dirt and grit,dust mop,broom sweep,electric broom or vacuum.
- Use interior and exteriordoormats at entrances to collect dirt and moisture and prevent it from being tracked onto the floor.
- Area rugs are recommended in front of kitchen sinks,at al pivot points and within high-traffic areas.The rugs must be made of a breathable material to prevent moisture entrapment.
- Place runners and area rugs(with slip-resistant backings)along high-traffic areas.
- Keep animal nails trimmed to prevent finishscratches.
- To prevent surface damage avoid roling heavy appliances and furniture on the floor.Use plywood hardboard or appliance lits,if necessary.
- Use furniture leg protector pads under all furniture legs.
- Replace hard,narrow furniture rollers with widerubber rollers
- Keep the relative humidity in your home between 45%and65%.
- Protect your floor from direct sunlight.
- Please make sure that the temperature and humidity are moderate in the room.

DON'T:

- Use any of the flowing products(or products similar in nature)on your floor:ammonia based cleaners,acrylic finishes,wax based products,detergents,bleach,polishes and oil soaps,abrasive cleaning soaps or acidic materials such as vinegar.
- Allow water to stand on your for for any length of time-wipe up immediately.
- Walk across your floor in poorly maintained shoes with heel taps,spike heels or with any sharp object protruding from your shoe.
- Allow furniture to rest on the floor on small metal tips or hard domes.
- Use rubber,foam back or plastic mats as they may trap moisture and possibly discolor your floor.
- Use vacuums with beater bars or hardheads.
- Allow "spike heel"type shoes to indent wood floors,especially if the hell tips damaged or has lost its rubber pad.
- Leave your flooring exposed to direct sunlight for long periods of time.

Limited Warranty

- A 25 year Structural Integrity Warranty
- A 5 year finish and wear warranty

These warranties,which begin from the date of purchase,apply to products used in dry residential applications.

Warranty Coverage:

Finish and Wear Warranty--We warrant that tsfnish surface will ot peel off or wear through for the indicated period of time,from the date of purchase.

Structural Integrity Warranty--We warant that these solid bamboo products in their original manufactured conditions are free from defect in material and workmanship including assembly dimension and grading.

These warranties DO NOT COVER damages or defects resulting from or in any way attributed to:

- Improper storage,handling or installation of the products.
- Excessive or inadequate humidity in the area.Relative humidity in the area of use should be within a normal range of 45%-65%.
- Abuse,lack of maintenance,neglect,abnormal use or misuse,negligence,corrosive chemicals and other unintended uses.
- Failure due to structural changes in the sub-lor,the settling of building or uneven sub-floor that has not been adequately leveled.
- Variations in color,markings,patterns,fading or darkening that are naturally occurring or develop over time.
- Damage caused during shipping is the responsibility of the shipping company.
- Dents or scratches.
- Changes in color due to full or partial exposure to sunlight and weather.
- Separations between boards caused by expansion and contract during seasonal and temperature changes.
- Installation or use of flooring with visible defects.

Client Testimony

Selim from USA on Tap&Go Installtation

This is one of the best products we have used in the USA so far.The installation of this flooring is the easiest process as long as you follow the video guide they send you.You do not need professional labor to do the installtion.Any handyman or you yourself caninstall it.If you have any Mexicans working for you,it should not cost you more than \$.50/sq.ft.The only thing is that you have to ensure your surface is even and flat.Even slight variations are not acceptable.The surface must be flat and even.It applies to any hardwood flor.

Also,make sure that you order transition strips and baseboards with your flooring.

Bright is very professional and honest person.He is very reliable and is a pleasure to work with.We highly recommend him and his company.

Fabio from Argentina on Strandwoven bamboo floor

The product is something completely new in the market but is very well accepted.I can say one is tied it is adopted,we are having a continious growth of this ine 25%monthly,people start to talk about strandwoven bamboo floor as the"new wonderful product" Considering the growth of the product I can think we will reach 2 containers/month for 2nd semester next year

Eddy from Rwanda on Oak wood floor

Thank you very much for making this beautiful engineered flooring wood.A good rich looking and a good multilayer structure.The appearance is so beautiful.

Glenn from Canada onAcacai wood floor

So far all the ACACIA wood floor seems to be good quality with no difficulty.The pad is good too.

Bergeim Integrated Manufacturing Base

- *One million acres of modern forestry base,
- *Rebuilding and upgrading 280 thousand square meters of environmentally friendly core production base,*Enlarging 20 million square meters of low-carbon ecotypic flooring manufacturing base
- *Developing one million acres of forestry and industry three-dimensional project
- *Building ten thousand square meters of modern research and development center and ten thousand square meters of modern display center.



The total investment reaches several billion yuan. The production base was built by strictly following international standards ISO19001,ISO140001,CE Authentication and CARB Authentication.

"Bergeim Integrated Manufacturing Base"is an industial model factory integrating garden workshop,ecotypic flats,automatic power-saving manufacturing line,and dustless workshop.



Raw material



siped Bebo



Compressing



Bleached



Carbonized



Packaging



Sanding



4S4



Wire-brush processing



Coating line



Waxing



Wood Flooring Facotry Profile



Raw Material



Compressing



Material After Compressing



Profiling



Wax Sealing



How to Select the Real Valuable Flooring?

Tip1

❑ One piece=The whole flooring

The quality of one piece of flooring is equal to those of the Whole flooring after installation.

☑ One piece≠The whole flooring

Fact:Actually,the quality of one piece of flooring is just one aspect of overall effect of the whole flooring after installation.

The real valuable flooring not only demands single plank is beautiful,healthy and durable,but also requires the whole flooring gap,separation and warp resistant for long-time use after installation.Otherwise it will be easy to getdusty and grow germ in the joint,and no longer keep artistic,healthy or durable.

Tip2

❑Construction quality=Installation quality

☑Construction quality +Floorjoint technology=Installation quality

Fact:The installation technology plays a decisive role especially in heating floor system.Superior joint technology is a key factor in preventing separation and gap problems between the flooring.

Tip3


❑The higher price of floors =The higher purchase cost

☑The purchase cost=Material cost+Installation cost+Usage cost

Fact:The consumers'real purchase cost is hugely influenced by the installation cost and the usage cost like maintenance cost,warranty,psychology feeling,effect to health,etc.



Gap-Resistant

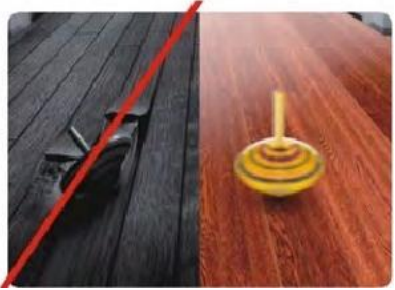

Warp-Resistant



Separation-Resistant


Tap&Go Locking System save more,lve beter

- One of three **world-class** flooring click patent;
- Innovative hook joint structure with **smart groove**,to be installed by vertical tapping along edges of the planks.
- Most Advanced** Locking system,particularly good for**wood and bamboo floors**.

Structure

1.4-side Lock:

The elasticity groove design is applied in both long and short end sides.TAP&GO's special 4 sides'Locking technology ensures the installed floors hard to dispart after installation while other locking floorings are easily apart rom short ends.

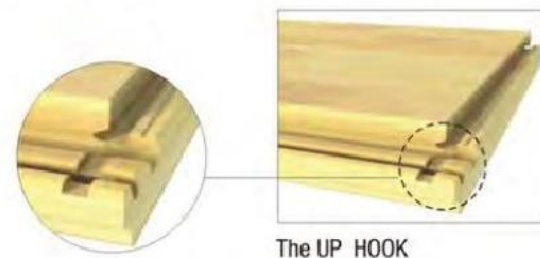


The UP HOOK




The LOW HOOK

2.Drop lock structure:

It is provided for more option to the customer with less tap,especially the DIY home users who have less experience of installation.The combination of the drop lock short sidewith the orginal strong long side sill gives perfect performance on the final installation effect.

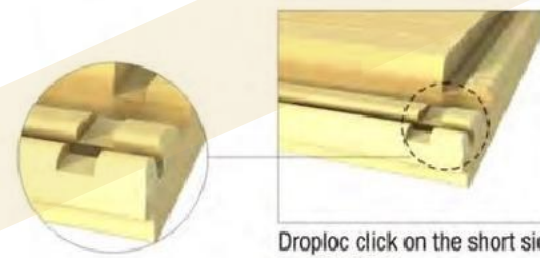

Droploc click on the short side for UP-HOOK

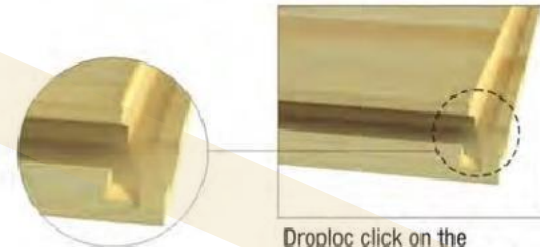

Droploc click on the short side for LOW-HOOK

Advantages



1)Trusted Quality Material

TAP&GO floors adopted high quality raw materials,excellent technology and advanced equipment.



2)Stronger Locking

The wider and deeper design of TAP&GO locking system makes TAP&GO locking much stronger, no loosing or departing.Meanwhile,the intelligent Groove in the up hook is an innovative technology,which enables the hook shrink and expands with good elasticity,and makes planks truly firmly locked together.



3)Easier installation

To be simply installed by tapping-inthe edge of the planks,One person with one rubber mallet is all needed.



4)Eco-Friendly

Low formaldehyde

TAP&GO locking flooring formaldehyde emission rate is far below than thethe normal or low quality ones.Moreover,Tap&Go locking installation requires no glue,which makes the floor more natural and safe.

Tap&Go Flooring Structure



Solid Wood Floor



3 Layer Engineered with Pine core



Multi-layer Engineered with Plywood core



3 Layer Engineered with HDF core

History of Wooden Flooring Joint System



1st of Flooring Connecting Technology — "Beam and block" Connecting Technology



2nd Generation of Flooring Connecting Technology — "Tongue&Groove" Connecting Technology



3rd Generation of Flooring Connecting Technology Horizontal Connecting Technology



4th Generation of Flooring Connecting Technology 3R click Connecting Technology

1950

1996

2006

Generati on	Invented	Joint	Installation			Gap/ Separatio n	Recycle Used	Heating System	Eco-friendly		Application
			Glue/Nail	Kell	Easy				Formseb yde Emission	Bateria/ Dust	
1st G	—	Non	✓	✓	X	>---<	X	X			Solid wood
2nd G	1950	Tongue& Groove	✓	✓	X	>---<	X	★			Solid/Engineered /Bamboo
3rd G	1966	Locking System	X	X	★	>--<	✓	★★			Laminate
4th G	2006	Smart Locking System	X	X	★★	>-<	✓	★★★			Solid/Engineered /Laminate/Bamboo