

# HIGH-END SYSTEM DOORS AND WINDOWS

Tel: +971 56811168 / +971 544771239

Email: info@beitalkareema.com

Add: 5 17A St, Al Khabaisi, Dubai P.O.Box 10776



# LEADING BRAND OF HIGH-END SECURITY DOORS AND WINDOWS

ZEKIN Doors and Windows belongs to DSLS home furnishings technology co., Ltd., which has accumulated rich experience in the field of high-end security doors and windows since its establishment in 2008. With 16 years of professional history, ZEKIN Doors and Windows has built a modern production base of more than 155,000 square meters. From the profile extrusion, surface painting, spraying process, glass tempering, profile assembly and cutting and other systematic intelligent manufacturing links, to ensure that ZEKIN Doors and Windows in product quality, technology and innovation ability of the leading position

The company's products have been exported to dozens of countries and regions such as the United States, Europe, Australia, the Middle East and Singapore,

creating a greener, safer, more comfortable and better living environment for global consumers.

## **PRODUCTION WORKSHOP**



## **EXHIBITION HALL DISPLAY**



## **TEAM STYLE**



### **SECTION EXTRUSION**









## **SURFACE TREATMENT**









### **GLASS PROCESS**









## **PRODUCT ASSEMBLY**










## **EX-FACTORY INSPECTION**







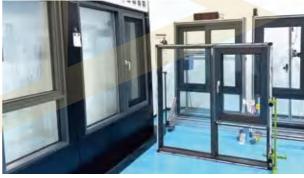

## **PRODUCT PACKAGING**







## **CONTAINER SHIPMENT**



## **QUALITY ESCORT**

ISO 9001:2015 Quality Management system standard SO 14001:2015 Environmental Management system standard



## **EUROPEAN ASSURANCE OF QUALITY**

EU CE certified brand



## WON THE 2023 IF DESIGN AWARD IN GERMANY

The ingenuity of the design shows "Zhen" kung fu



## WON THE MUSE DESIGN SILVER AWARD

Innovative aesthetic design, highly recognized



## **ZEKIN DOORS AND WINDOWS**

186 national patents industry-leading



KAREEMA-11


## STANDARD PRODUCTION AUTHORITY SUPERVISION

ZEKIN Doors and Windows from the quality control standards, production technology, factory inspection standards and other whole process through the national authority unit supervision, calibration, testing qualified, quality assurance.



# STRONG BRAND PRODUCTS ARE EXPORTED TO THE WORLD

With excellent product quality, unique design, popular brand influence, and a strong industrial chain system, ZEKIN doors and Windows occupy a prominent position in the global market, and its products are sold all over the world, winning wide international recognition.

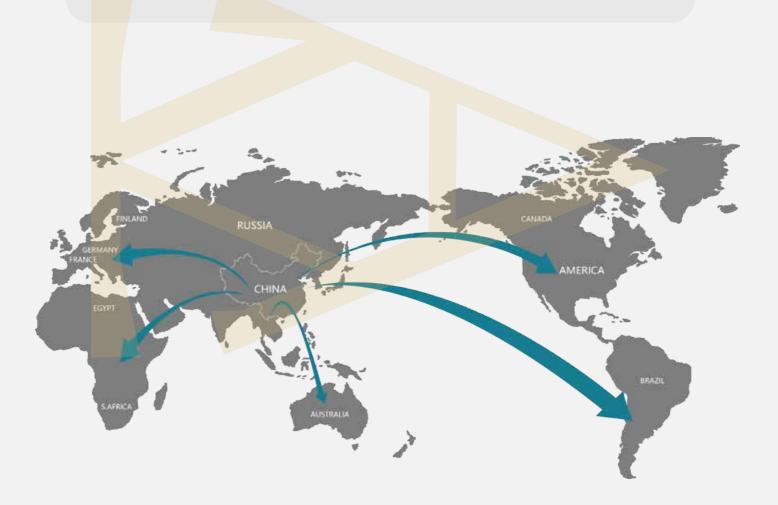

## EXCELLENT CASE APPRECIATION



SIMPLICITY
THE MINIMALIST DESIGN CONCEPT ELIMINATES UNNECESSARY DECORATIONS AND CREATES A PEACEFUL AND COMFORTABLE LIVING SPACE.

CANADA—BUILDING PUBLIC AREA



AMERICA—CLASSIC PUBLIC BUILDINGS



FRANCE—APARTMENT BUILDING



BRITAIN—COMMERCIAL BUILDING



NETHERLANDS—BUSINESS BUILDING







BRAZIL—OFFICE BUILDING



**EGYPT—PUBLIC OFFICE AREA** 

## FIVE PERFORMANCE INDICATORS



## A WIDE RANGE OF PRODUCT LINES



75 SERIES	FOLDING DOOR		18
85 SERIES	FOLDING DOOR		22
90 SERIES	SYSTEM FOLDING DOOR		26
60 SERIES	FOLDING WINDOW		31
83 SERIES	AMERICAN MANUEL LIFTING SLIDING WINDOW		35
55 SERIES	HEAVY AMERICAN MANUEL WINDOW WITH VERTICAL FOLDING		40
SUNROOF	SERIES WITH ELECTRIC OPENING		45
FIXED SKY	LIGHT SERIES		49
100 SERIES	CURTAIN WALL SERIES		52
120 SERIES	CURTAIN WALL SERIES		59
150 SERIES	PANORAMIC SLIDING DOOR		63
50 SERIES	CASEMENT WINDOW WITHOUT BRIDG	GE CUT-OFF	67
75 SERIES	SYSTEM CASEMENT WINDOW		72
100 SERIES	SYSTEM CASEMENT WINDOW		76
65 SERIES	S BROKEN BRIDGE SYSTEM CASEMENT WINDOW		82
87 SERIES	SYSTEM WINDOW		86
103 SERIES	EXTREMELY NARROW SYSTEM WIND	WOO	91
108 SERIES	SYSTEM WINDOW		96
97 SERIES	SYSTEM WINDOW		101
82 SERIES	DOUBLE INWARD OPENING SYSTEM \	WINDOW	105
135 SERIES	SYSTEM FLOATING WINDOW		109
135 SERIES	SYSTEM SLIDING DOOR		114
138 SERIES	ERIES SYSTEM SLIDING WINDOW		118
120 SERIES	ERIES PANORAMIC SLIDING WINDOW		123
118 SERIES	RIES SYSTEM SLIDING WINDOW		127
185 SERIES	IES PANORAMIC LIFTING DOOR		131
155 SERIES	SLIDING DOOR		135
18065 SER	IES HEAVY SLIDING DOOR		139
180100 SERIES HEAVY SLIDING DOOR			143
4516 SERIES CASEMENT DOOR		147	
4516 SERIES EXTREMELY NARROW HANGING SLIDING DOOR		152	
100 SERIES	SUNROOM		157
<b>GLASS SER</b>	RIES		162

## 75 SERIES FOLDING DOOR

### **Technical Parameters:**

Frame thickness: 2.0mm

### Size rang:

Sash width:500mm-900mm Sash height: 1200mm-3500mm

### **Glass specification:**

5+27A+5 double tempered insulating glass

### Heat insulation strip:

14.8mm

### **Product function:**

folding door

### **Product description:**

- 1, Folding design, 100% full opening, effective space saving, more open view
- 2, It adopts tempered hollow glass design, which effectively reduces noise and achieves the best sound insulation effect
- 3, It is equipped with high-quality sliding rails, folds easily and smoothly, and is durable.
- 4, Door hinge are flexible and can be customized according to needs
- 5, It is available in both inside and outside folding options to fit more spaces.

## **HARDWARE** CONFIGURATION




### **PRODUCT ACCESSORIES**







## 75 SERIES FOLDING DOOR

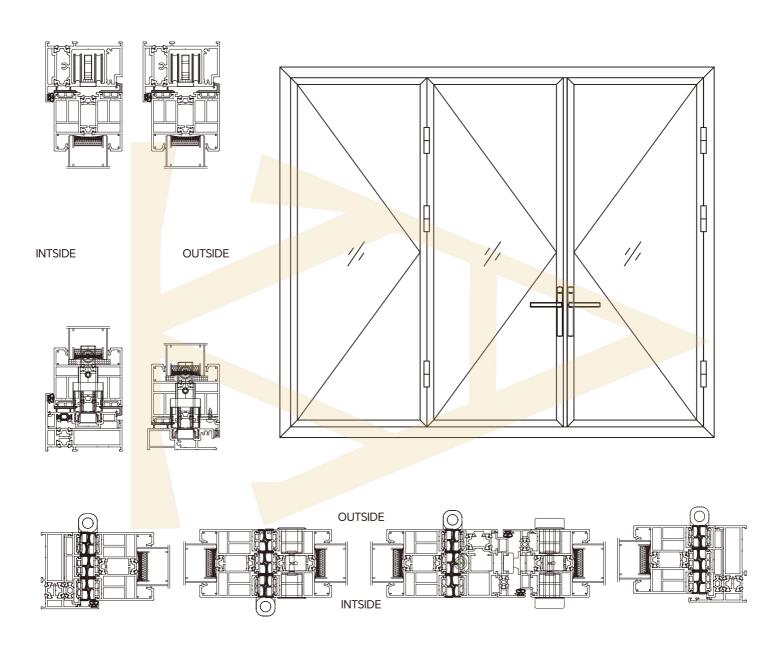

### **75 SERIES FOLDING DOOR METHOD 24 CONFIGURATIONS**

[ODD FOLD +0] 4 KINDS: 1+0, 3+0, 5+0, 7+0

[ODD FOLD + ODD FOLD] 6 KINDS: 1+1, 3+1, 5+1, 3+3, 5+3, 7+1

[EVEN FOLD +0] 4 KINDS: 2+0, 4+0, 6+0, 8+0

[EVEN FOLD + ODD FOLD] 6 KINDS: 2+1, 2+3, 4+1, 4+3, 5+2, 6+1,

[EVEN FOLD + EVEN FOLD] 4 KINDS: 2+2, 4+2, 4+4, 6+2

## 85 SERIES FOLDING DOOR

### **Technical Parameters:**

Frame thickness: 2.0mm

### Size rang:

Sash width:500mm-950mm Sash height: 1200mm-3500mm

### **Glass specification:**

5+20A+5 double tempered insulating glass

### Heat insulation strip:

14.8mm

### **Product function:**

folding door

### **Product description:**

- 1, Multi-folding design with oversized opening, provides a clear and wide view.
- 2, It is equipped with an anti-pinch design for safety and reliability.
- 3, This series can be partially opened or fully expanded as needed for versatile and flexible adjustments
- 4, When closed it provides effective sound insulation and sealing performance.
- 5, It has hidden hinges for better aesthetics
- 6, It is available in both inside and outside folding options to fit more spaces.

## **HARDWARE** CONFIGURATION




### **PRODUCT ACCESSORIES**







## 85 SERIES FOLDING DOOR

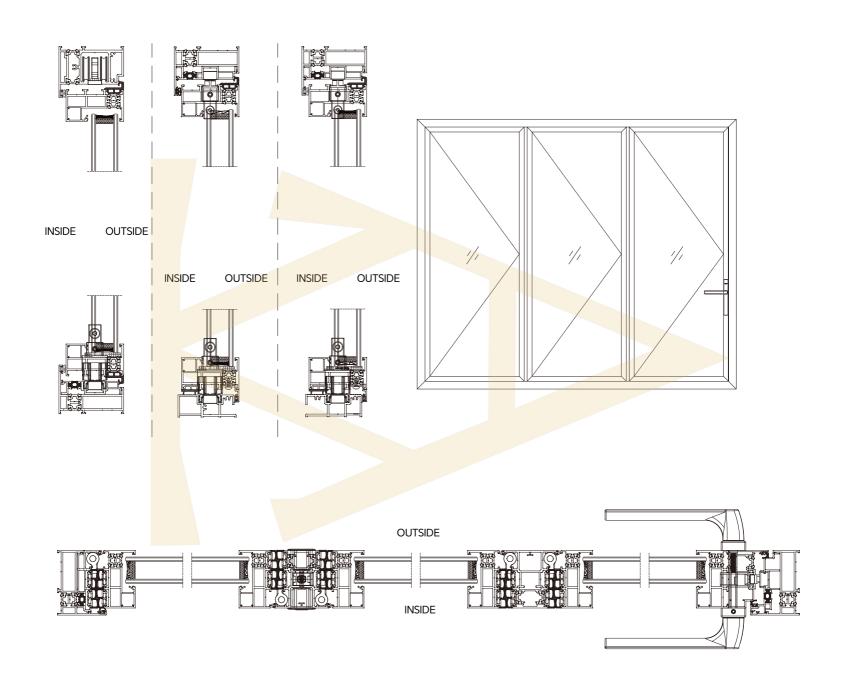

### **85 SERIES FOLDING DOOR METHOD 24 CONFIGURATIONS**

[ODD FOLD +0] 4 KINDS: 1+0, 3+0, 5+0, 7+0

[ODD FOLD + ODD FOLD] 6 KINDS: 1+1, 3+1, 5+1, 3+3, 5+3, 7+1

[EVEN FOLD +0] 4 KINDS: 2+0, 4+0, 6+0, 8+0

[EVEN FOLD + ODD FOLD] 6 KINDS: 2+1, 2+3, 4+1, 4+3, 5+2, 6+1,

[EVEN FOLD + EVEN FOLD] 4 KINDS: 2+2, 4+2, 4+4, 6+2

## 90 SERIES SYSTEM FOLDING DOOR

### **Technical Parameters:**

Frame thickness: 2.0mm

### Size rang:

Sash width:500mm-950mm Sash height: 1200mm-3500mm

### **Glass specification:**

5+27A+5 double tempered insulating glass

### Heat insulation strip:

24mm


### **Product function:**

Folding door


### **Product description:**

- 1, Folding design, 100% full opening, effective space saving, more open view
- 2, It adopts tempered hollow glass design, which effectively reduces noise and achieves the best sound insulation effect
- 3, It is equipped with high-quality sliding rails, folds easily and smoothly, and is durable.
- 4, Door hinge are flexible and can be customized according to needs
- 5, It is available in both inside and outside folding options to fit more spaces.

## **HARDWARE** CONFIGURATION

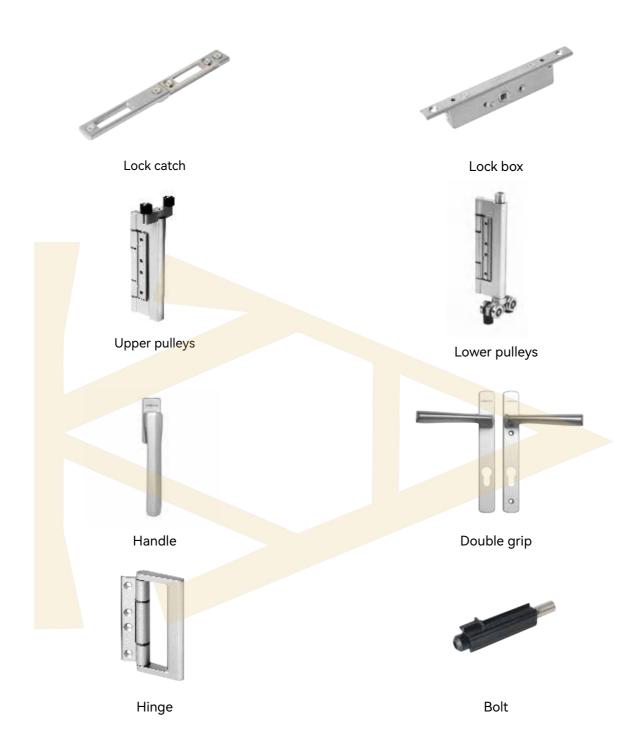

### **PRODUCT ACCESSORIES**

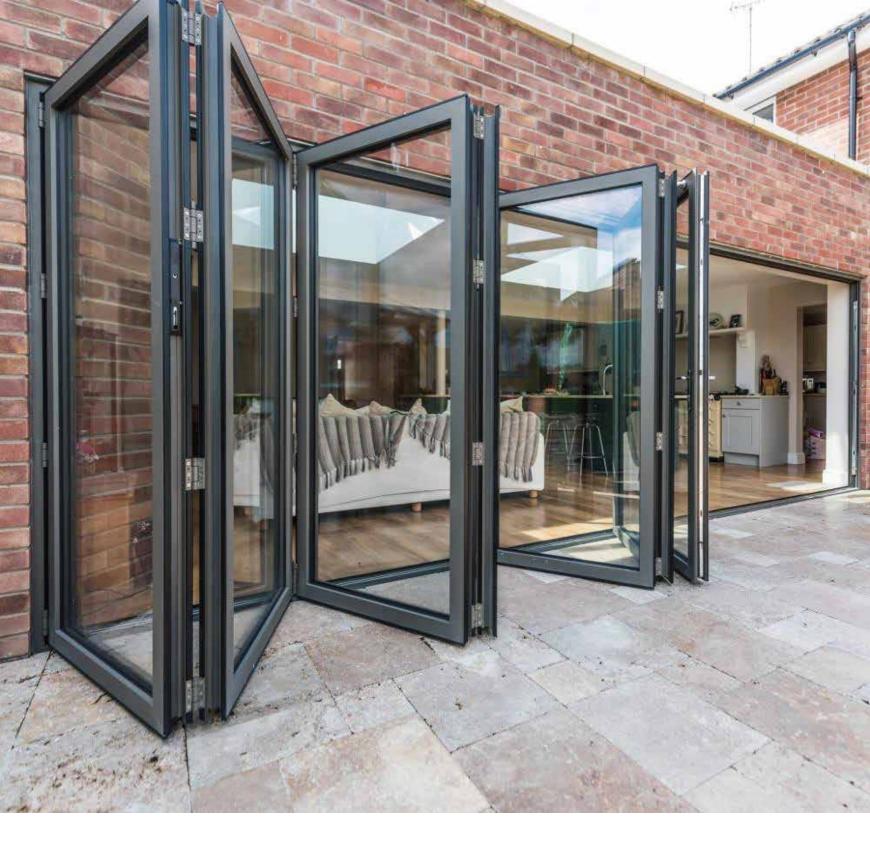

Delicate

Exquisite carving and perfect structure create a beautiful landscape in the space.










PRODUCT DETAILS

HIGH-END SYSTEM DOORS AND WINDOWS

## 90 SERIES SYSTEM FOLDING DOOR

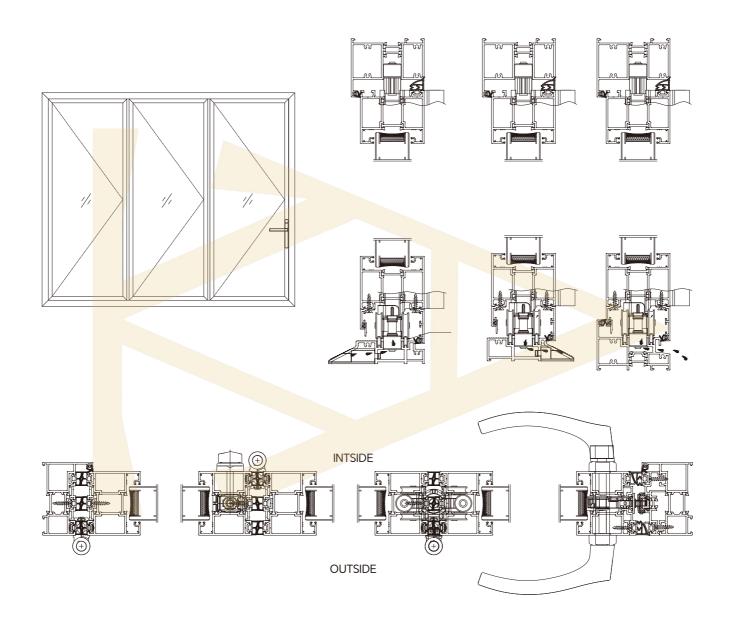

### 90 SERIES FOLDING DOOR FOLDING METHOD 10 CONFIGURATIONS

[ODD FOLD +0] 4 KINDS: 1+0, 3+0, 5+0, 7+0

[ODD FOLD + ODD FOLD] 6 KINDS: 1+1, 3+1, 5+1, 3+3, 5+3, 7+1



### **Technical Parameters:**

Frame thickness: 2.0mm

Size rang:

Sash width: 500mm-800mm Sash height: 500mm-1400mm

### Glass specification:

5+20A+5 double tempered insulating glass

### Heat insulation strip:

20mm

### **Product function:**

folding window

### Product description:

- 1,Left and right can be freely folded, larger opening angle, better viewing and ventilation effect
- 2, Roller screens can be selected to meet the needs of mosquito protection and glare blocking.
- 3. Bridge cut-off design, has better heat and sound insulation, and can reach more energy-saving and environmental protection
- 4, Outer flat frame design drives no water and dust accumulation


## **HARDWARE** CONFIGURATION



Automatic latch+Transmission box

### **PRODUCT ACCESSORIES**



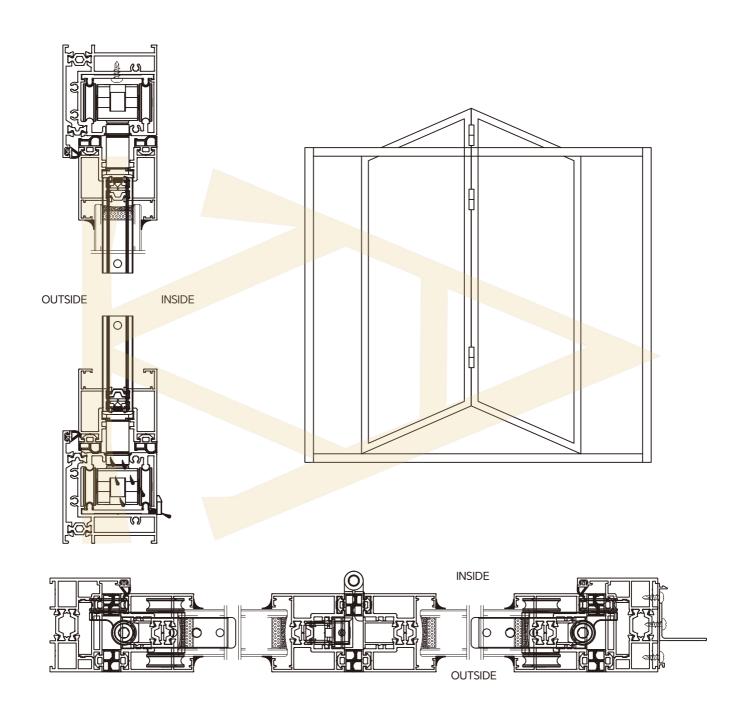

### **60 SERIES FOLDING WINDOW FREE FOLDING METHOD 7 CONFIGURATIONS**

[EVEN FOLD +0] 4 KINDS: 2+0, 2+2, 2+2+2, 2+2+2+2 +2 [EVEN FOLD + ODD FOLD] 3 KINDS: 2+1, 2+2+1, 2+2+2+1

# 83 SERIES AMERICAN MANUEL LIFTING SLIDING WINDOW

Technical Parameters:	
Wall thickness; 1.5mm	
Material:	
Aluminum alloy	
Opening mode:	
Lift up and down	
Accessories:	
Coil spring	
Product function:	
Folding Window	
Section width:	
83mm	
Maximum area:	
Single glass 2.2m²; Double glass 1.6m²	
Width limit:	
Single glass ≤2.5 meters; Double glass ≤2.5 m	
Height limit:	
Single glass ≤1.8 m; Double glass ≤1.8 m	
Productido estation	

### Product description:

- 1, When in the closed state, the frame wraps the sash design will be more stable, have higher wind pressure resistance.
- 2, Double-sided locking design for better sealing performance when closed.
- 3, When opened, the lift-pull sash design does not take up space in the room and provides better ventilation.
- 4. Bridge cut-off design, has better heat and sound insulation, and can reach more energy-saving and environmental protection
- 5, Nylon spring hardware drives smooth and effortless lifting and pulling.

# **HARDWARE** CONFIGURATION




# **PRODUCT ACCESSORIES**







# 83 SERIES AMERICAN MANUEL LIFTING SLIDING WINDOW

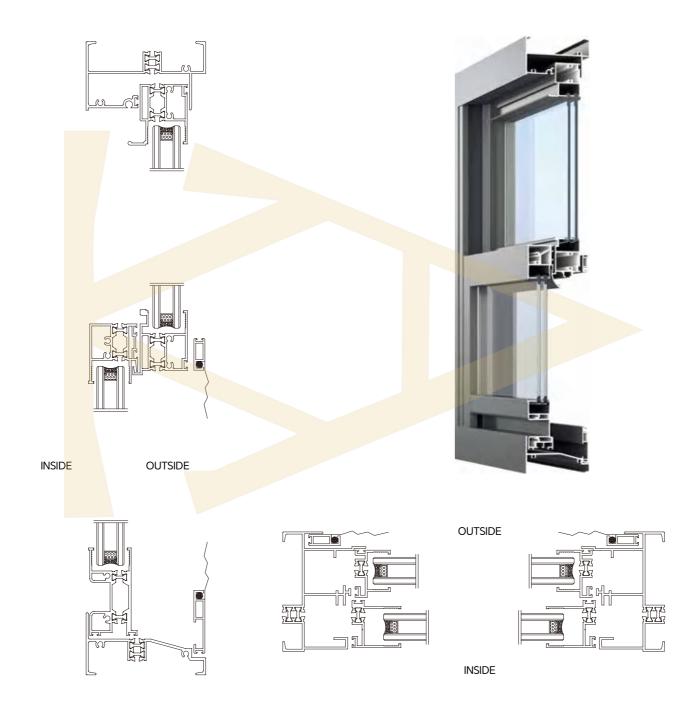

# 55 SERIES HEAVY AMERICAN MANUEL WINDOW WITH VERTICAL FOLDING

#### **Technical Parameters:**

Wall thickness 1.2mm

#### Material:

Aluminum alloy

# Opening mode:

Upholding handle to stop and sliding window

#### **Accessories:**

Coil spring

# Section width of profile:

55mm

#### Maximum area:

7 square meters of single glass; Double glass 3.5 m

#### Width limit:

Single glass  $\leq 3$  meters; Double glass  $\leq 3$  meters

# Height limit:

Single glass ≤ 2.8 meters; Double glass ≤ 2.8 meters

- 1, Small wall occupation design, meets the needs of more thinl wall thickness
- 2, Roller screens can be selected to meet the needs of mosquito protection and glare blocking.
- 3, Upper and lower folding opening design has a larger opening angle for better viewing and ventilation.
- 4, That this series is made of 6063 profiles, which has high quality, and is strong, durable, corrosion resistant.

# **HARDWARE** CONFIGURATION



# **PRODUCT ACCESSORIES**






Delicate

Exquisite carving and perfect structure create a beautiful landscape in the space.

# 55 SERIES HEAVY AMERICAN MANUEL WINDOW WITH VERTICAL FOLDING

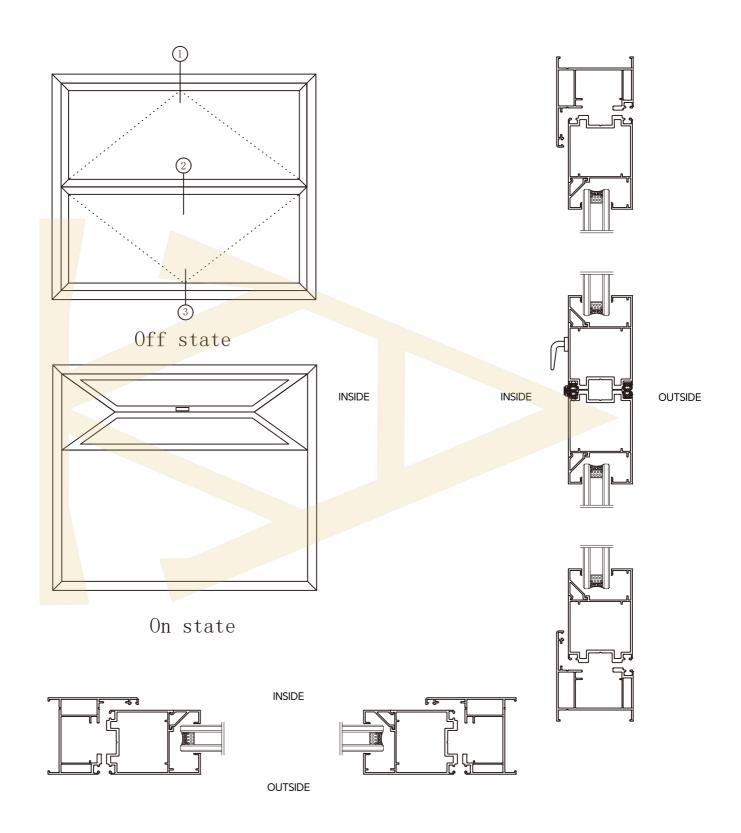

# SUNROOF SERIES WITH ELECTRIC OPENING

#### **Technical Parameters:**

Frame thickness: 1.4mm Reinforced thickness: 2.8mm

# Size rang:

Sash width:600mm-1500mm Sash height:500mm-1000mm

#### **Glass specification:**


5+27A+5 double tempered insulated glass

## **Product description:**

1,Laminated hollow glass can be selected, and its sound insulation and heat insulation effect is better


- 2, PVB laminated technology, has high efficiency UV isolation, while enhancing the impact resistance shock absorption function, effectively isolate the danger of falling objects.
- 3, Two rubber strips in the opening position, effectively prevent rainwater intrusion, and has better sealing effect.
- 4, Extended flange design at the opening position, effectively blocks rainwater and dust intrusion.

# **HARDWARE** CONFIGURATION

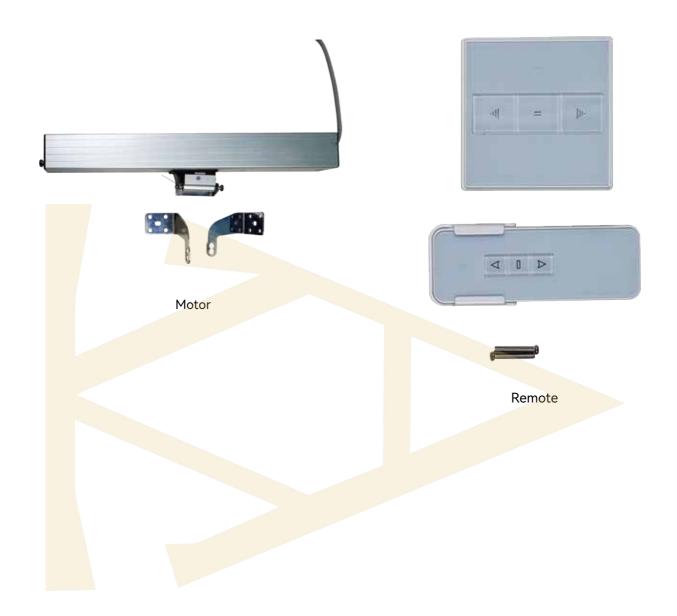

# **PRODUCT ACCESSORIES**

# SUNROOF SERIES WITH ELECTRIC OPENING

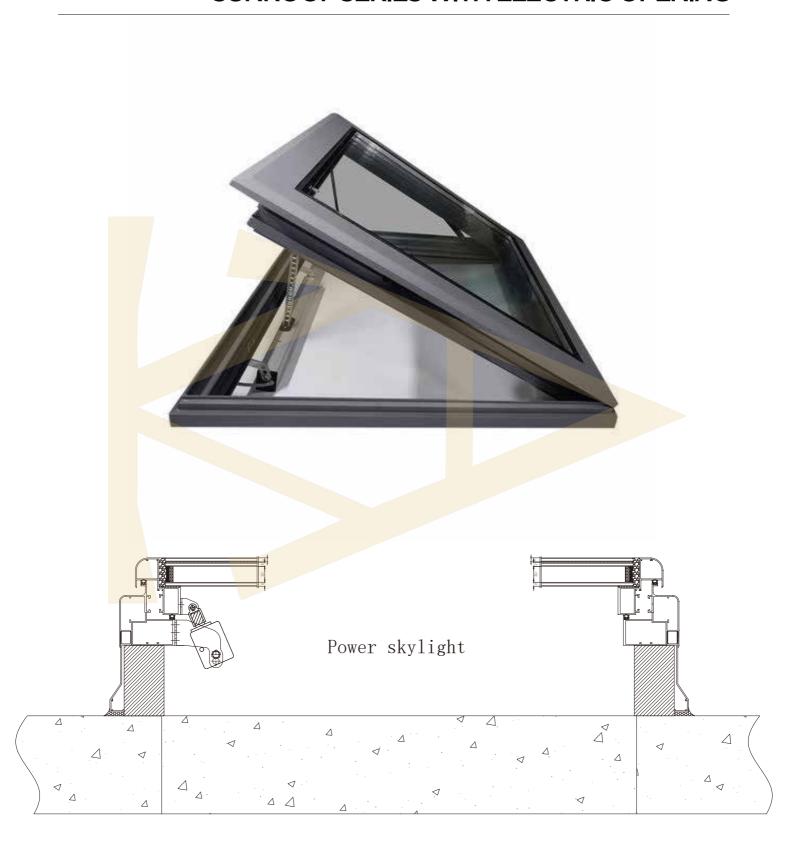



# HIGH-END SYSTEM DOORS AND WINDOWS

# FIXED SKYLIGHT SERIES

#### **Technical Parameters:**

Frame thickness: 1.5mm

# Size rang:


Sash width:500mm-1500mm Sash height: 500mm-1500mm


#### **Glass specification:**

5+27A+5 double tempered insulated glass

- 1, That this series is made of 6063 profiles, which has high quality, and is strong, durable, corrosion resistant.
- 2, 5+27A+5 double-layer hollow tempered glass, its transmission performance is better, more safe and stable
- 3, 27A large hollow design, its sound insulation and heat insulation performance is better.
- 4, Outer flat frame design drives no water and dust accumulation

# FIXED SKYLIGHT SERIES

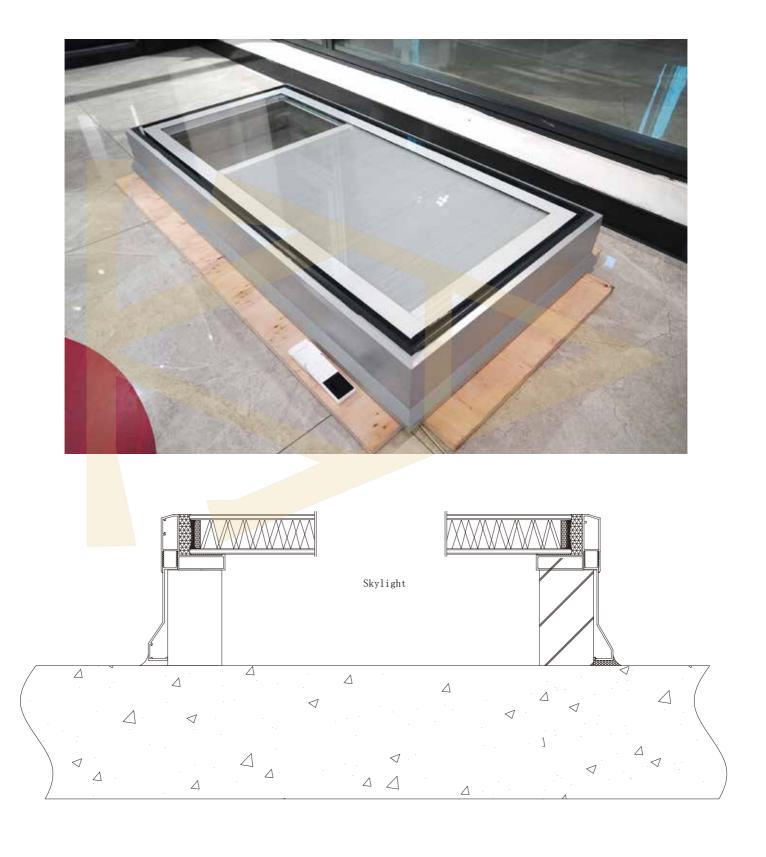

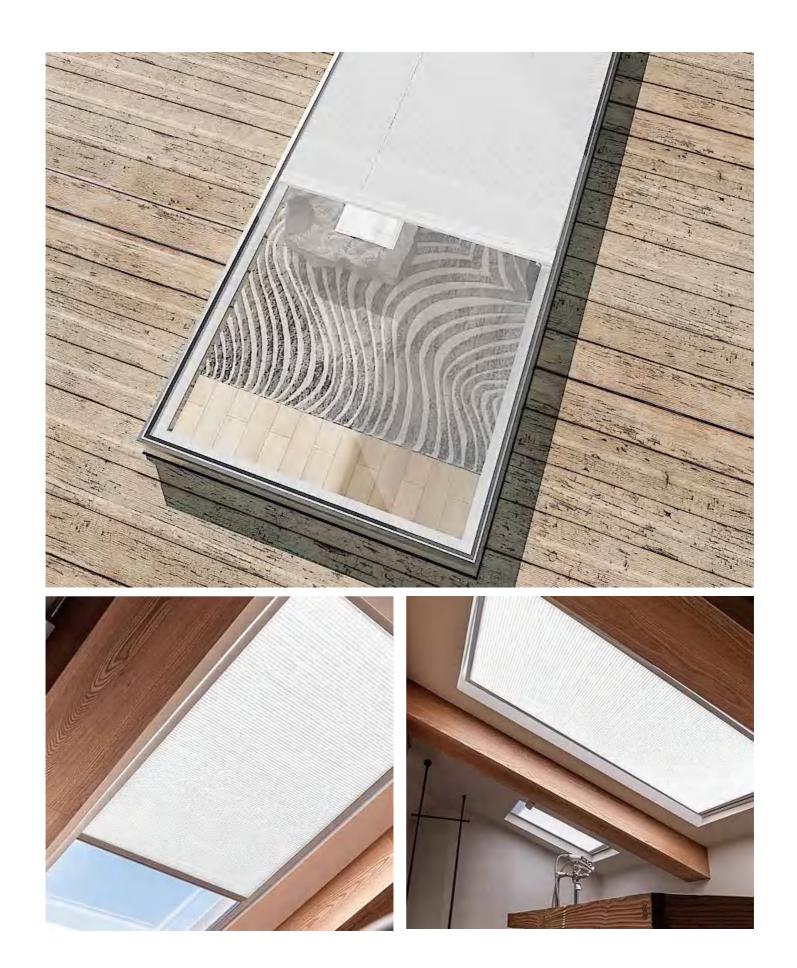

HIGH-END SYSTEM DOORS AND WINDOWS

# **100SERIES CURTAIN WALL SERIES**

#### **Technical Parameters:**

Frame thickness: 2.0mm

#### Size rang:


Sash width: 450mm-750mm Sash height: 750mm-1400mm

# Glass specification:

6+12A+6 double tempered insulated glass

- 1, Open frame, hidden frame, semi-hidden frame design, can meet a variety of user needs
- 2, That this series is made of 6063 profiles, which has high quality, and is strong, durable, corrosion resistant.
- 3, Standard 6+12+6 double-layer hollow tempered glass, is safer, more stable
- 4, 2.0 wall thickness, load-bearing, wind pressure resistance is stronger

# **100SERIES CURTAIN WALL SERIES**

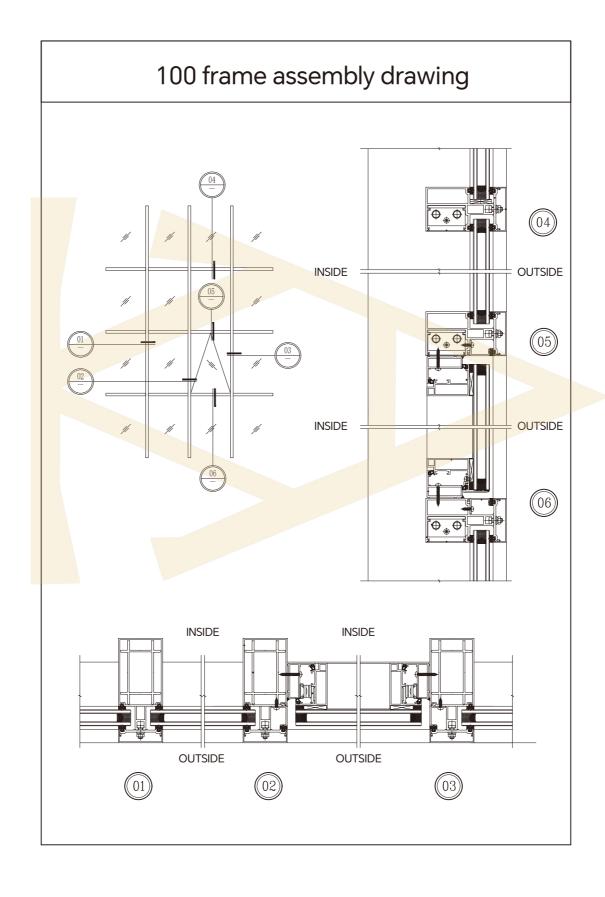







# CURTAIN WALL

High-end
High quality doors and windows
provide you with more choices,
allowing you to live without boundaries, feel the fresh air from nature,
soothe your soul, and enjoy comfort.





# ASSEMBLY DRAWING OF THE 100 SERIESHIDDEN FRAME

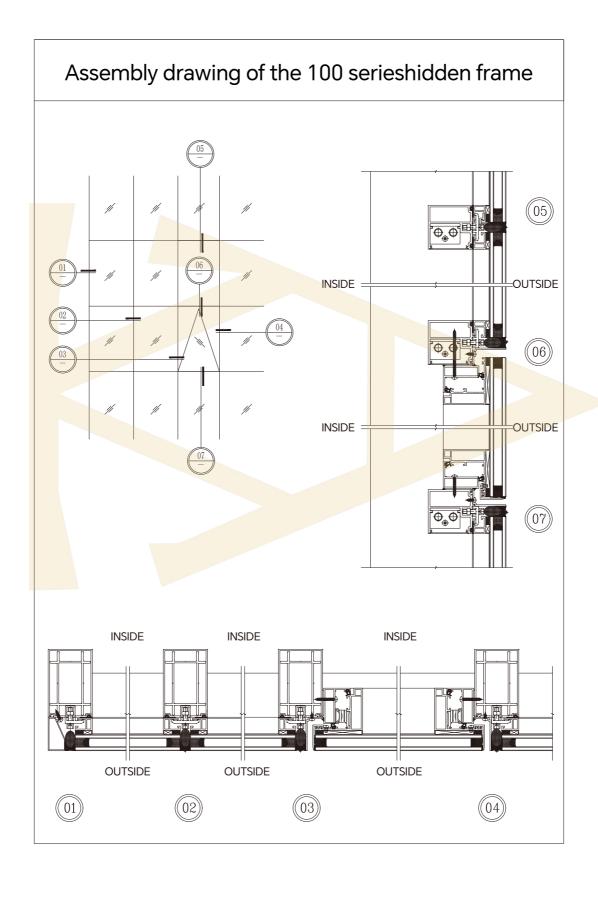



# HIGH-END SYSTEM DOORS AND WINDOWS



# 120SERIES CURTAIN WALL SERIES

#### **Technical Parameters:**

Frame thickness: 3.0mm

# Size rang:


Sash width: 450mm-750mm Sash height: 750mm-1400mm

#### **Glass specification:**

6+12A+6 double tempered insulated glass

- 1, Open frame, hidden frame, semi-hidden frame design, can meet a variety of user needs
- 2, That this series is made of 6063 profiles, which has high quality, and is strong, durable, corrosion resistant.
- 3, Standard 6+12+6 double-layer hollow tempered glass, is safer, more stable
- 4, 3.0 wall thickness, load-bearing, wind pressure resistance is stronger

# 120SERIES CURTAIN WALL SERIES

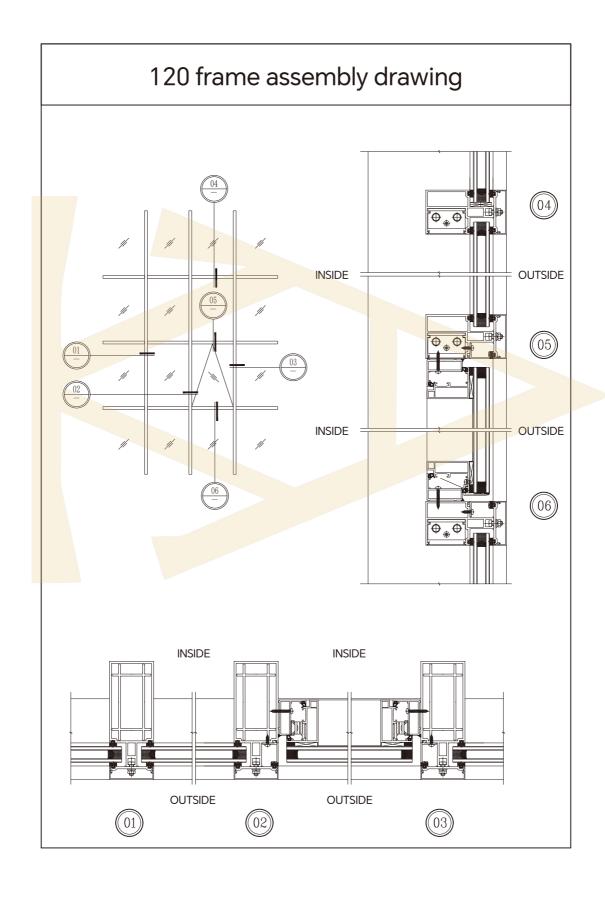






# CURTAIN WALL

High-end
High quality doors and windows
provide you with more choices,
allowing you to live without boundaries, feel the fresh air from nature,
soothe your soul, and enjoy comfort.





# 150SERIES PANORAMIC SLIDING DOOR

#### **Technical Parameters:**

Frame thickness: 2.0mm

#### Size rang:


Sash width:600mm-5000mm Sash height:800mm-3500mm

# **Glass specification:**

5+27A+5 double tempered insulated glass

- 1, Micro-seam lower track design, compared with the traditional sliding track is more beautiful, and has better drainage performance
- 2, When in the closed state, the frame wraps the sash design will be more stable, have higher wind pressure resistance.
- 3,Double rows of customized stainless steel pulleys, with a load capacity of up to 1500kg for a single door.
- 4, Opening method can be selected by remote control motorized control
- 5, This series can be realized in the middle is fixed and both sides are sliding, or two sides are fixed and the middle is sliding
- 6. the thickness of frames is only 19mm, and has a wider view

# 150 SERIES PANORAMIC SLIDING DOOR

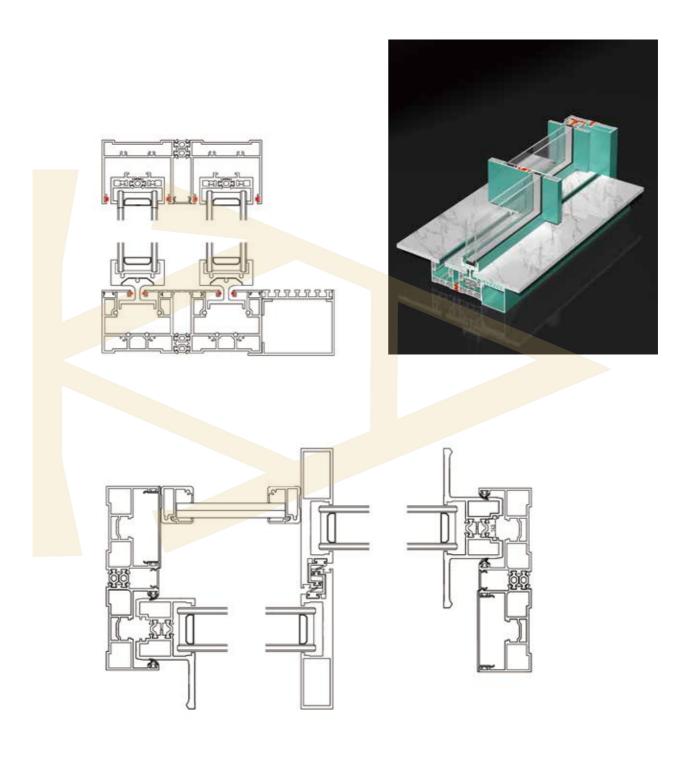



Delicate
Exquisite carving and perfect structure create a beautiful landscape in the space.

# HIGH-END SYSTEM DOORS AND WINDOWS



# 50 SERIES CASEMENT WINDOW WITHOUT BRIDGE CUT-OFF

#### **Technical Parameters:**

Frame thickness: 1.8mm Reinforced thickness: 2.0mm

#### Size rang:

Sash width: 450mm-750mm Sash height: 750mm-1400mm

#### **Glass specification:**

5+15A+5 double tempered insulating glass

# **Heat insulation strip:**


Profile:thickness 1.8mm

#### **Product function:**

Outward opening window waning

- 1, 45 degree corner cleat with glue injection design has stable structure, elegant and smooth appearance lines
- 2, The sash is designed with beveled lines, revealing a sense of aesthetic design in fashionable simplicity.
- 3, Stainless steel load-bearing hardware, has safe and stable without deformation performances, and long service life
- 4, Standard 6+12A+6 hollow tempered glass, has good sound insulation, heat insulation, and better safety

# **HARDWARE** CONFIGURATION

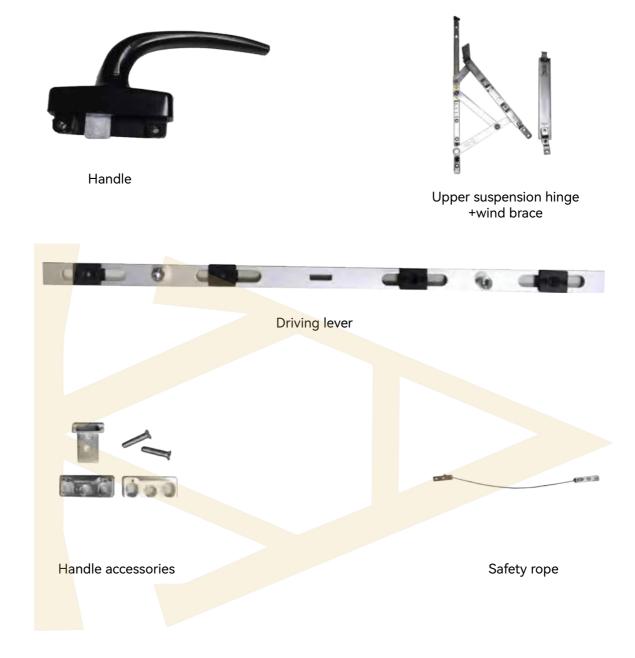

# **PRODUCT ACCESSORIES**



# ZEKIN®


High quality doors and windows provide you with more choices, allowing you to live without boundaries, feel the fresh air from nature, soothe your soul, and enjoy comfort.

# HIGH-END SYSTEM DOORS AND WINDOWS





# 50 SERIES CASEMENT WINDOW WITHOUT BRIDGE CUT-OFF

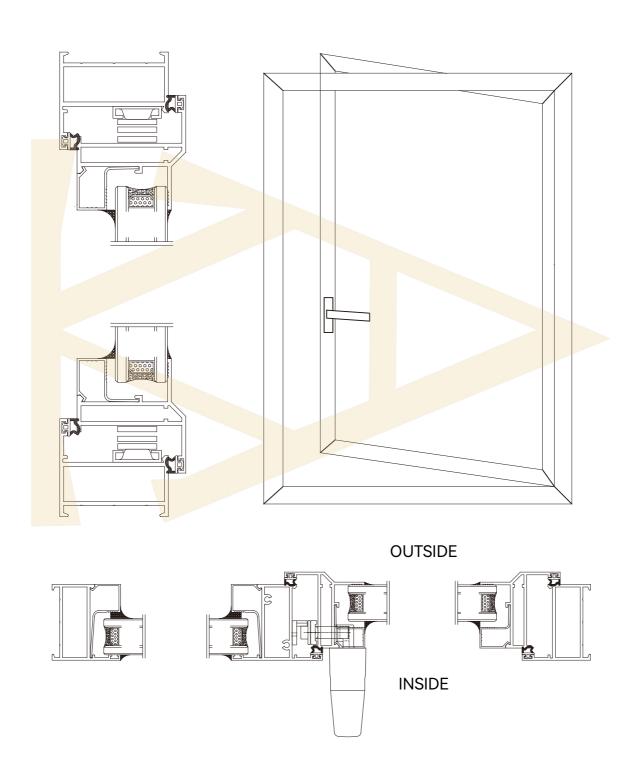

# 75 SERIES SYSTEM CASEMENT WINDOW

#### **Technical Parameters:**

Frame thickness: 1.8mm

#### Size rang:

Sash width: 450mm-750mm Sash height: 750mm-1400mm

#### **Glass specification:**

5+20A+5 double tempered insulating glass


#### **Heat insulation strip:**

Profile:thickness 1.8mm

#### **Product function:**


Outward opening window awning


- 1. aesthetics design with simple smooth lines, to enhance the high-end taste
- 2. The window sash adopts a narrow edge design, which reduces the obstruction of the field of view, and has larger field of view space.
- 3, Concealed drainage system, hidden drainage holes enhances aesthetics, while enhances the effect of wind and tsunami prevention.
- 4, Window and screen are integrated, and at the same time it has better ventilation and anti-mosquito performance

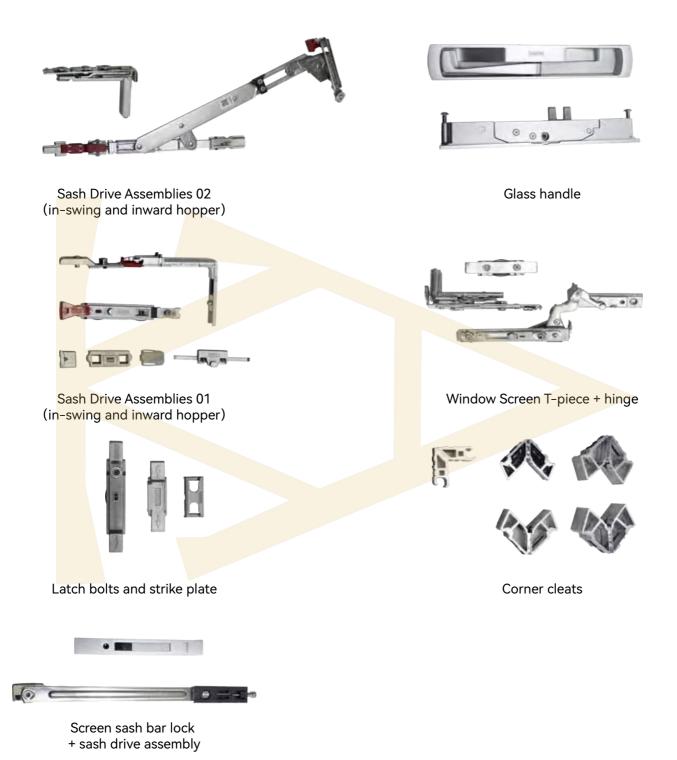

# HIGH-END SYSTEM DOORS AND WINDOWS



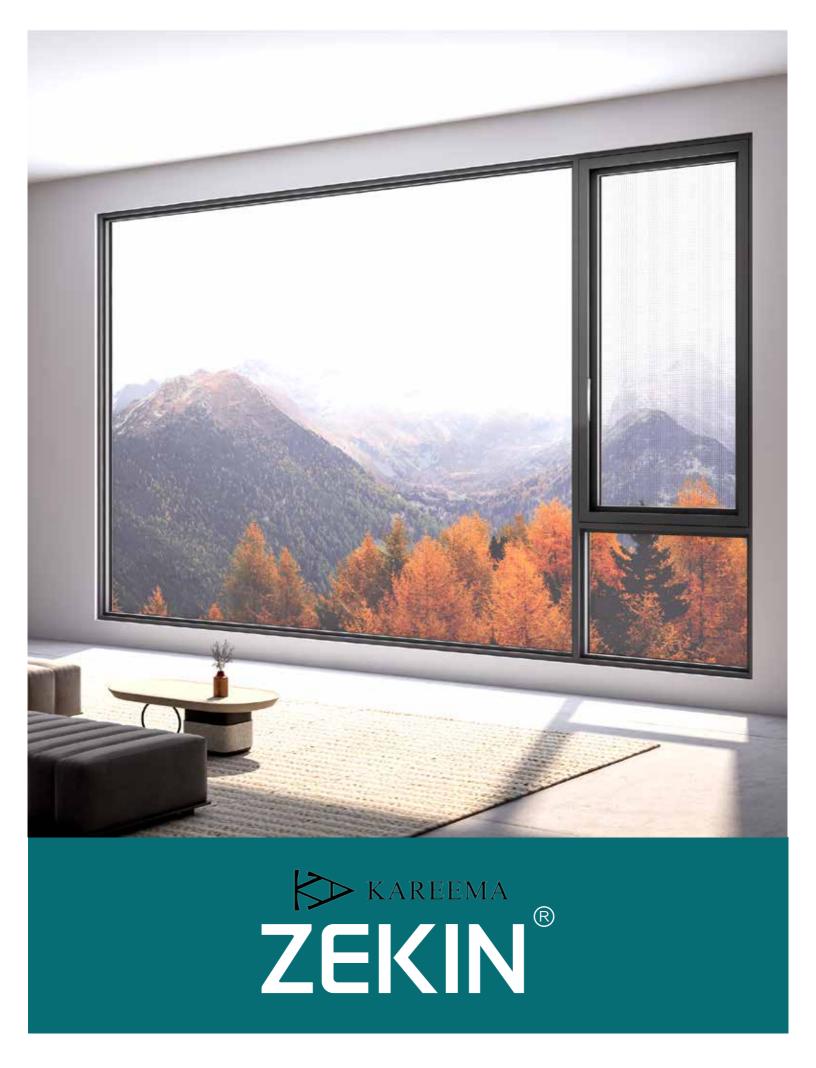

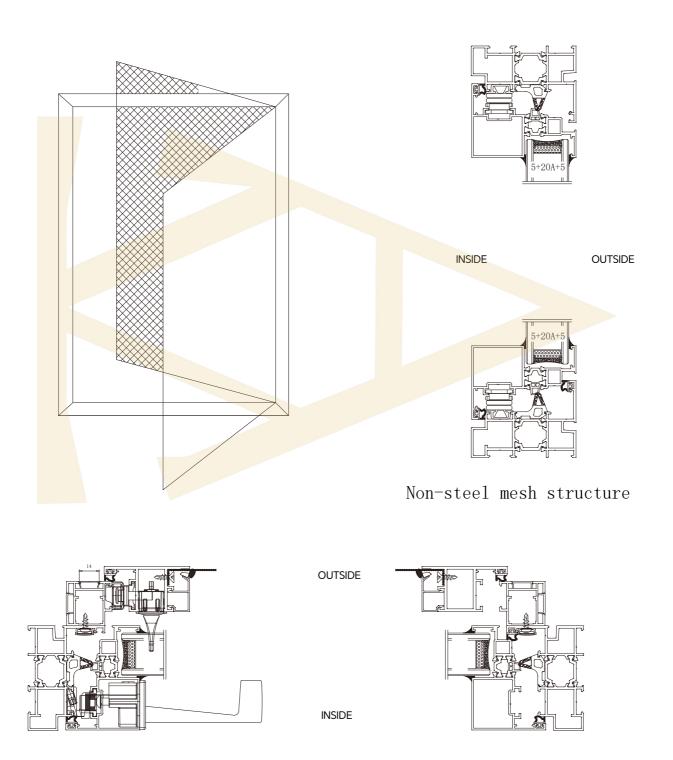

Steel gauze structure

#### 100 SERIES SYSTEM CASEMENT WINDOW

#### **Technical Parameters:**

Frame thickness:1.8mm Reinforced thickness:1.8mm

#### Size rang:

Sash width:500mm-750mm Sash height: 800mm-1400mm

#### **Glass specification:**

5+20A+5 double tempered insulating glass

#### **Heat insulation strip:**

26mm

#### **Product function:**

Outward opening window wwning

#### **Basic parameters:**



Insulation performance: Level 6



Wind pressure resistance performance:





Watertightness performance: **Level 6** 



Sound insulation performance:


Level 4




Airtightness coefficient:


Level 4

- 1, Reinforced wall thickness design has higher safety performance, higher wind pressure resistance
- 2, Split balanced Angle code injection process, improve the wind pressure resistance of the whole window and the overall safety performance
- 3. 20A hollow thickness effectively improves sound insulation, heat preservation and thermal insulation properties
- 4, Selected imported brand hardware, has quality assurance, longer lasting and durable

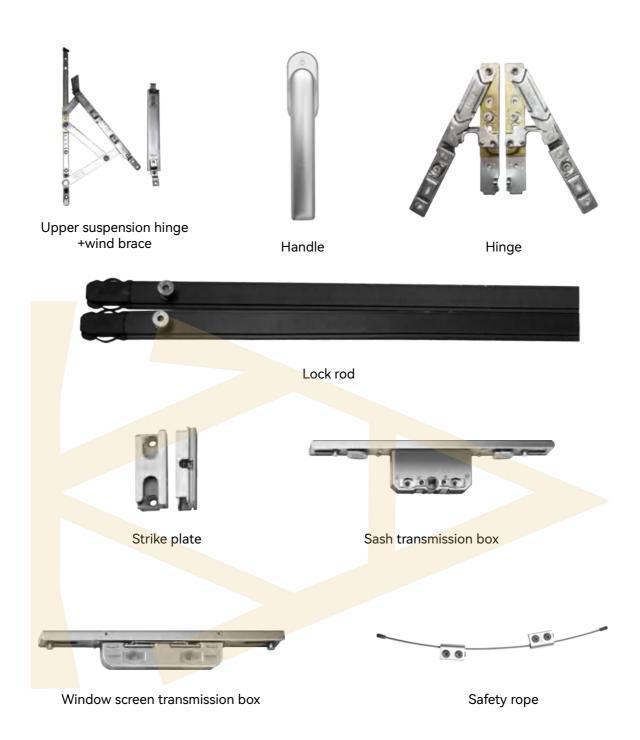


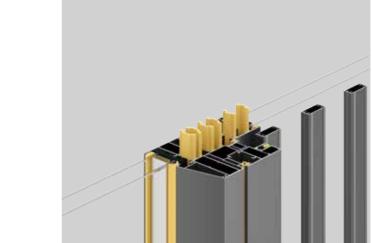



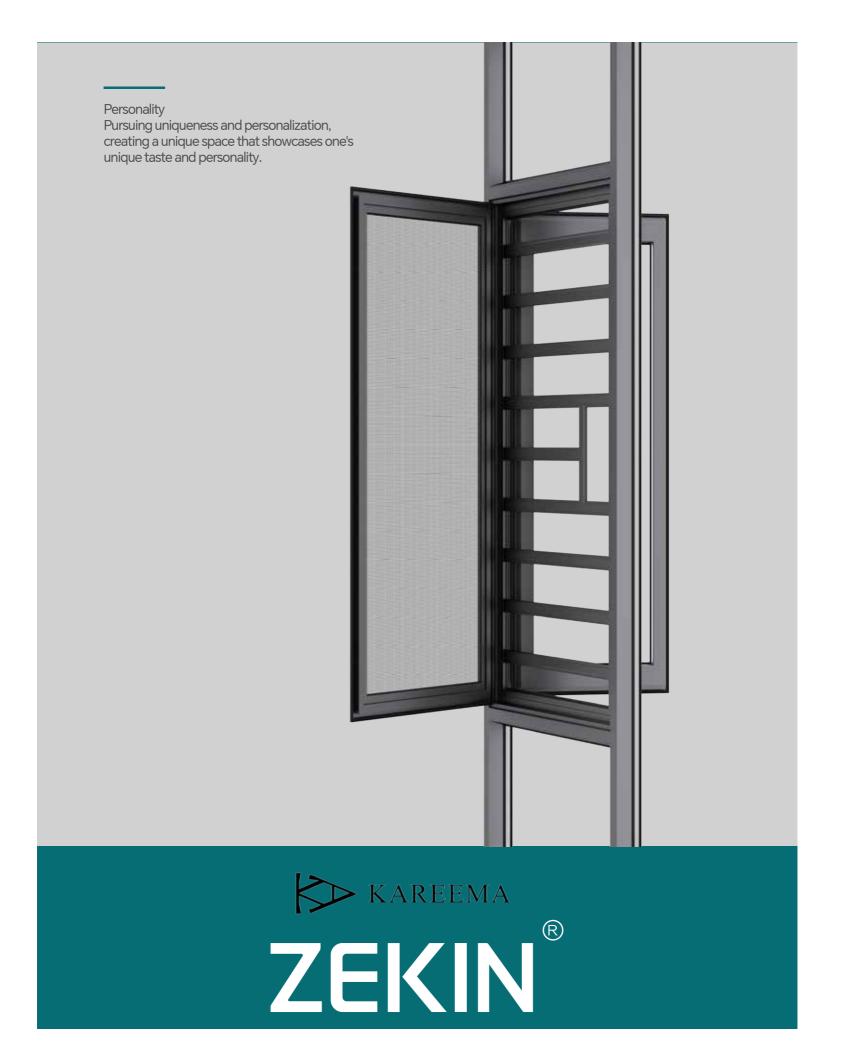

# 100 SERIES SYSTEM CASEMENT WINDOW

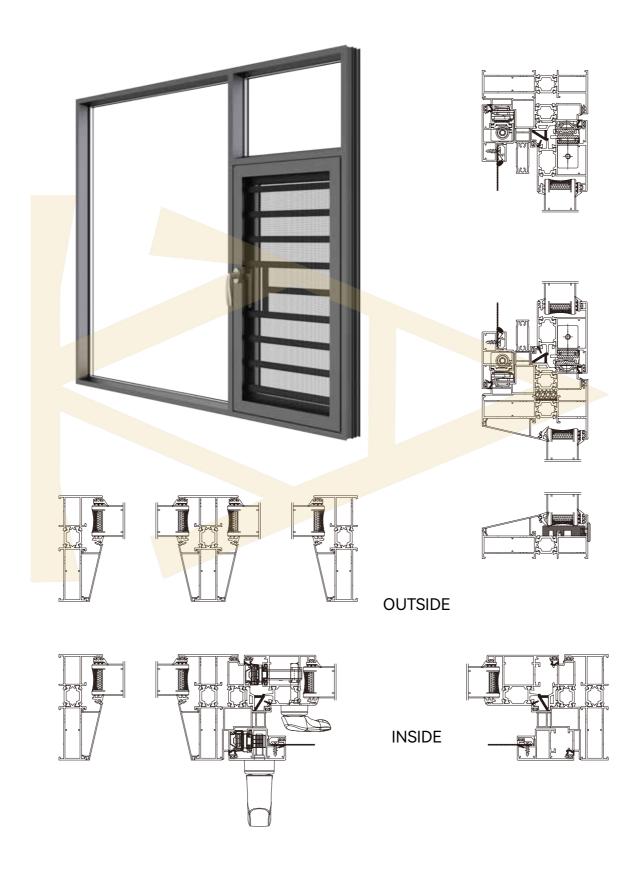

### 65 SERIES SYSTEM CASEMENT WINDOW WITH BRIDGE CUT-OFF

#### **Technical Parameters:**

Frame thickness:1.8mm Reinforced thickness:1.8mm

#### Size rang:

Sash width:500mm-750mm Sash height: 800mm-1400mm

#### **Glass specification:**

5+20A+5double tempered insulating glass

#### Heat insulation strip:

22mm

#### **Product function:**

Inward opening window/door; outward window/door

#### **Basic parameters:**



Insulation performance: Level 6



Wind pressure resistance performance:





Watertightness performance: Level 8



Sound insulation performance:


Level 4




Airtightness coefficient:

Level 6

- 1, Split balanced Angle code injection process, improve the wind pressure resistance of the whole window and the overall safety performance
- 2, Three-layers sealing with isothermal vertical line design, has excellent heat preservation and insulation performance
- 3, Doors windows can be made, with glass protection integrated design, it looks noble and elegant and enhances the overall style of the home
- 4, Column-free corner design can be selected to eliminate visual obstacles and allow for a more open and airy space.
- 5, Reinforced center column design provides stable support for oversized glass, which is more resistant to wind pressure and safer.

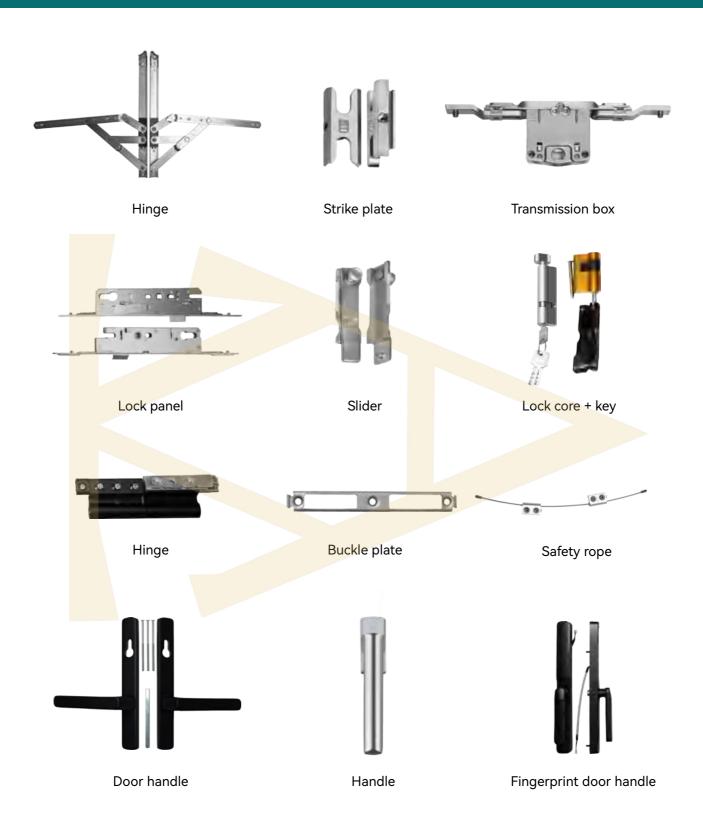


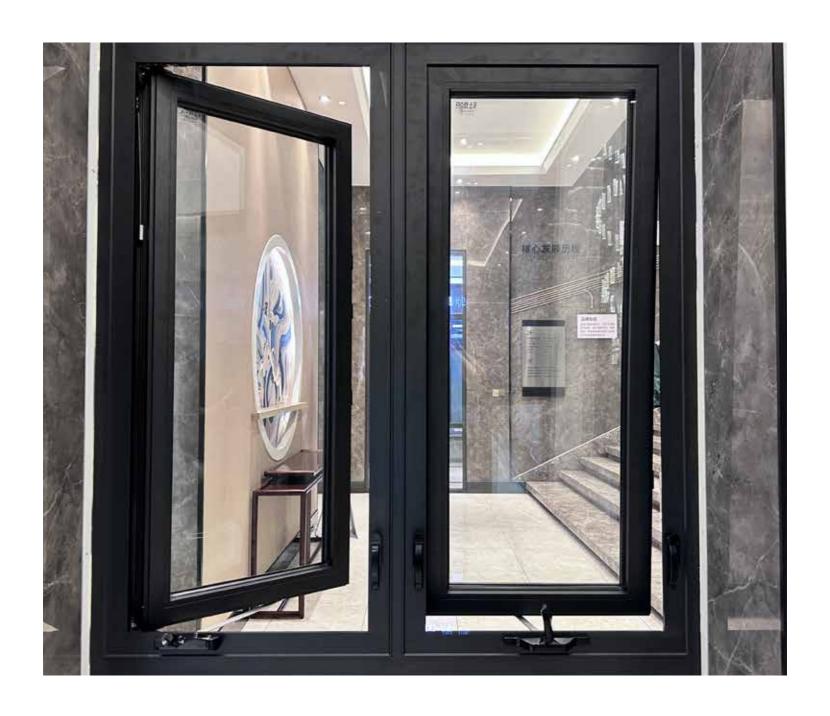



The beauty of the details bears witness to the craftsmanship of the product

# 65 SERIES SYSTEM CASEMENT WINDOW WITH BRIDGE CUT-OFF

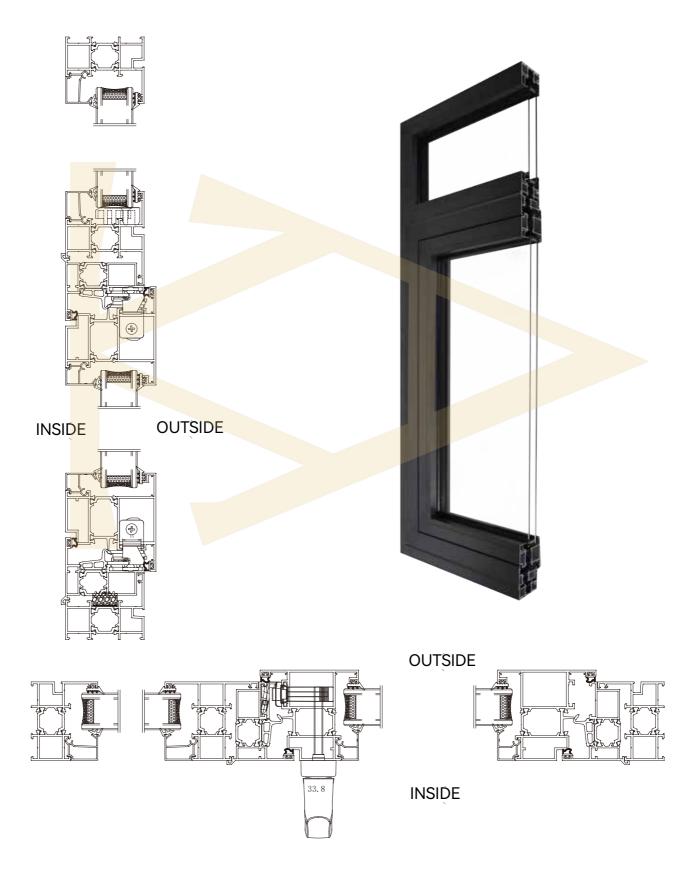

#### SERIES SYSTEM WINDOW

#### **Technical Parameters:**

Frame thickness:1.8mm Reinforced thickness:1.8mm

#### Size rang:

Sash width:500mm-750mm Sash height: 800mm-1400mm

#### **Glass specification:**

5+27A+5 double tempered insulating glass

#### Heat insulation strip:

35.3mm

#### **Product function:**

Inwards opening window

#### **Basic parameters:**



Insulation performance:

Level 7



Wind pressure resistance performance:

Level 9



Watertightness performance:

Level 7



Sound insulation performance:


Level 4




Airtightness coefficient:


Level 5

- 1, Isothermal vertical with 35.3mm heat-insulating strips, effectively prevents heat transfer, and has excellent thermal insulation performance.
- 2, Split balanced Angle code injection process, improve the wind pressure resistance of the whole window and the overall safety performance
- 3, Provide fancy color custom design to break the traditional monotony and make the windows become the highlight of home decoration
- 4, 27A hollow thickness, which can select three-glass and two-cavity structure, greatly enhances the sound insulation and heat insulation performance.
- 5, Doors windows can be made, with glass protection integrated design, it looks noble and elegant and enhances the overall style of the home

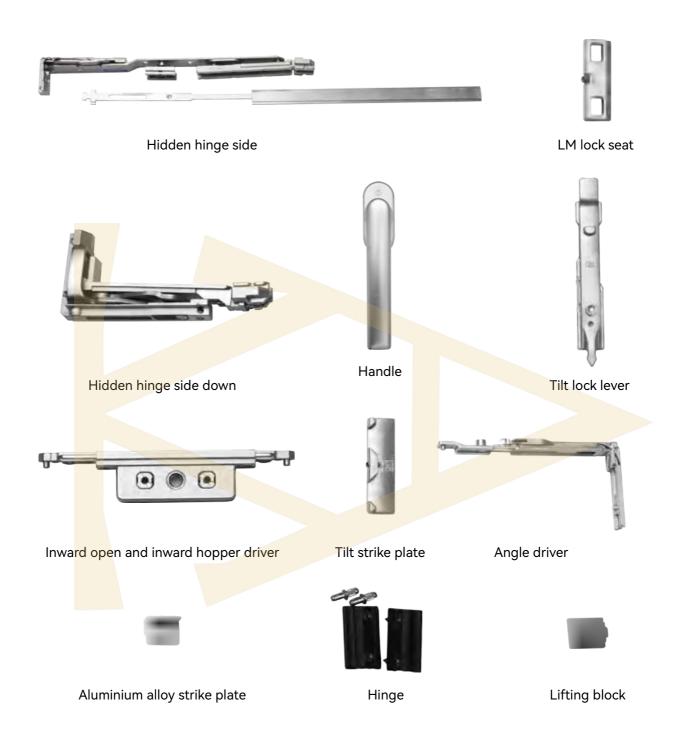




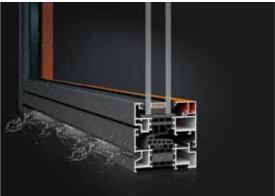

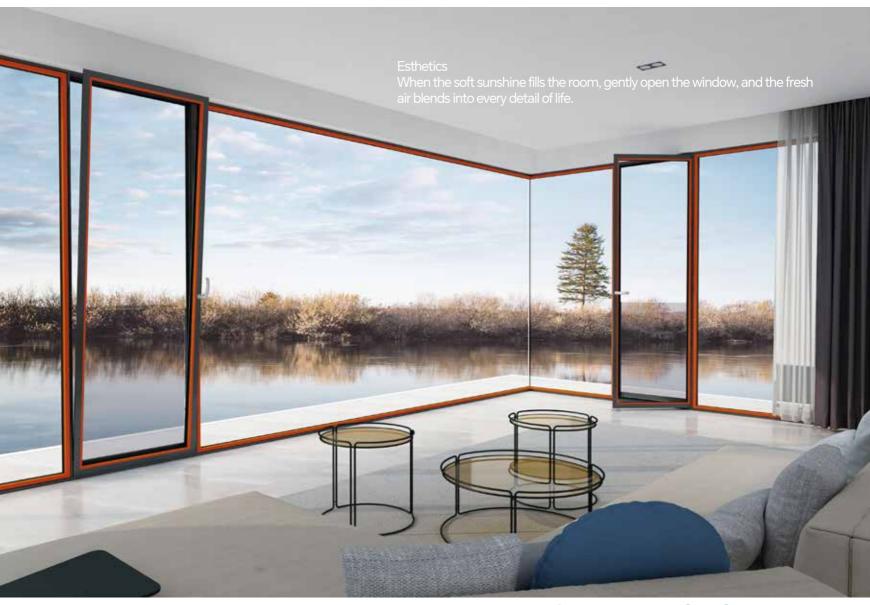

HIGH-END SYSTEM DOORS AND WINDOWS



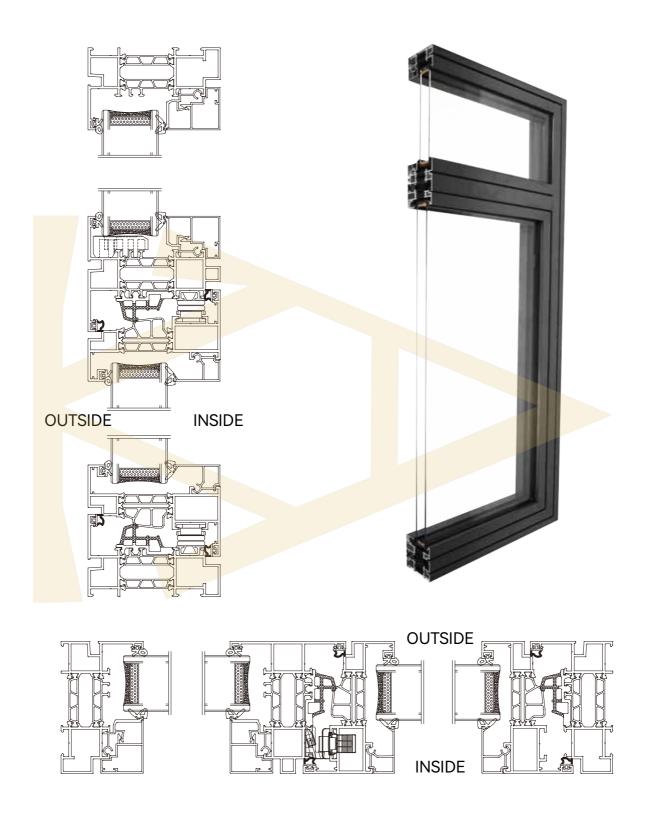

# 103 SERIES EXTREMELY NARROW SYSTEM WINDOW

#### **Technical Parameters:**

Frame thickness: 1.8mm Reinforced thickness: 1.8mm

#### Size rang:

Sash width:500mm-750mm Sash height: 800mm-1400mm

#### **Glass specification:**

5+20A+5 double tempered insulating glass

#### Heat insulation strip:

22mm

#### **Product function:**

Inwards opening window

#### Basic parameters:



Insulation performance:

Level 5



Wind pressure resistance performance:

evel 8



Watertightness performance:

Level 6




Sound insulation performance: **Level 4** 




Airtightness coefficient:

Level 5

- 1, Concealed pull handle with strike plate has its own flip-up nut which is simple and strong
- 2, 26mm narrow edge design allows for a wider field of view
- 3, Inside and outside flat frame design, looks beautiful and practical, and has longer service life for rubber strips
- 4. The window screen features a anti-children spring lock which is more delicate and safe
- 5,Integrated glue injection process combined with three layers cross-section glue technology to strengthen the wind pressure resistance of the whole window.

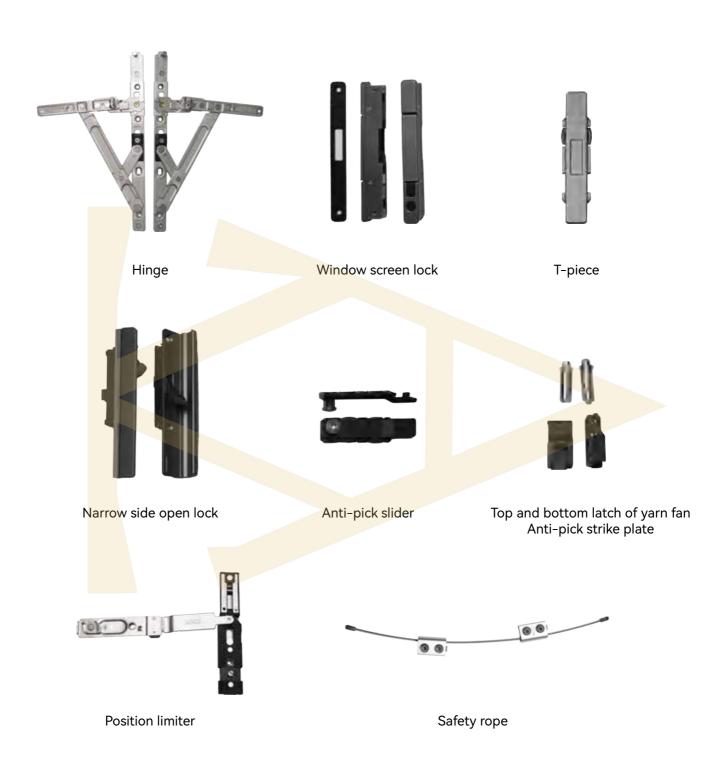




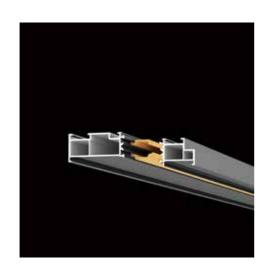




Art
Emphasize details and aesthetics, allowing people to appreciate and experience the charm of art.

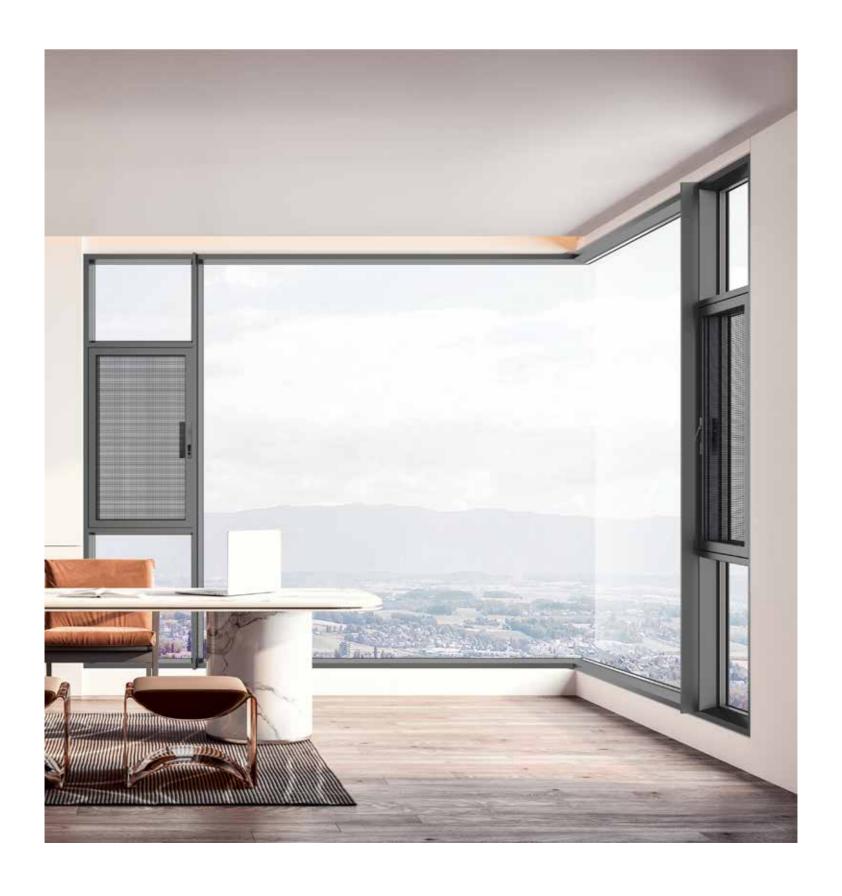

# HIGH-END SYSTEM DOORS AND WINDOWS

# 103 SERIES EXTREMELY NARROW SYSTEM WINDOW

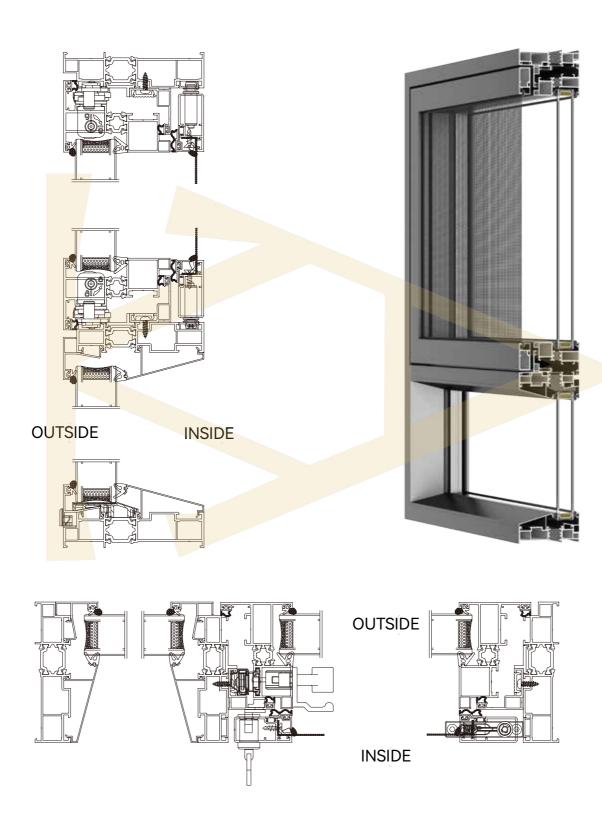

#### 108 SERIES SYSTEM WINDOW

#### **Technical Parameters:**

Frame thickness: 1.8mm Reinforced thickness: 2.0mm

#### Size rang:

Sash width:500mm-750mm sash height: 800mm-1400mm

#### **Glass specification:**

5+20A+5 double tempered insulating glass

#### Heat insulation strip:

14.8mm

#### **Product function:**

Outward opening window

#### **Basic parameters:**



Insulation performance:

Level 5



Wind pressure resistance performance:

Level 8



Watertightness performance:

Level 6




Sound insulation performance: Level 4



Airtightness coefficient:

Level 5

- 1,There is a variety of crimping to choose from, and it looks beautiful and atmospheric.
- 2, Split balanced Angle code injection process, improve the wind pressure resistance of the whole window and the overall safety performance
- 3, The internal and external flat frame design makes the lines not only smooth but also more aesthetic. with three sealing design, it can effectively isolate the external interference.
- 4, 20A hollow thickness effectively isolates external noise.
- 5,Adopting imported brand hardware, its quality can be assured, and it's more durable

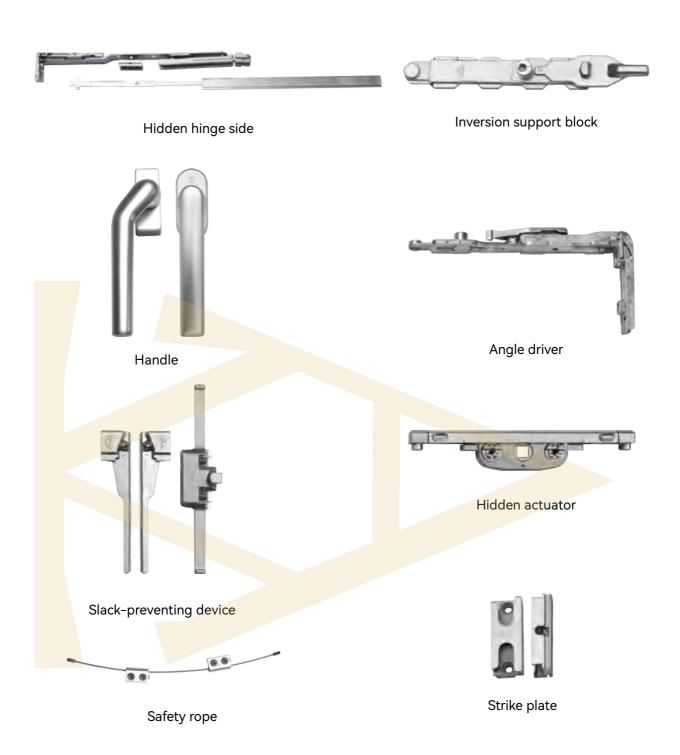






nign-ena

High quality doors and windows provide you with more choices, allowing you to live without boundaries, feel the fresh air from nature, soothe your soul, and enjoy comfort.

# ZEKIN®



# 108 SERIES SYSTEM WINDOW

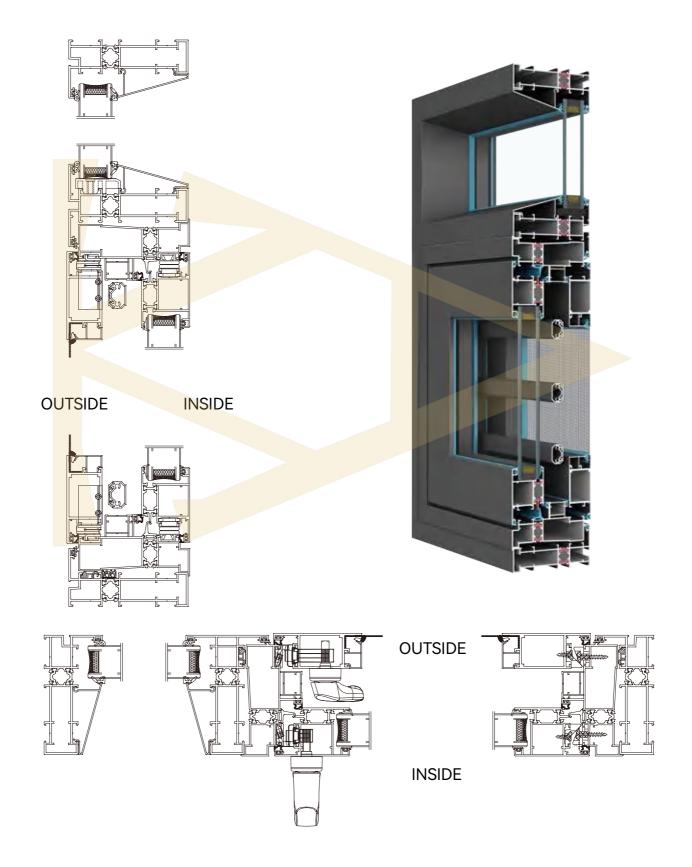

#### 97 SERIES SYSTEM WINDOW

#### **Technical Parameters:**

Frame thickness: 1.8mm Reinforced thickness: 1.8mm

#### Size rang:

Sash width: 500mm-750mm sash height: 800mm-1400mm

#### **Glass specification:**

Double inward opening: 5+24A+5 double tempered insulating glass; Single inward opening: 5+27A+5 double tempered insulating glass

#### Heat insulation strip:

35.3mm

#### **Product function:**

Inward opening window

#### **Basic parameters:**



Insulation performance:

Level 6



Wind pressure resistance performance:

Level 8



Watertightness performance:

Level 6




Sound insulation performance: Level 4




Airtightness coefficient:


Level 4


- 1, Isothermal vertical with 35.3mm heat-insulating strips, effectively prevents heat transfer, and has excellent thermal insulation performance.
- 2,The corner cleat injection process not only increases the structural stability of the window, but also improves the 5 major performance of the window.
- 3, Three-layers sealing with isothermal vertical line design, has excellent heat preservation and insulation performance
- 4, Standard with three glass and two chambers, optional 5+24A+5 double-layer hollow glass, it has better heat preservation and insulation effect
- 5, Adopting imported brand hardware, its quality can be assured, and it's more durable

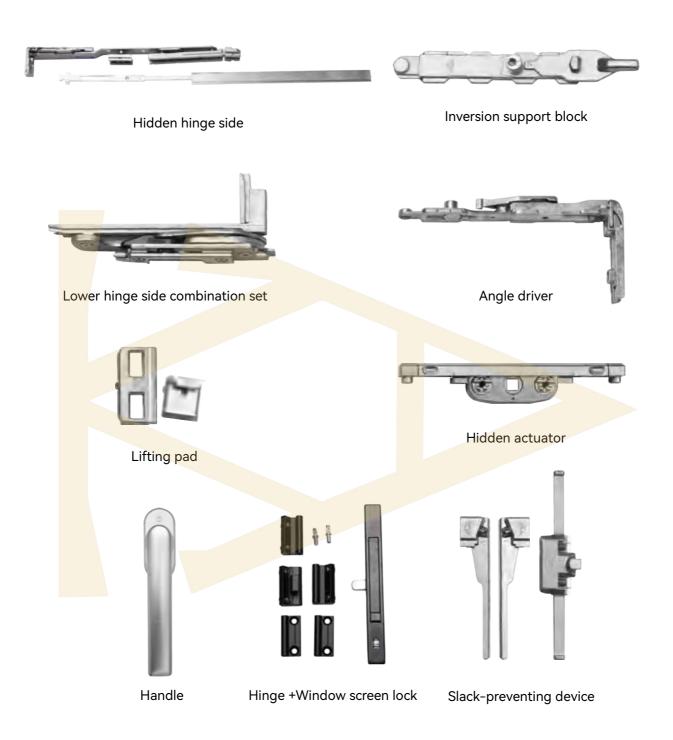



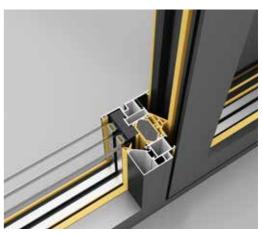

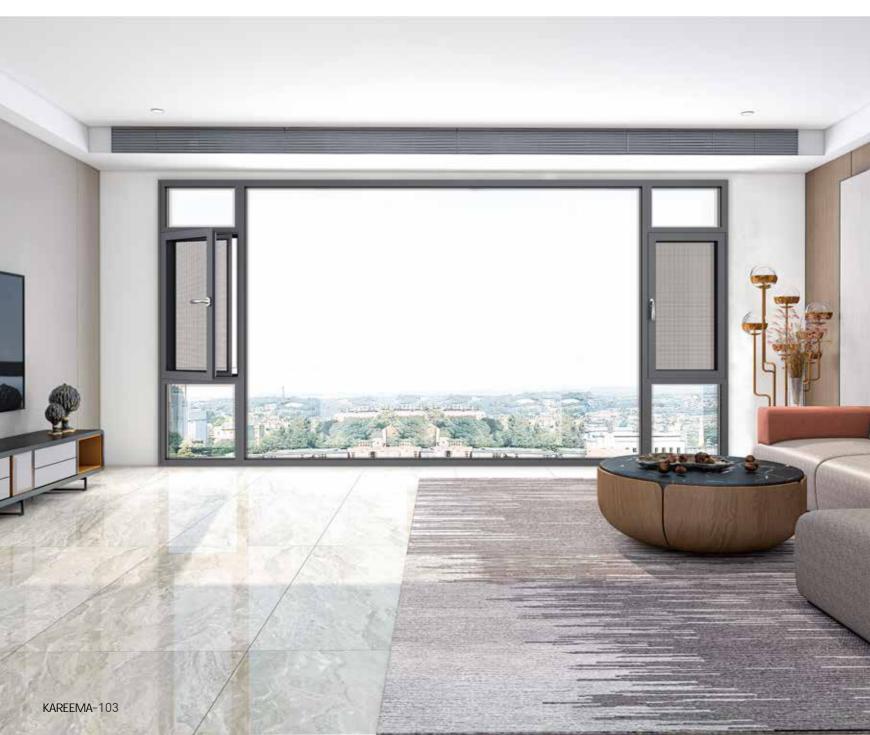

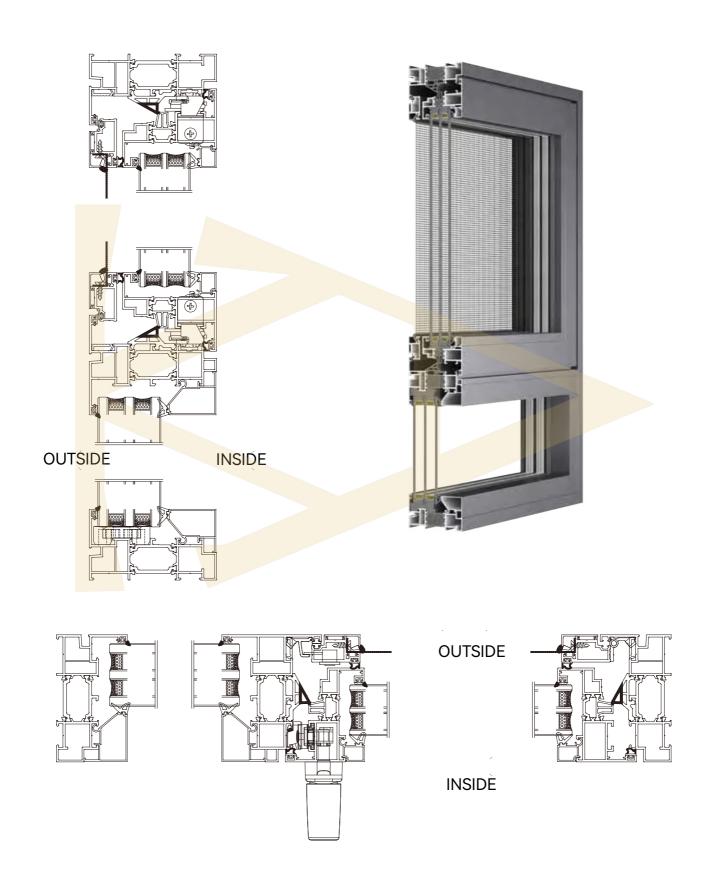

## **SERIES**SYSTEM WINDOW

#### **Technical Parameters:**

Frame thickness: 1.8mm Reinforced thickness: 1.8mm

#### Size rang:

Sash width:500mm-750mm sash height: 800mm-1400mm

#### **Glass specification:**

5+20A+5 double tempered insulating glass

#### Heat insulation strip:

30mm

#### **Product function:**

Inward opening window

#### **Basic parameters:**



Insulation performance:

Level 6



Wind pressure resistance performance:

Level 8



Watertightness performance:

Level 6



Sound insulation performance:


Level 4





Airtightness coefficient:


Level 4


- 1, Reinforced wall thickness design has higher safety performance, higher wind pressure resistance
- 2, The corner cleat injection process not only increases the structural stability of the window, but also improves the 5 major performance of the window.
- 3,Three seals with isothermal perpendicular lines for excellent thermal insulation performance
- 4, Adopting 304 stainless steel high-transparency mesh, provides better ventilation and visual effect
- 5, Three glass and two chambers can be selected to effectively enhance sound insulation, heat preservation and thermal insulation performance.
- 6, Reinforced center column design provides stable support for oversized glass, which is more resistant to wind pressure and safer.

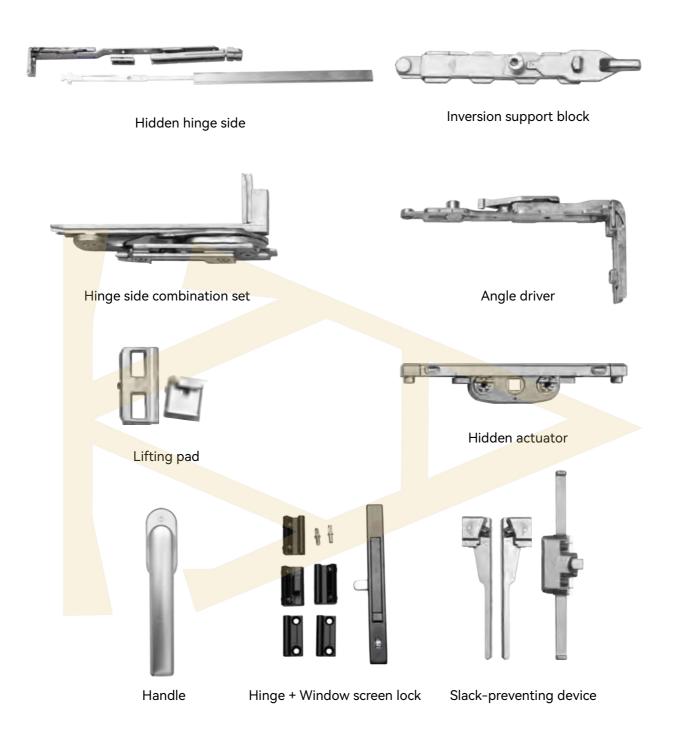

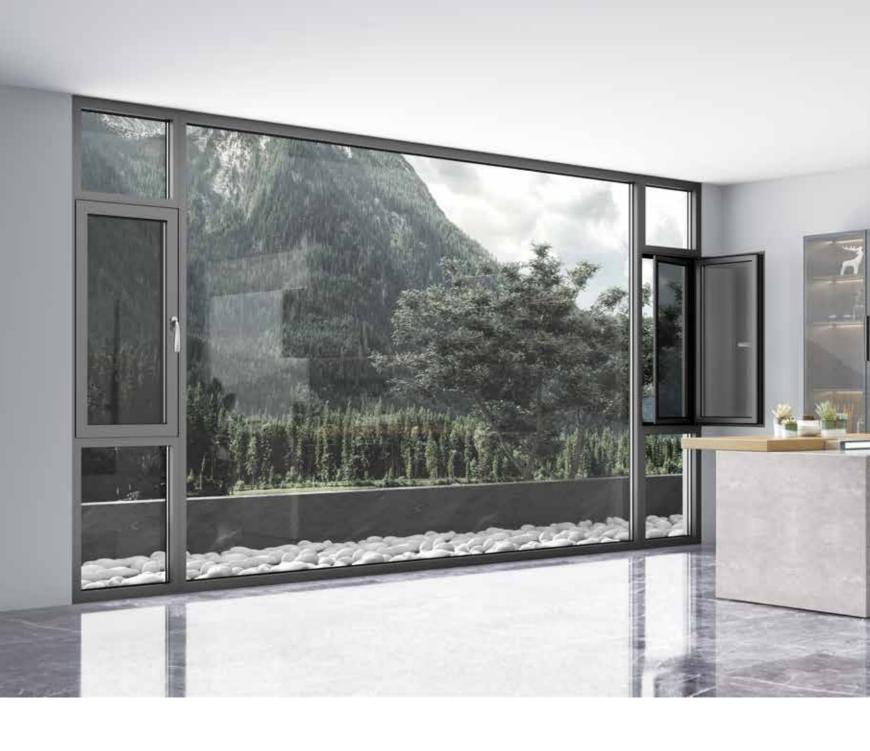

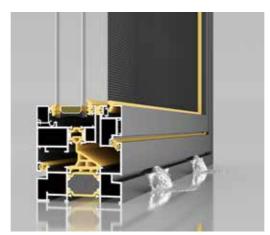

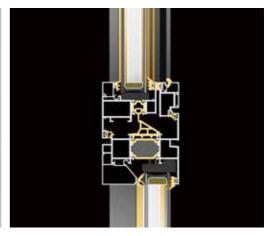

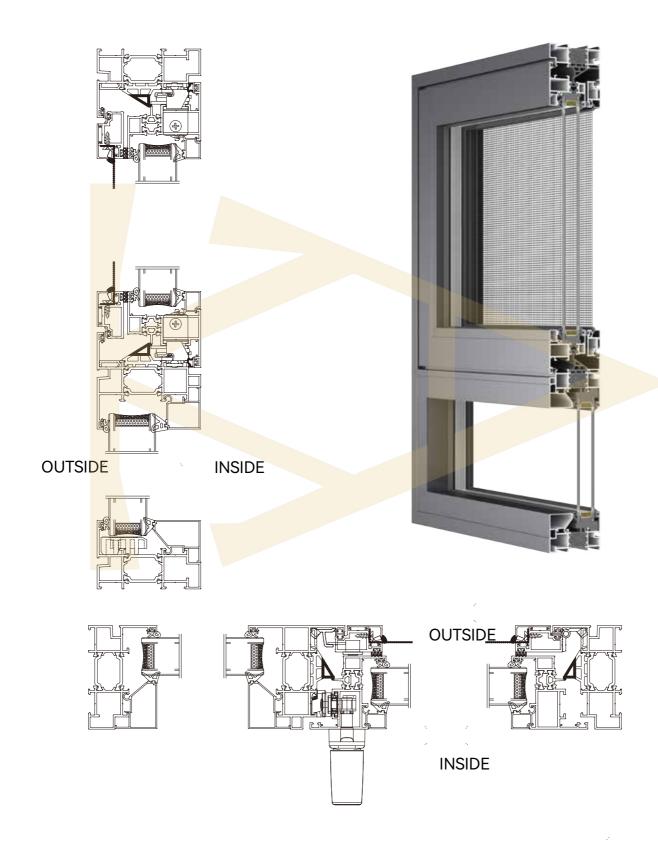

#### 135 SERIES SYSTEM FLOATING WINDOW

#### **Technical Parameters:**

Frame thickness:1.4mm

Reinforced thickness: 2.2mm

#### Size rang:

Sash width 750mm-2500mm, Sash height 800mm-1300mm

#### **Glass specification:**

5+15A+5 double tempered insulating glass

#### Heat insulation strip:

14.8mm

#### **Product function:**

Sliding window/door

#### Basic parameters:



Insulation performance: Level 4



Wind pressure resistance performance:

Level 7



Watertightness performance:

Level 5




Sound insulation performance: Level 3




Airtightness coefficient:


Level 4

- 1, It doesn't take up much room space, has a large push-pull area, and is well-ventilated
- 2, Fixed below can be equipped with handrails to create a scenic recreational area
- 3,304 stainless steel diamond mesh which is Triple-rail design, applicable to a longer life, and anti-mosquito effect is remarkable.
- 4,The embedded design of the downward track effectively prevents the wind and rain from disturbing and improves the sealing performance of the doors and windows.

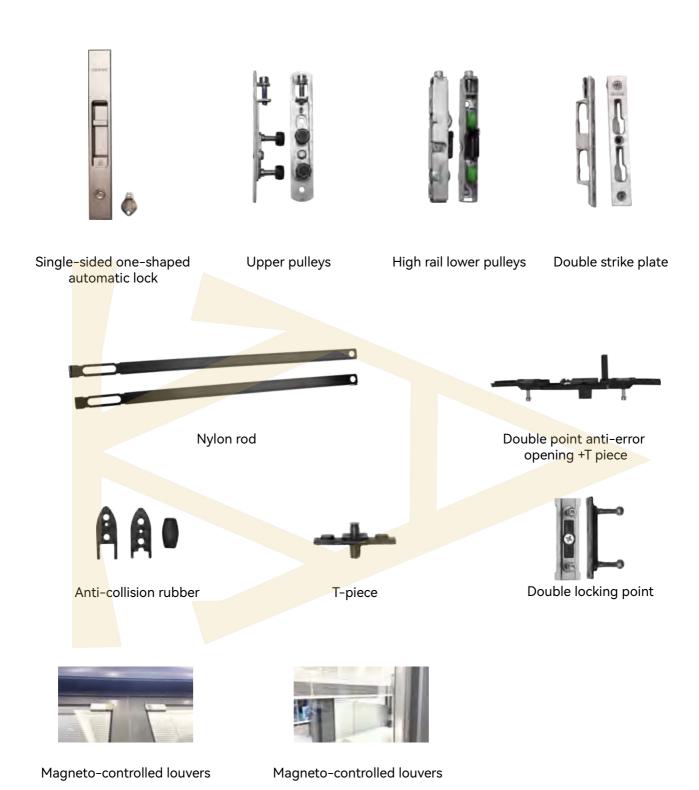

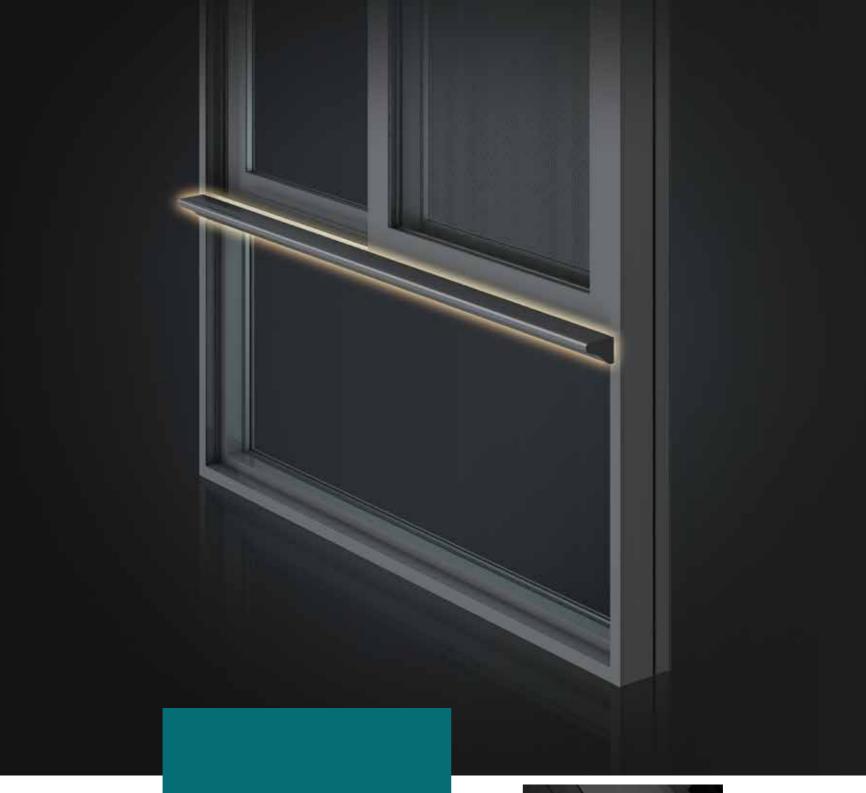





PRODUCT DETAILS


# **HIGH-END SYSTEM**DOORS AND WINDOWS


#### Simplicity

The minimalist design concept eliminates unnecessary decorations and creates a peaceful and comfortable living space.



## 135 SERIES SYSTEM FLOATING WINDOW

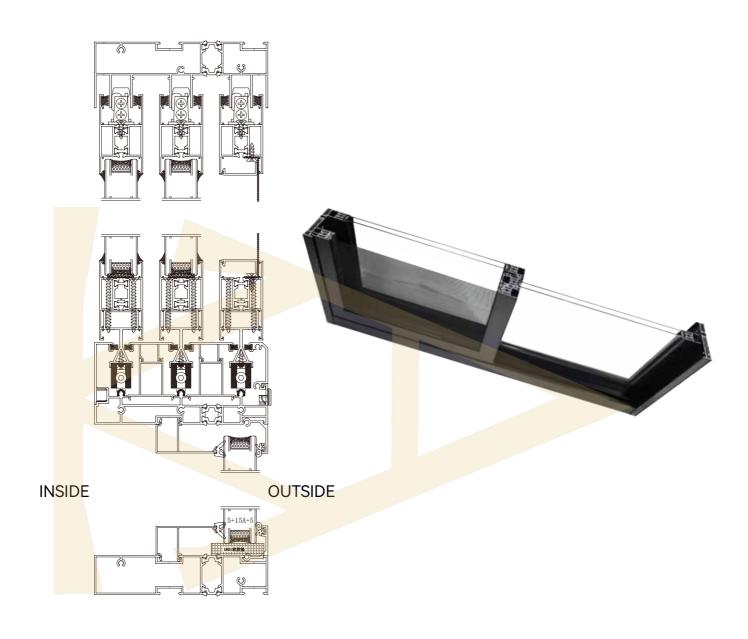

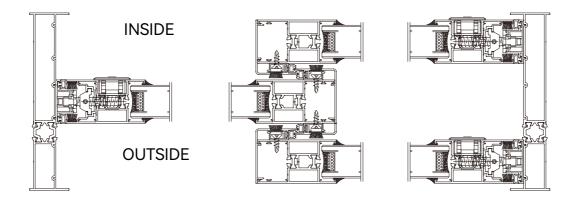

#### 135 SERIES SYSTEM SLIDING DOOR

#### **Technical Parameters:**

Frame thickness:1.4mm Reinforced thickness:1.4mm

#### Size rang:

Sash width 450mm-1000mm, Sash height 1000mm-2400mm

#### **Glass specification:**

5+15A+5 double tempered insulating glass

#### Heat insulation strip:

14.8mm

#### **Product function:**

Sliding window/door

#### Basic parameters:



Insulation performance:

Level 3



Wind pressure resistance performance:

Level 7



Watertightness performance:

Level 4



Sound insulation performance:

Level 2



Airtightness coefficient:

Level 3

- 1,Bridge cut-off sliding door has better thermal insulation performance
- 2,Adopting stainless steel shaft and carbon fiber pulleys, pushing and pulling for 100,000 times is not a problem, sliding smoothly and durably
- 3, High-rail track design for effective waterproofing
- 4, Hollow glass which is 5+15A+5, has better sound insulation performance











**PRODUCT DETAILS** 

# 135 SERIES SYSTEM SLIDING DOOR

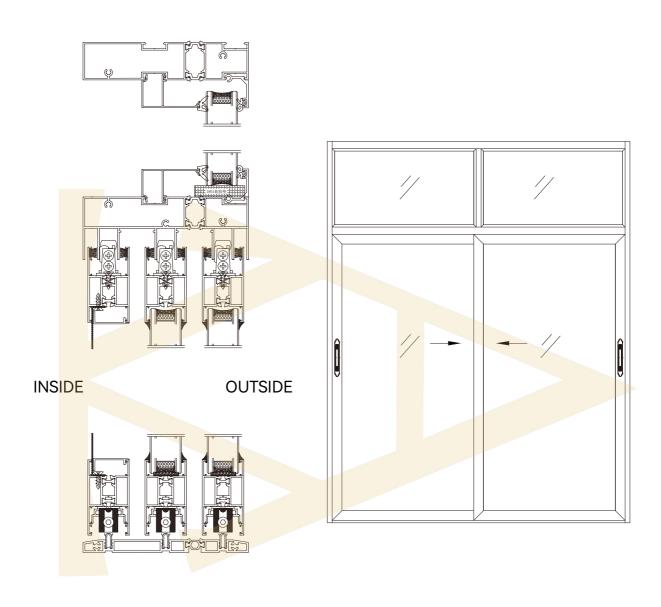

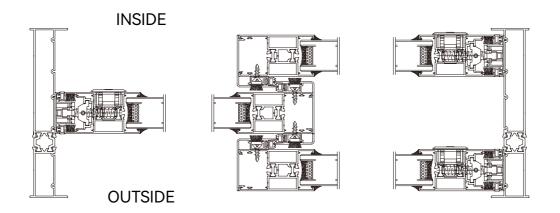

#### 138 SERIES SYSTEM SLIDING WINDOW

#### **Technical Parameters:**

Frame thickness: 1.4mm Reinforced thickness: 2.2mm

#### Size rang:

Sash width: 750mm-2500mm Sash height: 800mm-1300mm

#### **Glass specification:**

5+15A+5 double tempered insulating glass

#### Heat insulation strip:

14.8mm

#### **Product function:**

Sliding window

#### **Basic parameters:**



Insulation performance:

Level 4



Wind pressure resistance performance:

l evel 7



Watertightness performance:

Level 5



Sound insulation performance:


Level 3



Airtightness coefficient:


Level 4

- 1, One-shaped anti-swing pulleys + anti-typhoon pulleys functional design, is more stable, more resistant to wind pressure
- 2, Frame with hidden fan structure, looks more simple and beautiful. Security and stability of the double can be guaranteed
- 3, Safety and light of new high-transparency diamond steel screen , all can be realized
- 4, Flow-break drainage design prevents rainwater back-up through the flow-break layer
- 5, Hidden Children code Locks, are safer and more beautiful

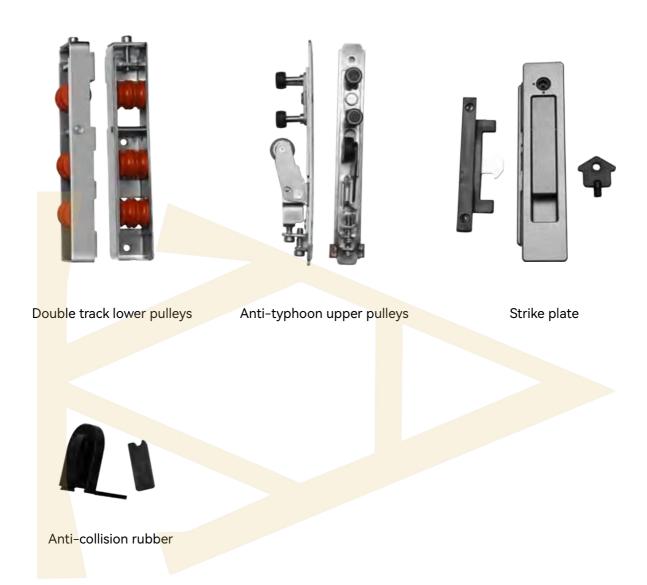




### **PRODUCT DETAILS**

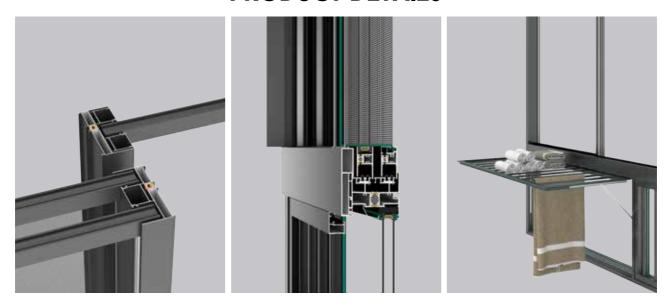

# HIGH-END SYSTEM DOORS AND WINDOWS



# 138 SERIES SYSTEM SLIDING WINDOW

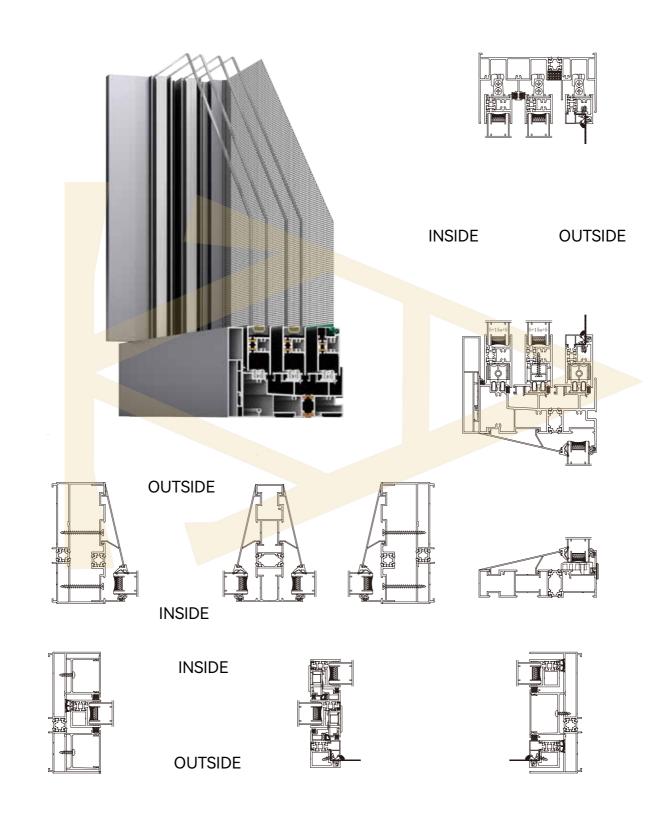

# 120 SERIES PANORAMIC SLIDING WINDOW

#### **Technical Parameters:**

Frame thickness: 1.6mm

#### Glass specification:

5+15A+5 double tempered insulating glass

#### **Basic parameters:**



Insulation performance:

Level 4



Wind pressure resistance performance:

Level 7



Watertightness performance:

Level 5



Sound insulation performance:

Level 3



Airtightness coefficient:

Level 4

- 1, Adopting high-strength and high-quality aluminum alloy material structure design, is sturdy and durable
- 2, It can broadens views and enhances lightness
- 3. Parallel track sliding method not only reduces the friction impact of the window sash, but also makes safe and stable
- 4,Bridge cut-off technology reduces heat conduction and provides excellent thermal and sound insulation.



Rubber bumpers






Personality

Pursuing uniqueness and personalization, creating a unique space that showcases one's unique taste and personality.

# HIGH-END SYSTEM DOORS AND WINDOWS

### 120 SERIES PANORAMIC SLIDING WINDOW

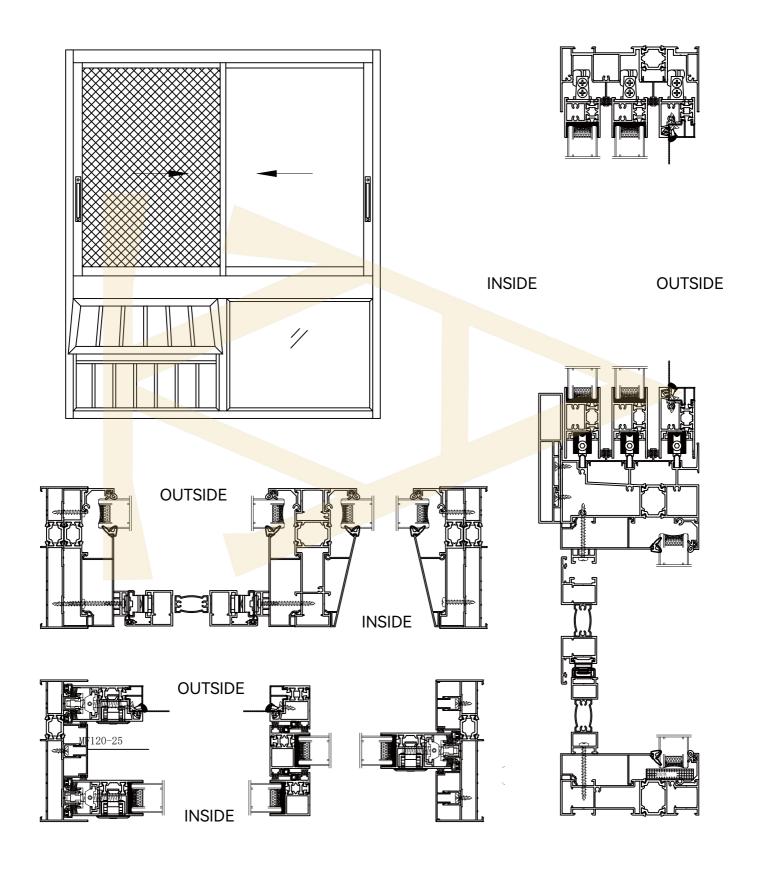

#### 118 SERIES SYSTEM SLIDING WINDOW

#### **Technical Parameters:**

Profile:thickness:2.0mm local reinforcement:2.2mm

#### Size rang:

Sash width:600mm-2200mm Sash height: 1000mm-1400mm

#### **Glass specification:**

5+15A+5 double tempered insulated glass


#### **Heat insulation strip:**

24mm

#### **Product function:**

Lifting Window


- 1, Adopting high-strength and high-quality aluminum alloy material structure design, is sturdy and durable
- 2, Bridge cut-off technology reduces heat conduction and provides excellent thermal and sound insulation.
- 3, Versatile design supports three-rail slidingl and can be customized according to needs
- 4, Multi-point locking system provides high anti-theft performance and security of use
- 5, Hidden Children code Locks, are safer and more beautiful

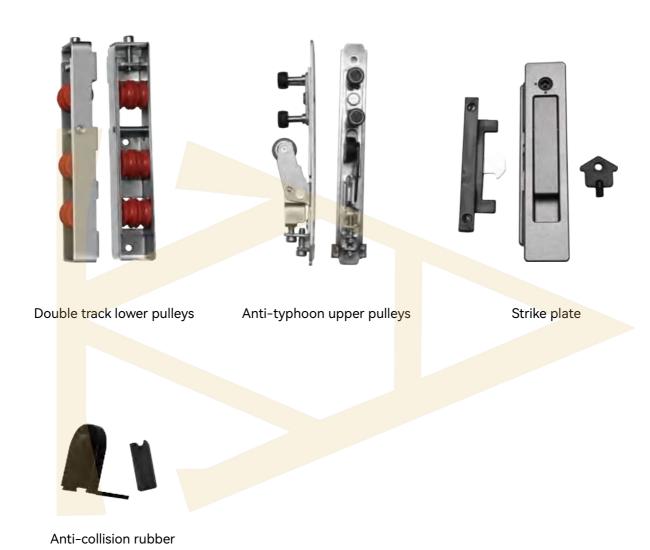

# HIGH-END SYSTEM DOORS AND WINDOWS



## 118 SERIES SYSTEM SLIDING WINDOW

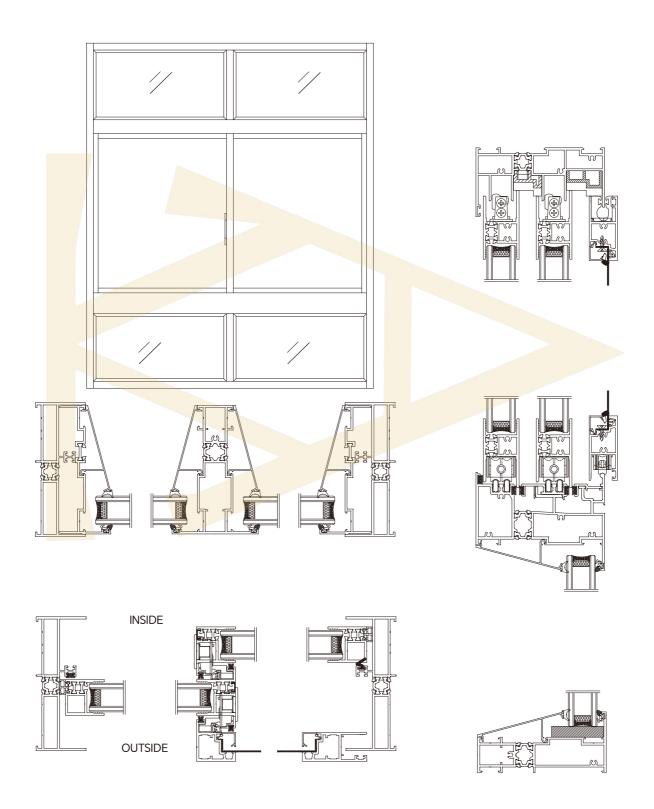

# 185 SERIES PANORAMIC LIFTING DOOR

#### **Technical Parameters:**

Frame thickness: 2.3mm Reinforced thickness: 2.3mm

#### Size rang:

Sash width: 750mm-2000mm Sash height: 1800mm-2800mm

#### **Glass specification:**

5+20A+5 double tempered insulating glass


#### Heat insulation strip:

25.3mm

#### **Product function:**

Sliding window


- 1, Reinforced wall thickness design has higher safety performance, higher wind pressure resistance
- 2, Gluing process improves frame stability and splice strength.
- 3, High-track floor drain design, is more conducive to the evacuation of rainwater drainage, and looks beautiful and practical
- 4, Modern minimalist design, combining practical functionality with innovative aesthetics

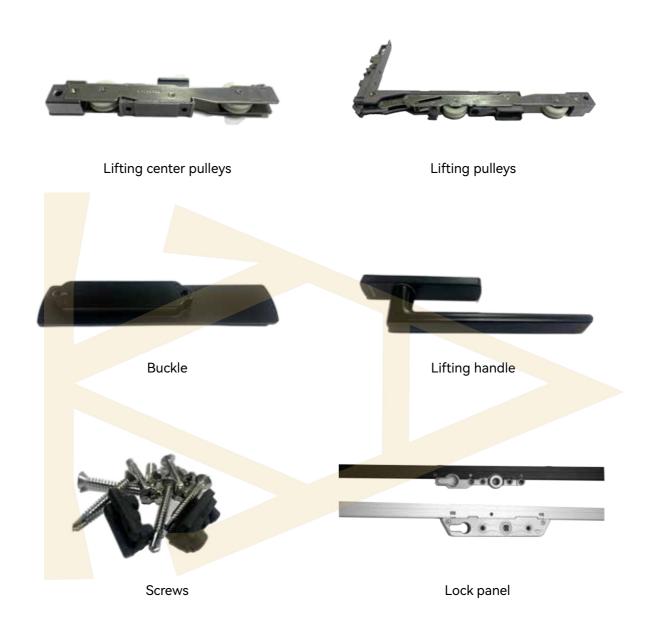



Personality
Pursuing uniqueness and personalization, creating a unique space that showcases one's unique taste and personality.


## 185 SERIES PANORAMIC LIFTING DOOR

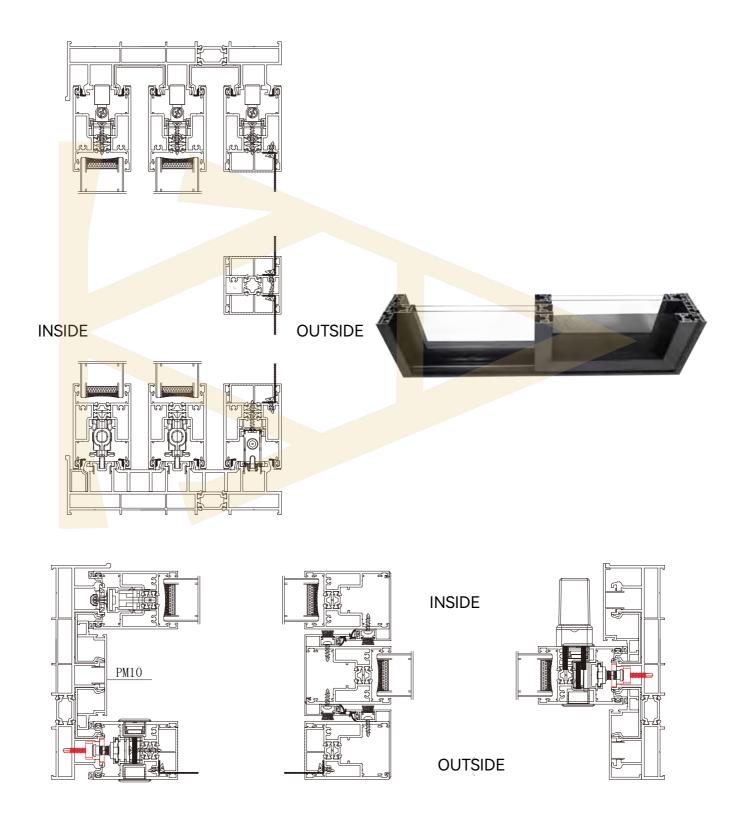

## 155 SERIES SLIDING DOOR

- 1, High-rail, low rail can be selected, to meet a variety of use scenarios
- 2, Side frame multi-layers sealing process, can reach effective sealing mosquito prevention
- 3, The design of frame wrapping sash and sash wrapping frame structure can realize more secure and stable
- 4, Equipped with 5+20A+5 double-layer hollow tempered glass, and its sound insulation and heat insulation effect is better



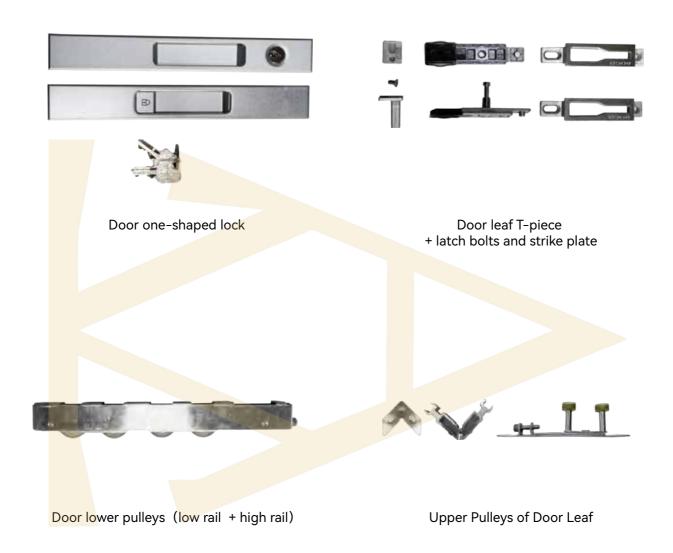


# HIGH-END SYSTEM DOORS AND WINDOWS



Delicate Exquisite carving and perfect structure create a beautiful landscape in the space.

## 155 SERIES SLIDING DOOR

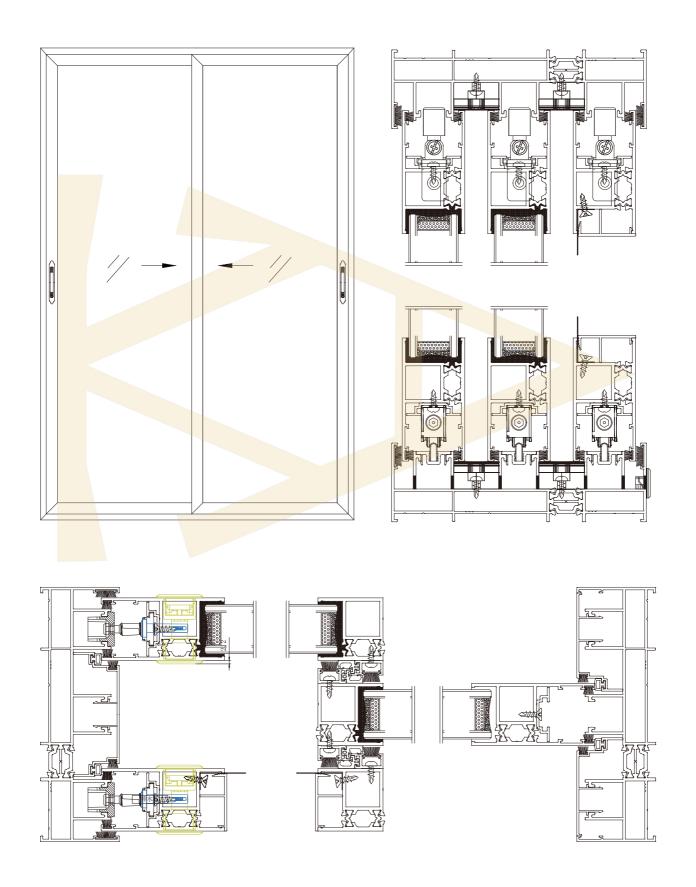

# 18065 SERIES HEAVY SLIDING DOOR

#### **Technical Parameters:**

Profile:thickness: 3.0mm local reinforcement: 3.0mm

#### Size rang:

Sash width:750mm-2000mm Sash height: 750mm-3000mm

#### **Glass specification:**

5+15A+5 double tempered insulated glass

#### **Product function:**

Sliding door

- 1, Appearance of product is elegant and generous
- 2, Embedded structure design has better air and water tightness
- 3, Surface of frame and sash feels smooth , so it is cost-effective
- 4, it combined middle-narrow design with light luxury style






PRODUCT DETAILS



# HIGH-END SYSTEM DOORS AND WINDOWS

# 18065 SERIES HEAVY SLIDING DOOR

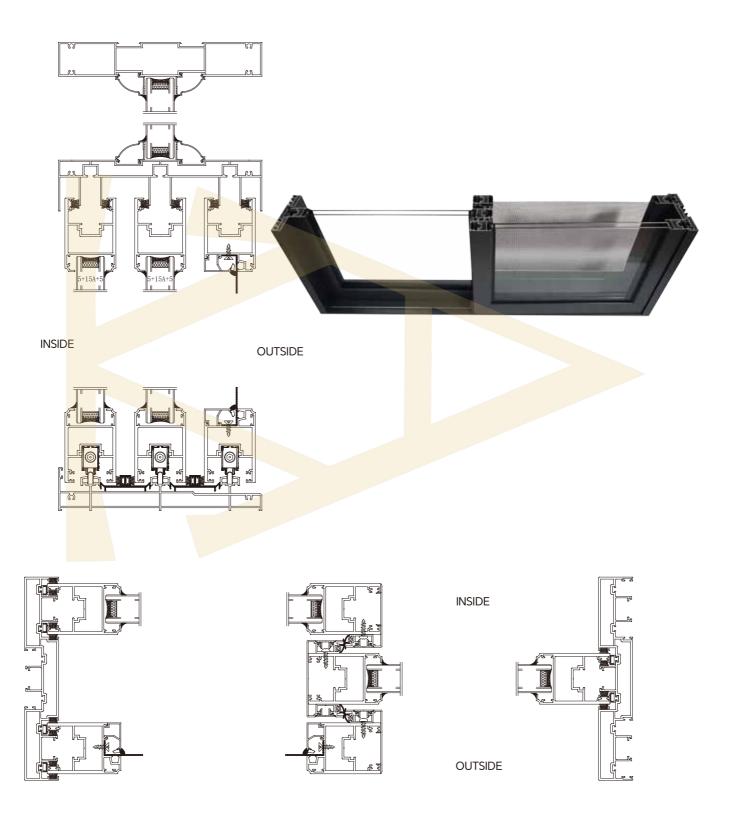

## 180100 SERIES HEAVY SLIDING DOOR

#### **Technical Parameters:**

Profile:thickness: 2.0mm local reinforcement: 2.0mm

Size rang:

Sash width:750mm-2000mm Sash height: 750mm-3000mm

**Glass specification:** 


5+24A+5 double tempered insulated glass

**Product function:** 

Sliding door

- 1, Appearance of product is elegant and generous
- 2, Embedded structure design has better air and water tightness
- 3, Extra-large hollow space provides excellent sound insulation
- 4, it can be selected in different craft glass and other styles to match the style of your home.

## **HARDWARE** CONFIGURATION

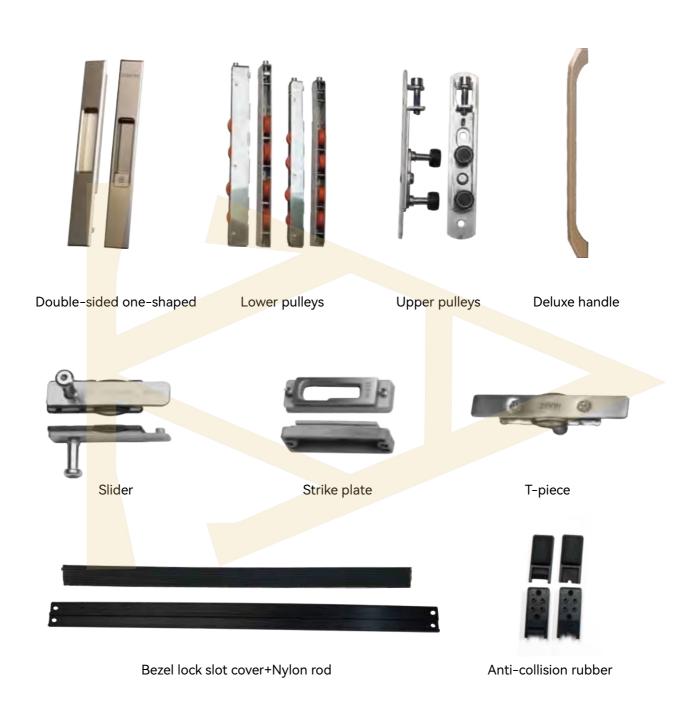


## **PRODUCT ACCESSORIES**





Delicate Exquisite carving and perfect structure create a beautiful landscape in the space.

# 180100 SERIES HEAVY SLIDING DOOR

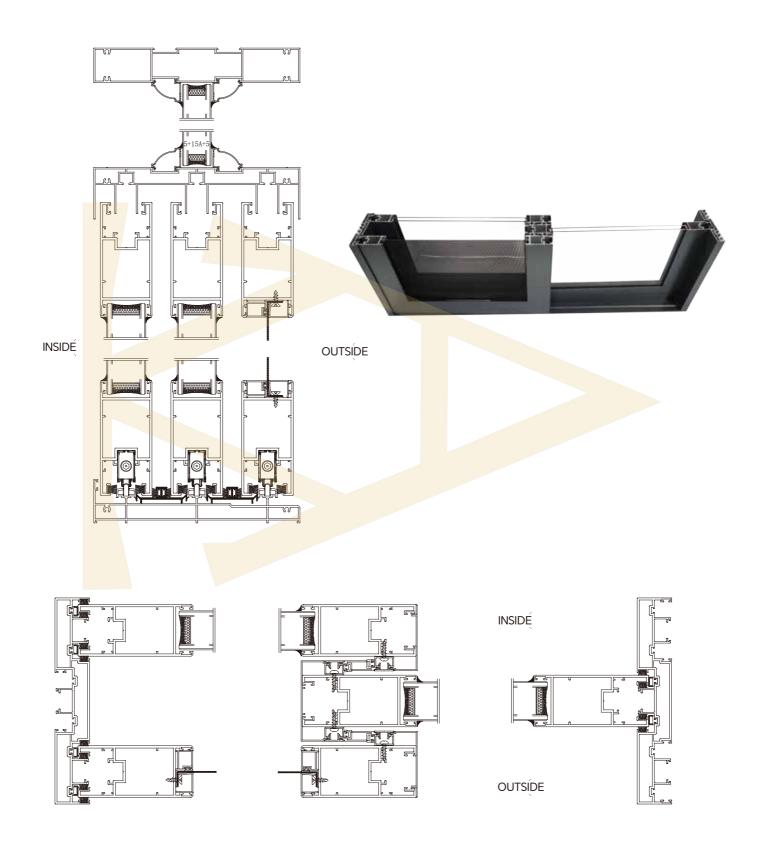

# 4516 SERIES CASEMENT DOOR

#### **Technical Parameters:**

Profile:thickness: 2.0mm local reinforcement: 2.0mm

Size rang:

Sash width:500mm-800mm Sash height: 800mm-2200mm

### Glass specification:

Standard 8mm double-sided gold diamond white glass


### **Product function:**

Casement door

### **Product description:**

- 1, Adopting 6063 profile, which has high quality, is sturdy and durable, and has good corrosion resistance
- 2,Adopting invisible flat hinges, which is simple one-piece design, look fashionable and beautiful
- 3, Narrow bezel design fills every corner with a sense of luxury

## **HARDWARE** CONFIGURATION

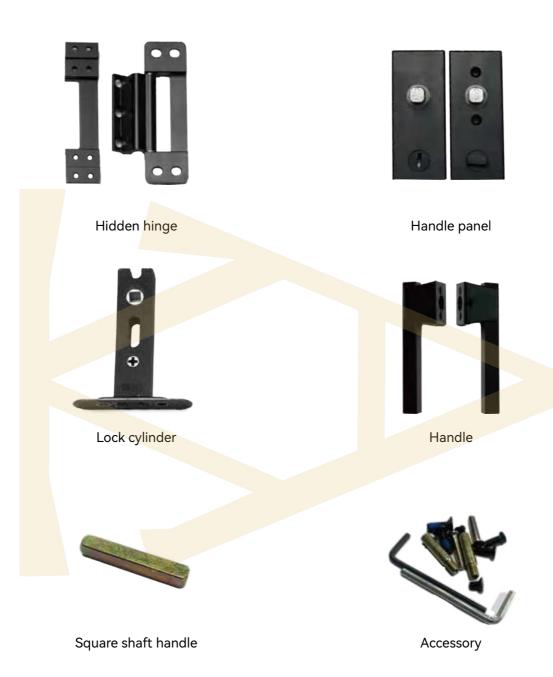


## **PRODUCT ACCESSORIES**





# 4516 SERIES CASEMENT DOOR

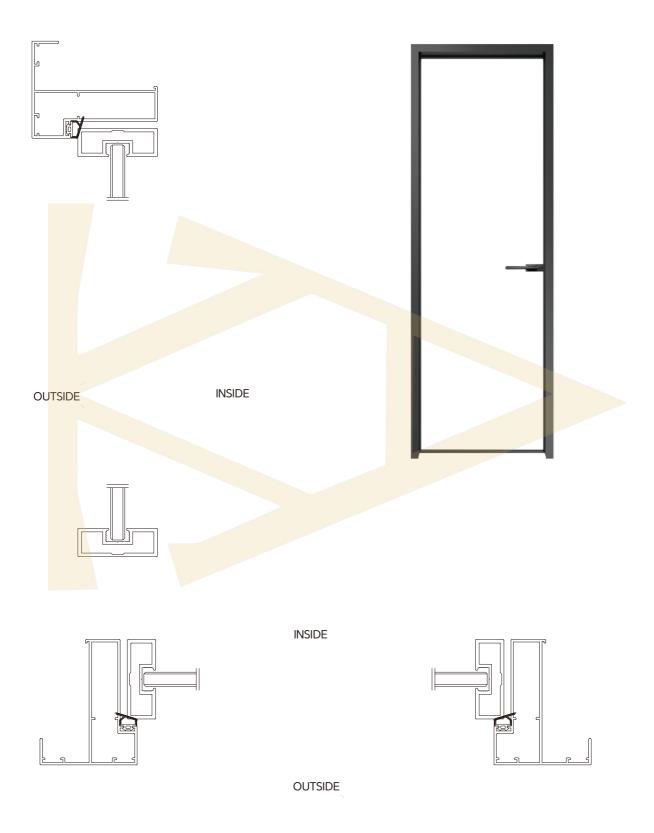

# 4516 SERIES EXTREMELY NARROW HANGING SLIDING DOOR

#### **Technical Parameters:**

Profile:thickness: 2.0mm local reinforcement: 2.0mm

#### Size rang:

Sash width:650mm-1000mm sash height: 800mm-2400mm

#### **Glass specification:**

Standard 8mm double-sided gold diamond white glass/gray glass


### Heat insulation strip:

Sliding door/Hanging sliding door

### **Product description:**


- 1, Appearance of product is elegant and generous
- 2, Embedded structure design has better air and water tightness
- 3, Extremely narrow design highlights modern fashion trends
- 4. The door saves space and is easy to clean and maintain.
- 5, Column-free corner design can be selected to eliminate visual obstacles and allow for a more open and airy space.


## **HARDWARE** CONFIGURATION

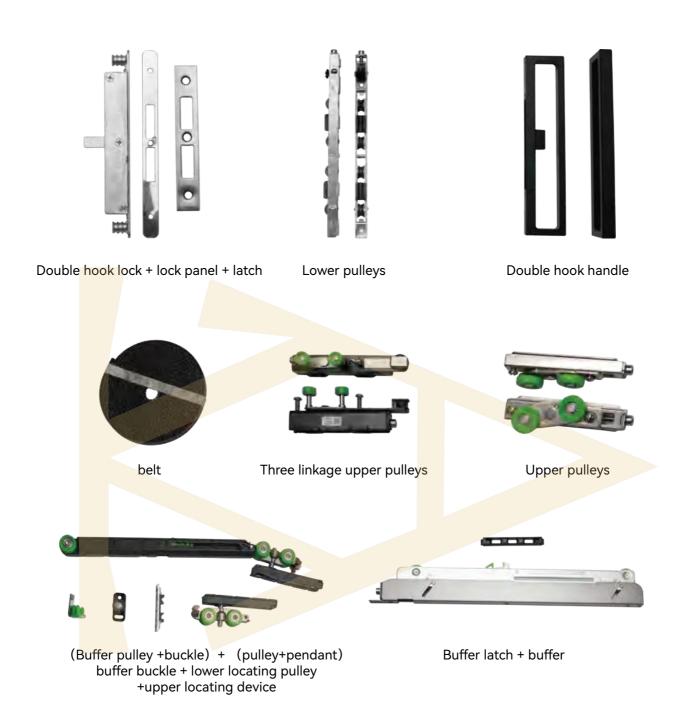



## **PRODUCT ACCESSORIES**

# HIGH-END SYSTEM DOORS AND WINDOWS

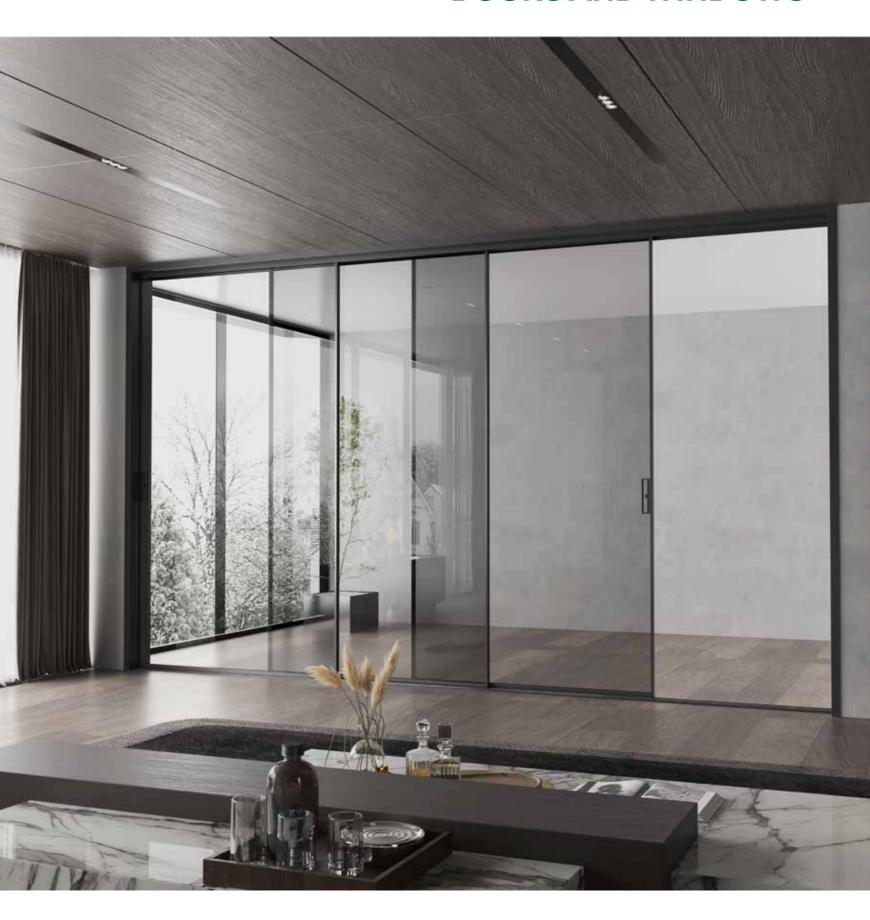

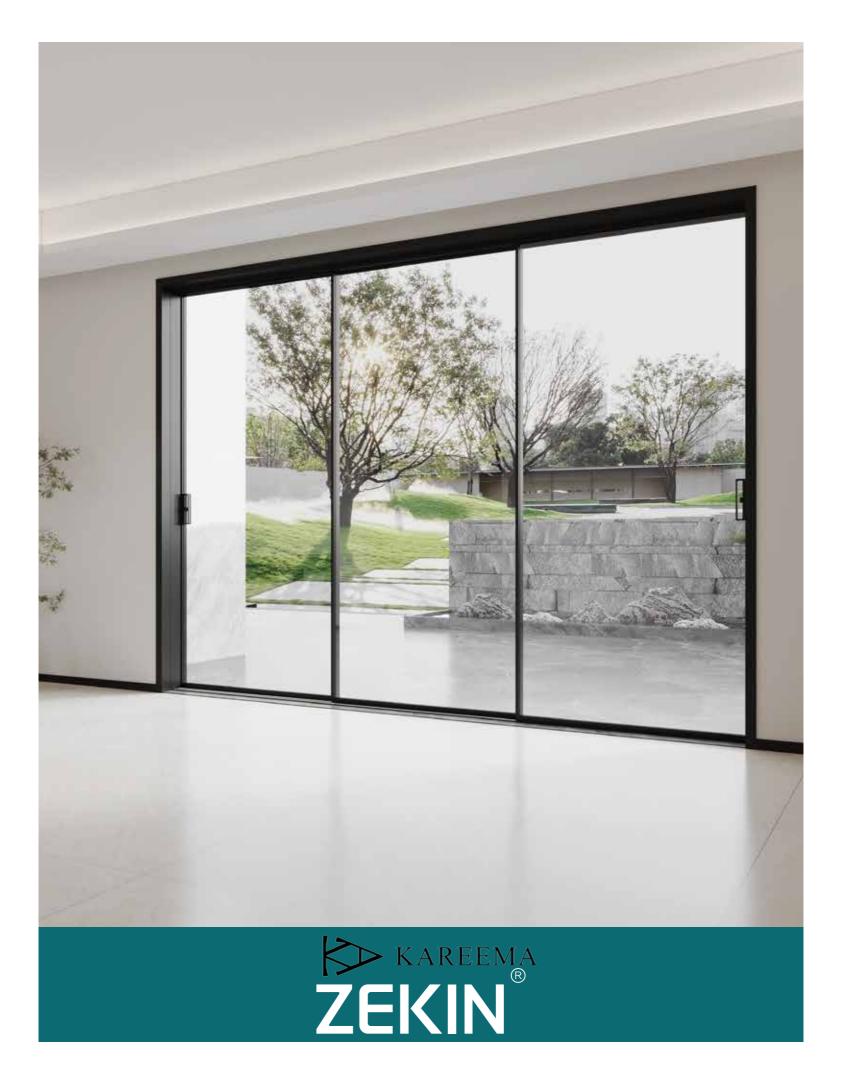

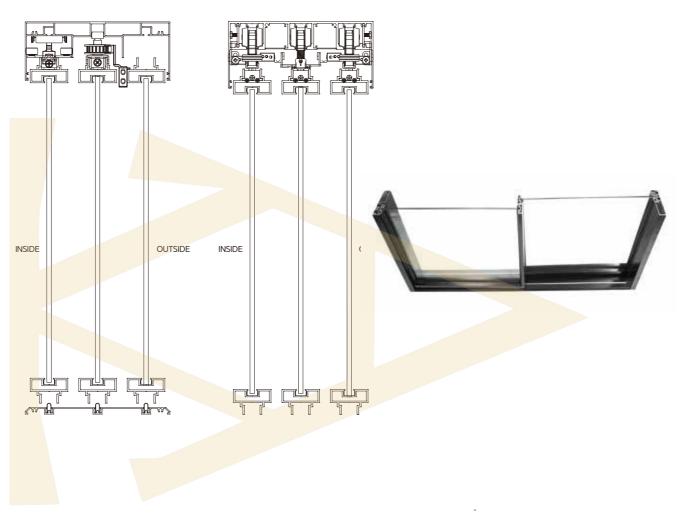

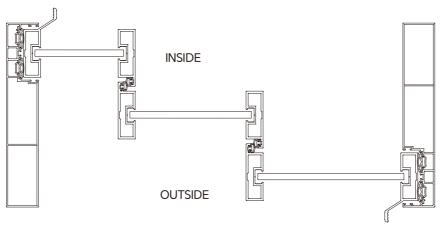

## **100 SERIES SUNROOM**


#### **Technical Parameters:**

Frame thickness: 2.5mm Reinforced thickness: 2.5mm


### **Product description:**

- 1, That this series is made of 6063 profiles, which has high quality, and is strong, durable, corrosion resistant.
- 2. The top can be matched with decorative lines and LED lights to enrich the atmosphere of space hierarchy
- 3, independent invisible balance principle of drainage system, smooth drainage
- 4. Equipped with electric skylight and blackout honeycomb curtain to adjust indoor light and ventilation
- 5, the appearance design integrates new Chinese elements, simple and elegant



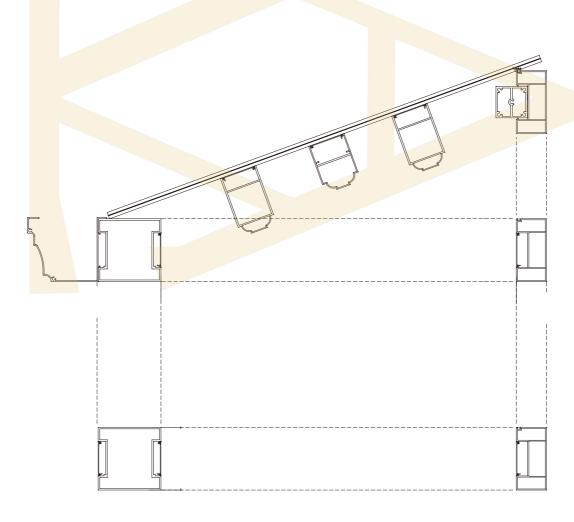

# 100 SERIES SUNROOM

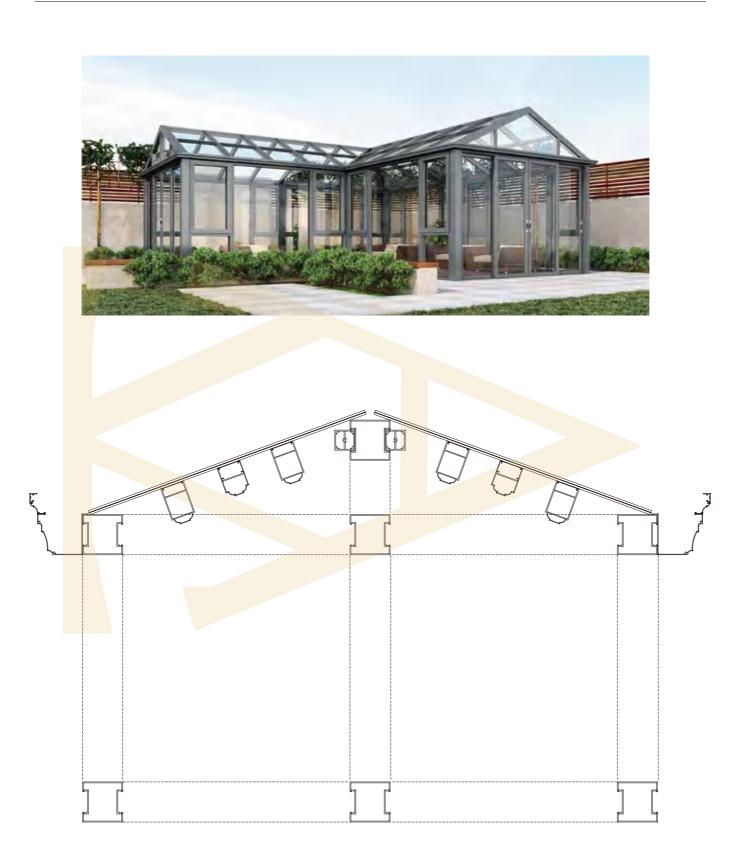

## 100 SERIES SUNROOM

# MEI CHEN

High-end
High quality doors and windows
provide you with more choices,
allowing you to live without boundaries, feel the fresh air from nature,
soothe your soul, and enjoy comfort.








# HIGH-END SYSTEM DOORS AND WINDOWS



## **GLASS SERIES**

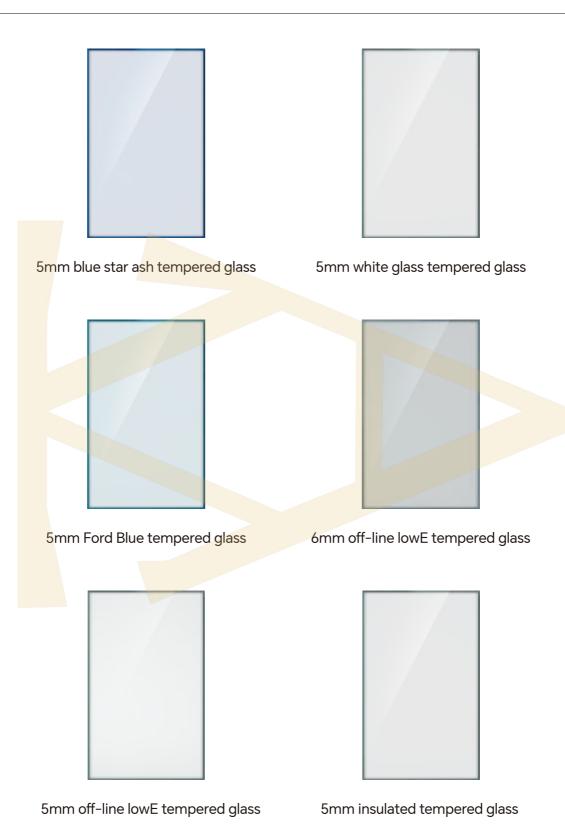

## **GLASS SERIES**



White glass

Ultraviolet blocking rate: 12.9%. Infrared blocking rate: 318.7%. Visible light transmittance: 94.8%.



Ford Blue coated glass

Ultraviolet blocking rate: 89.4%. Infrared blocking rate: 55.5%. Visible light transmittance: 26.6%.



Laminated white glass

Ultraviolet blocking rate: 96.3%. Infrared blocking rate: 30.9%. Visible light transmittance: 87.5%.



White glass insulating glass


Ultraviolet blocking rate: 21.4%. Infrared blocking rate: 35.0%. Visible light transmittance: 92.0%.



Insulating glass


Ultraviolet blocking rate: 35.5%. Infrared blocking rate: 94.9%. Visible light transmittance: 74.5%.

## **GLASS SERIES**

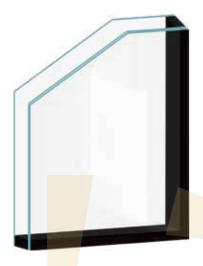


# Single-sided laminated insulating glass

Impact resistance level:3 Sound insulation and heat insulation level:4

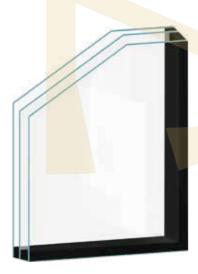

# Three glass two cavity insulating glass

Impact resistance level:3 Sound insulation and heat insulation level:5

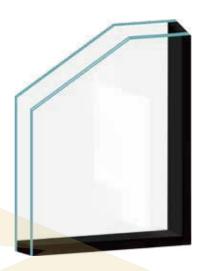

## Double-sided laminated insulating glass

Impact resistance level:2 Sound insulation and heat insulation level:3



### IDouble insulating glass

Impact resistance level:5 Sound insulation and heat insulation level:4



### Laminated glass

Impact resistance level:3 Sound insulation and heat insulation level:2



Tel: +971 56811168 / +971 544771239

Email: info@beitalkareema.com

Add: 5 17A St, Al Khabaisi, Dubai P.O.Box 10776